


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

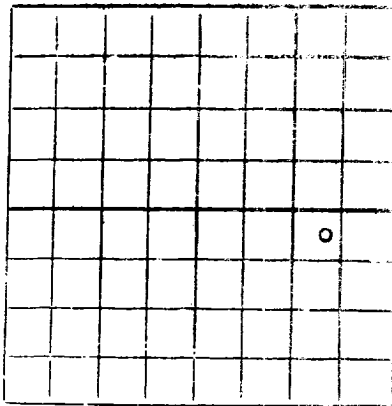

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Records Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Fred Pool Drilling Company
(Company or Operator)

Superior State
(Lease)

Well No. 2, in NE 1/4 of SE 1/4 of S. 8, T. 25 S, R. 30 E, NMPM.

Corral Canyon

Eddy

County.

Well is 1980 feet from South line and 660 feet from East line

of Section 8. If State Land the Oil and Gas Lease No. is B-10678

Drilling Commenced 2-27-63, 1963 Drilling was Completed 3-28, 1963

Name of Drilling Contractor Fred Pool Drilling Company

Address 103 Allen Building, Midland, Texas

Elevation above sea level at Top of Tubing Head 3241.6' The information given is to be kept confidential until 19

CO. SANDS OR ZONES

No. 1, from 3740 to 3763 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPREGNANT WATER SANDS

Include data on rate of water inflow and elevation to which it rises in here.

No. 1, from to feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

RECEIVED

MAY 27 1963

STANDARD OIL CO.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF JOINT	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	24#	Used	570				
5-1/2"	14#	New	3739				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8-5/8"	570	165	pump		
7-7/8	5-1/2"	3739	75	pump		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of lbs. of Gas. used, interval treated or shot) JUN 20 1963

S. O. C.
OFFICE

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface 3940 feet to feet, and from feet to feet.
Cable tools were used from 3940 feet to 3963 feet, and from feet to feet.

PRODUCTION

Put to Producing May 6, 63, 19
OIL WELL: The production during the first 24 hours was 55 barrels of liquid of which 20 % was oil; 80 % was emulsion; % water; and % was sediment. A.P.I. Gravity 40° API
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy	1053		T. Devonian		T. Ojo Alamo
T. Salt	2647		T. Silurian		T. Kirtland-Fruitland
B. Salt	3428		T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen			T. Ellenburger		T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres			T. Granite		T. Dakota
T. Glorieta	Delaware 3740		T.		T. Morrison
T. Drinkard			T.		T. Penn.
T. Tubbs			T.		T.
T. Abo			T.		T.
T. Penn.			T.		T.
T. Miss.			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	40	40	Sand & caliche				
40	250	210	Sand - red beds				
250	615	365	Sand & gyp				
615	625	10	Lime				
625	1053	428	Anhydrite & shale				
1053	2647	1594	Anhydrite				
2647	2842	195	Anhydrite & salt				
2842	2932	90	Anhydrite				
2932	3252	320	Salt				
3252	3667	415	Anhydrite				
3667	3683	16	Shale				
3683	3763	80	Shale & sand				
	TD						

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator Fred Pool Drilling Company

May 23, 1963 Ralph H. Winey (Date)
Address Mr. Ralph H. Winey, 713 First National Bank Bldg., Midland, Texas
Title: Agent