

OCT 12 1982

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

NM OIL CONS. COM. 310N
Drawer DD
Artesia, NM 88216

Form Approved
Budget Bureau No. 42-R1424

45P

O. C. D.

ARTESIA, OFFICE SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 7-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR

Perry R. Bass

3. ADDRESS OF OPERATOR

P. O. Box 2760 Midland, Texas 79702

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 660' FSL & 1980' FWL Unit Letter N

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) 7" CSG.

SUBSEQUENT REPORT OF:

5. CASE NO. 068431

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

Poker Lake Unit

8. FARM OR LEASE NAME

Poker Lake Unit

9. WELL NO.

59

10. FIELD OR WILDCAT NAME

Wildcat and

11. SEC., T., R., M., OR BLM. AND SURVEY OR AREA

Sec. 8, T24S, R30E


12. COUNTY OR PARISH

Eddy

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3196.7' GL

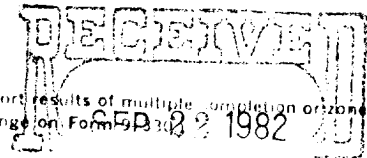

(7-011) Report results of multiple completion or zone change on Form 7-331-C

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Drilled 8-3/4" hole to 11,500' 9-12-82.

Ran 102 jts. 7" 23# S-95 LT&C csg. & 179 jts. 7" 23# N-80 LT&C csg. F O

Tool @ 3180' & B O Sleeve # 3178'. Circ csg. pumped 20 bbls CW-100 Mud Flush cement with 100 sx Class "H" with additives. Plug down @ 2:30 a.m. 9-13-82.

Did not bump plug. Float held OK. WOC & NU BOPE C/O DC & DP 42-1/2 hrs.

Test BOPE to 2000 psi OK. Drill cement float & shoe, test csg. seat to 600 psi OK.

Drilling 6-1/4" hole 9-15-82.

Subsurface Safety Valve: Manu. and Type

N/A

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

P. C. Hantelens

Sr. Prod. Clerk

DATE

9-20-82

ACCEPTED FOR RECORD

(ORIG. SGD.) DAVID R. GLASS

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL

OCT 8 1982

DATE

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.