

Form 3160-5
(June 1990)

RECEIVED

SEP 21 10 51 AM '93

NM OIL CONS COMMISSION
Drawer DD
Artesia, NM 88210

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Fortson Oil Company

3. Address and Telephone No.

301 Commerce, Ste 3301, Fort Worth, TX 76102

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FSL & 660' FWL of Sec. 19, T-24-S, R-31-E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other Spud & Surface Casing

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off


☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

A seventeen and one-half inch hole was spudded by JSM Drilling Co. September 16, 1993, and drilled to a depth of 700' K.B. Sixteen joints of 13.375" 48#/ft., H-40, 8rd casing was run and set at 701.96' K.B. Cemented with 350 sacks Class "C" Lite with 2% CACL2; 4% gel, and 1/4" Cello-Seal/sk. (1.74 cu.ft./sk yield, 13.5#/gallon). Tailed in with 300 sacks Class "C" with 2% CACL2 and 1/4" Cello-Seal/sk. (1.32 cu.ft./sk. yield, 14.8#/gallon). Displaced with 105 barrels fresh water. Plug down at 3:05 PM September 17, 1993. Circulated 213 sacks cement to surface. Wait on cement 24 hours. Tested hydril and casing to 1000 psig with rig pump, O.K.

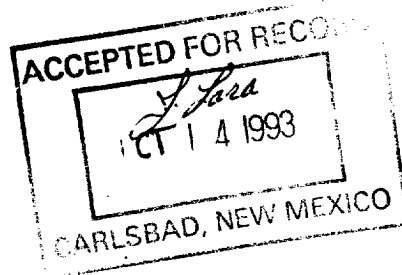

14. I hereby certify that the foregoing is true and correct

Signed

Sheyl A. Jones

Title Agent for Fortson Oil Co.

Date

9/15/93

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side