

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

OIL CONS COMMISSION  
Drawer DD  
Artesia, NM 88210

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT--" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Southwest Royalties, Inc.

3. Address and Telephone No.

P.O. Box 11390, Midland, Texas 79702 (915) 686-9927

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

400' FSL & 600' FEL Sec. 35, T-25-S, R-29-E

5. Lease Designation and Serial No.

NM - 54290

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

N/A

8. Well Name and No.

North Brushy Draw "A" 35

9. API Well No. Federal #4

10. Field and Pool, or Exploratory Area

North Brushy Draw (Delaware)

11. County or Parish, State

Eddy, New Mexico

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Set 5-1/2" Casing

☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

2-19-94: Ran 5744', 5-1/2", J-55, 15.5# casing. DV tool set @ 5043'; cemented w/190 sx Cl "H" w/.4% FL-62 .3% CD-32 & 10% EC-1; bumped plug, dropped bomb to open DV tool and circulate 4 hours. Circulated 16 sx cement to surface. Cemented 2nd stage w/325 sx Cl "C" lite w/5 PPS A-5 and 1/4 PPS celloflakes. Tailed w/100 sx Cl "C" neat.

Pressure to 600 # - Held okay.

WOC 18 + hours.

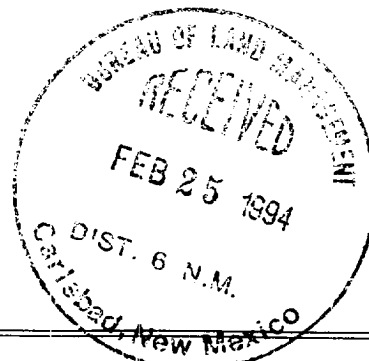

14. I hereby certify that the foregoing is true and correct

Signed

*[Signature]*

Title

Regulatory Agent

Date

2-24-94

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: