

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Form C-144
June 1, 2004

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCDDistrict Office.
For downstream facilities, submit to Santa Fe office.

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐
Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: **CONOCOPHILLIPS COMPANY** Telephone: (505) 599-3419 e-mail address: **juanita.r.farrell@conocophillips.com**
Address: **5525 HWY 64 FARMINGTON NM 87401**
Facility or well name: **SAN JUAN 29-6 UNIT 214A** API#: **30-039-27562** U/I or Qtr/Qtr **P** Sec **3** T **29N** R **6W**
County: **RIO ARRIBA** Latitude _____ Longitude _____ NAD: 1927 ☐ 1983 ☐ Surface Owner Federal ☒ State ☐ Private ☐ Indian ☐

Pit

Type: Drilling ☒ Production ☐ Disposal ☐

Workover ☐ Emergency ☐

Lined ☒ Unlined ☐

Liner type: Synthetic ☒ Thickness **12** mil Clay ☐

Pit Volume _____ bbl

Below-grade tank

Volume: _____ bbl Type of fluid: _____

Construction material: _____

Double-walled, with leak detection? Yes ☐ If not, explain why not. _____

Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	50 feet or more, but less than 100 feet	(10 points)
	100 feet or more	(0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes	(20 points)
	No	(0 points)
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral water courses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points)
	1000 feet or more	(0 points)
Ranking Score (Total Points)		40

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite ☒ offsite ☐ If offsite, name of facility _____ (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☒ Yes ☐ If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments:

This drill pit was closed on 06/29/2004 as per COPC general plan on file with OCD. A one-foot clay cap was used to keep liner and remains in place. Attached are sample analysis of waste remaining in encapsulated reserve pit.

Ranking score calculation:

Depth to ground water: 50-100' (10 pts) Wellhead protection: 200-1000' (20 pts) Distance to surface water: 200-1000' (10 pts)

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCDD guidelines ☐, a general permit ☒, or an (attached) alternative OCD-approved plan ☐.

Date: **09/06/2004**

Printed Name/Title **Juanita Farrell Regulatory Analyst**

Signature *Juanita Farrell*

Your certification and NMOCDD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval:

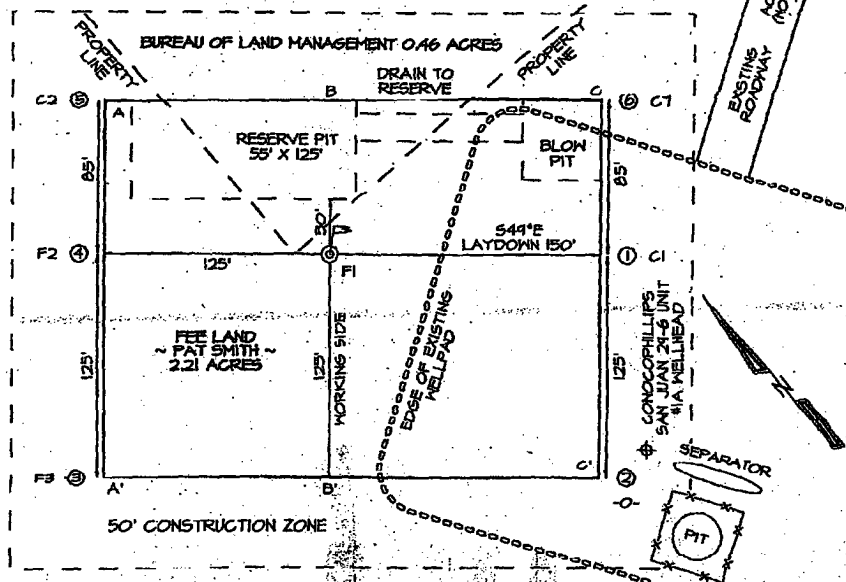
DEPUTY OIL & GAS INSPECTOR, DIST. #3

Printed Name/Title

Signature *Denny Farrel*

Date: **SEP 21 2004**

LATITUDE: 36.75103° N
LONGITUDE: 107.44354° W



A-A'						
6421'						
6411'						
6401'						

B-B'						
6421'						
6411'						
6401'						

C-C'						
6421'						
6411'						
6401'						

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons


Client:	ConocoPhillips	Project #:	96052-026-000
Sample ID:	29-6 #214 A	Date Reported:	06-26-04
Laboratory Number:	29296	Date Sampled:	06-23-04
Chain of Custody No:	12343	Date Received:	06-24-04
Sample Matrix:	Soil	Date Extracted:	06-25-04
Preservative:	Cool	Date Analyzed:	06-26-04
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	1.3	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	1.3	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Reserve Pits.


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-026-000
Sample ID:	29-6 #214 A	Date Reported:	06-26-04
Laboratory Number:	29296	Date Sampled:	06-23-04
Chain of Custody:	12343	Date Received:	06-24-04
Sample Matrix:	Soil	Date Analyzed:	06-26-04
Preservative:	Cool	Date Extracted:	06-25-04
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	1.8
Toluene	ND	1.7
Ethylbenzene	30.9	1.5
p,m-Xylene	270	2.2
o-Xylene	72.1	1.0
Total BTEX	373	


ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98 %
	1,4-difluorobenzene	98 %
	Bromochlorobenzene	98 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Reserve Pits.


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW


EC, SAR, ESP, CI Analysis


Client:	ConocoPhillips	Project #:	96052-026-000
Sample ID:	29-6 #214 A	Date Reported:	06-26-04
Laboratory Number:	29296	Date Sampled:	06-23-04
Chain of Custody:	12343	Date Received:	06-24-04
Sample Matrix:	Soil	Date Extracted:	06-25-04
Preservative:	Cool	Date Analyzed:	06-26-04
Condition:	Cool & Intact		

Parameter	Analytical Result	Units
Conductivity @ 25° C	4.190	mmhos/cm
Calcium	642	mg/Kg
Magnesium	<0.01	mg/Kg
Sodium	710	mg/Kg
Sodium Absorption Ratio (SAR)	10.9	ratio
Exchangeable Sodium Percent (ESP)	8.8	percent
Chloride	334	mg/Kg

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983.

Comments: Reserve Pits.


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

TRACE METAL ANALYSIS

Client:	ConocoPhillips	Project #:	96052-026-000
Sample ID:	29-6 #214 A	Date Reported:	06-26-04
Laboratory Number:	29296	Date Sampled:	06-23-04
Chain of Custody:	12343	Date Received:	06-24-04
Sample Matrix:	Soil	Date Analyzed:	06-26-04
Preservative:	Cool	Date Digested:	06-25-04
Condition:	Cool & Intact	Analysis Needed:	RCRA Metals

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
Arsenic	0.012	0.001	5.0
Barium	0.432	0.001	100
Cadmium	ND	0.001	1.0
Chromium	0.001	0.001	5.0
Lead	0.001	0.001	5.0
Mercury	ND	0.001	0.2
Selenium	0.007	0.001	1.0
Silver	ND	0.001	5.0


ND - Parameter not detected at the stated detection limit.


References: Method 3050B, Acid Digestion of Sediments, Sludges and Soils.
SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emission Spectroscopy, SW-846, USEPA, December 1996.

Note: Regulatory Limits based on 40 CFR part 261 subpart C
section 261.24, August 24, 1998.

Comments: **Reserve Pits.**


Analyst


Review