


devon	OPERATOR: Devon Energy Prod. Co.	LEASE / WELL: NEBU 334	SURFACE LOCATION: 965' FNL & 1,080' FEL	BOTTOM HOLE LOCATION: 950' FNL & 1,800' FEL
	DRILLING RIG: D-J 1	FORMATION: Dakota	Sec. 26 - T31N - R7W	Sec. 26 - T31N - R7W
	COMPLETION RIG:	COUNTY / STATE: San Juan County, NM	AFE #: DK 110513	API#: 30-045-32297
			PROPERTY #: 015575-010-S01	SPUD DATE: 5/29/2004

WELL DATA				
DIRECTIONAL	STRAIGHT	TVD		
KOP: 350'				
BEGIN BUILD 3.00 deg @ 100'	MD			
BEGIN HOLD 15.57 deg @ 868'	MD			
BEGIN DROP (3.00) deg @ 3030'	MD			
BEGIN VERTICAL deg @ 3549'	MD			

TUBULAR DATA						
Tubulars	Size	Weight	Grade	Thread	MD	TVD
CONDUCTOR						
SURFACE	9 5/8"	32.3#	H-40	ST&C	310'	
INTERMEDIATE	7"	23#	J-55	LT&C	3,561'	
PRODUCTION	4 1/2"	11.6#	J-55	LT&C	7,970'	
PROD TIEBACK						
PROD LINER						
TUBING (Long String)						

WELLHEAD DATA	
ELEVATIONS:	GROUND ELEVATION
RKB-THF:	6,318'
RKB-ELEV:	
FIELD:	San Juan

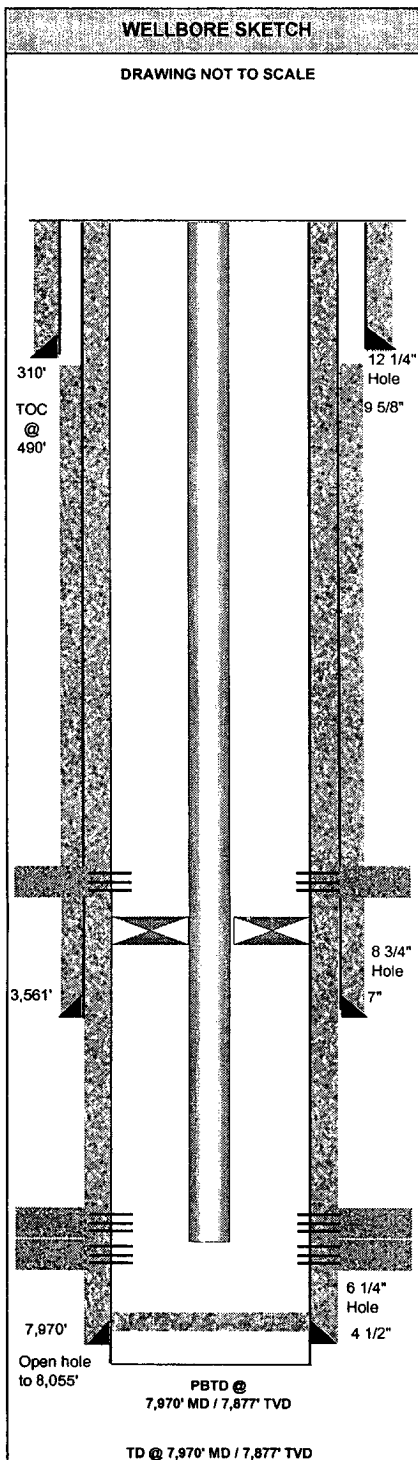

EQUIPMENT DESCRIPTION		DEPTH TVD	DEPTH MD
CEMENT DETAILS:			
(5/30/04)	9 5/8" csg to 310', cmt w/175 sx (37 bbls) Class "B". Circ 10 bbls to surface		
(6/4/04)	7" csg to 3,561', cmt Lead w/475 sx (122 bbls) 50/50 POZ & tail w/75 sx (19 bbls) 50/50 POZ. No returns to surface.		
(5/3/04)	4 1/2" csg to 7,840', cmt Lead w/235 sx 50/50 POZ & tail w/450 sx 50/50 POZ. Circ 25 bbls cmt to surface.		
Tubing Details:			
	Saw Tooth Collar		
	2 3/8"x2' Pup jt		
	2 3/8" x 1.78" F-Profile Nipple		
	137 jts 2 3/8" tbg		
	4 1/2" x 2 3/8" Model R Dual Grip Pkr		3,456'
	106 jts 2 3/8" tbg		7,919'
	EOT		
Packer and tubing were run into hole on 8/19/04 between 7:30 am and 10:00 am.			
(6/20/04) Perforate Pictured Cliffs:			
	3325', 3326', 3327', 3333', 3340', 3341', 3349', 3350', 3351', 3352', 3388', 3397', 3398', 3412', 3413', 3414'		
	16 Holes.		
(6/20/04)	Frac'd w/ 41,112 gals 70Q 20# Linear gel w/69,500# 20/40 Brady. Screen out of 23.7 BPM @ 4500 psi		
	Avg rate 24.3. Avg pressure 2679 psi (max 4599 psi). F. G. = 1.24 psi/ft.		
(6/19/04) Perforate Dakota:			
	7938', 7937', 7923', 7922', 7914', 7913', 7898', 7897', 7882', 7881', 7880', 7879', 7878', 7844', 7843', 7842'		
	7840', 18 Holes.		
(6/19/04)	Frac'd w/72,459 gals 25# & 20# Delta 200 w/55,000# Ottawa. V-12 overheated could not get 30-35 BPM. F. G. = 0.79 psi/ft.		
(8/19/04)	Cmt retainer set @ 7,965'.		
COMMENTS:			
AFE # 110514 = PC	Working Interest:	PLUG BACK DEPTH:	7877'
Property # 015576-010-S01 = PC	Net Revenue Interest:	TOTAL WELL DEPTH:	7877'
Completed in Dakota & Pictured Cliffs		PREPARED OR REVISED BY:	Melisa Zimmerman
		DATE:	November 22, 2004

CURRENT

DIRECTIONS TO LOCATION: