

ENERGEN RESOURCES CORPORATION

W.O. Hughes #6

Rio Arriba, NM

West Lindrith Gallup Dakota/Niobrara

Current Conditions

Pumping Unit

3/7/2014

Conductor:

Surface Casing:

13-3/8" 48# H-40 @ 412'

Cemented with 556 cu.ft.

TOC @ 0'

Intermediate Casing:

8 5/8" 24# K-55 @ 3300'

Cemented with 1346 cu.ft.

TOC @ 0'

Formations:

Ojo Alamo - 2500'

Pictured Cliffs - 2980'

Cliffhouse - 4702'

Menefee - 4731'

Point Lookout - 5152'

Mancos - 5362'

Gallup - 6330'

Dakota - 7286'


Production Casing:

4 1/2" 10.5# J-55 set @ 7601'

DV Tool @ 5424'

Cemented with 2495 cu.ft.

TOC @ 0'

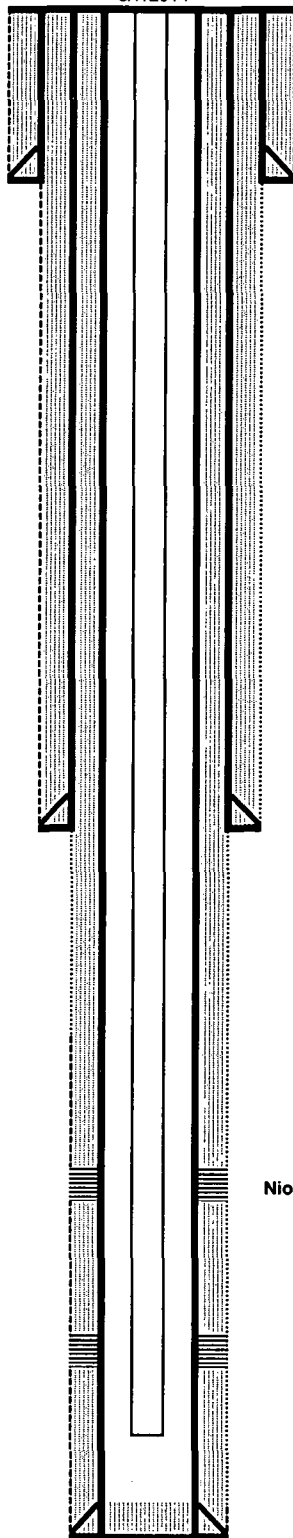

GL Elevation: 6871'

KB Elevation: 6883'

Township: 24N

Range: 03W

Section: 8

Unit: J

Footage: 1743' FSL & 1341' FEL

API # 30-039-23240

30-039-23240

Tubing Detail (Last Available)

#Jts	O.D.	Weight	Grade	Packer	SN	EOT	Tally Date
227	2 3/8"	4.7#	J-55		7457'KB		
1	2 3/8"	4.7#	J-55			7492'KB	

Rod Detail (Last Available)

#Rods	Length	Size/Type	Pump	Ponies	PR	PRL	Date Run
89	2253'	7/8"					
205	7428'	3/4"					

Niobrara Perfs: 6335'-6539

36 holes with 2 SPF

DK Perfs: 7308'-7342', 7400'-7404', 7484'-7504'

65 holes with 1 SPF

PBTD: 7557'

TD: 8700'