




Downhole Well Profile - with Schematic

Well Name: Humble N Kirtland 01E

API/UWI 30045238660000	XTO Accounting ID 67541	Permit Number	State/Province New Mexico	County San Juan
Location T30N-R14W-S13	Spud Date 1/8/1980 00:00	Original KB Elevation (ft) 5,903.00	Ground/Corrected Ground Elevation (ft) 5,891.00	KB-Ground Distance (ft) 12.00

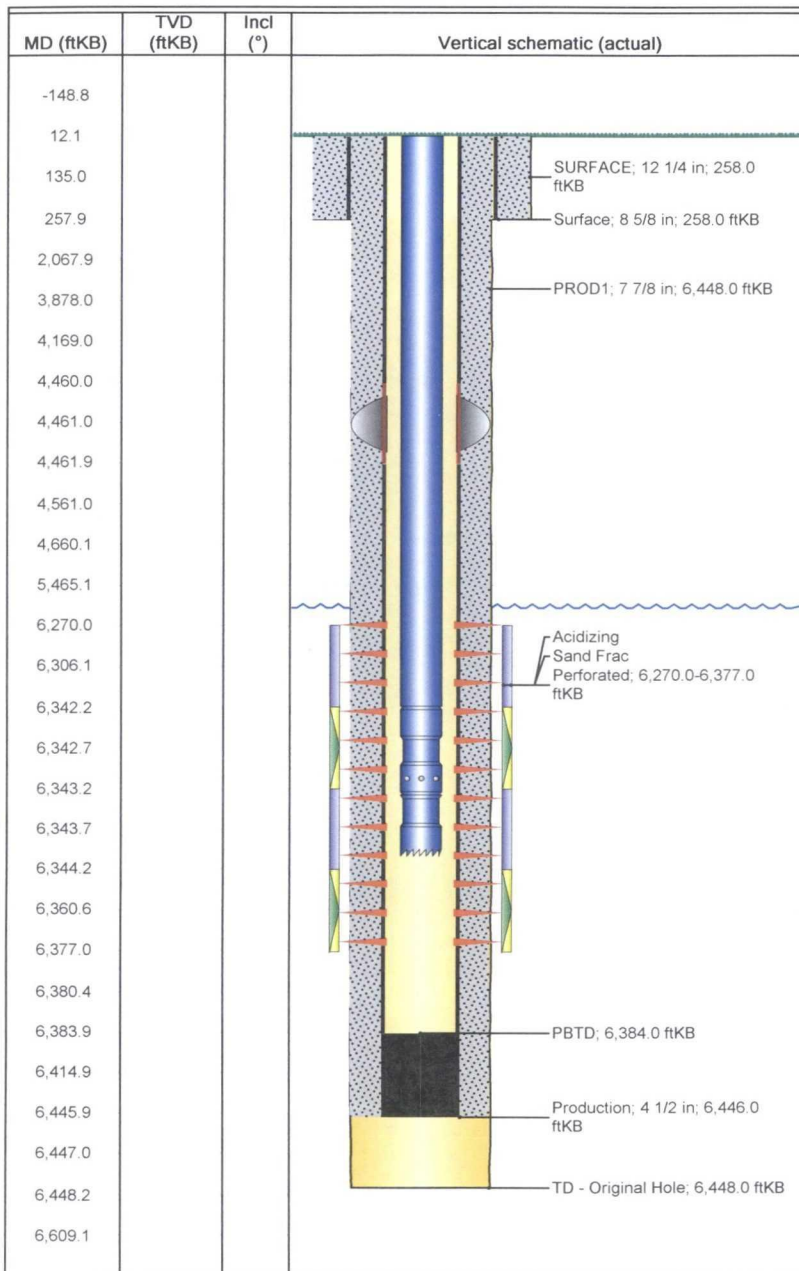

Wellbores							
Wellbore Name Original Hole		Parent Wellbore Original Hole		Wellbore API/UWI 30045238660000			
Start Depth (ftKB) 12.0		Profile Type Vertical		Kick Off Depth (ftKB)			
Section Des	Size (in)	Act Top (ftKB)		Act Btm (ftKB)			
SURFACE	12 1/4	12.0		258.0			
PROD1	7 7/8	258.0		6,448.0			
Zones							
Zone Name	Top (ftKB)	Btm (ftKB)		Current Status			
Dakota	6,270.0	6,377.0					
Casing Strings							
Csg Des	Set Depth (ftKB)	OD (in)	Wt/Len (lb/ft)	Grade			
Surface	258.0	8 5/8	24.00	K-55			
Production	6,446.0	4 1/2	10.50	K-55			
Cement							
Des	Type		String				
Surface Casing Cement	Casing		Surface, 258.0ftKB				
Production Casing Cement	Casing		Production, 6,446.0ftKB				
Tubing Strings							
Tubing Description Tubing - Production		Run Date 7/1/2005		Set Depth (ftKB) 6,344.0			
Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
Tubing	2 3/8	4.70	J-55	195	6,330.14	12.0	6,342.1
Seat Nipple	2 3/8		J-55		1.10	6,342.1	6,343.2
Notched Collar	2 3/8				0.76	6,343.2	6,344.0
Rod Strings							
Rod Description		Run Date			Set Depth (ftKB)		
Item Des	OD (in)	Wt (lb/ft)	Grade	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)
Other In Hole							
Run Date	Des	OD (in)	Top (ftKB)		Btm (ftKB)		
Perforations							
Date	Top (ftKB)	Btm (ftKB)		Zone			
2/28/1980	6,270.0	6,377.0		Dakota, Original Hole			
Stimulations & Treatments							
Frac #	Top Perf (ftKB)	Bottom Perf (ftKB)	AIR (bbl/min)	MIR (bbl/min)	TWP (bbl)	Total Proppant (lb)	
1.00	6270	6377					
1.00	6270	6377					