

DISTRICT I

1625 N. French Dr. Hobbs, NM 88240

DISTRICT II

1301 W. Grand Ave., Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM

87505

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

WELL API NO.

30-045-07866

5. Indicate type of Lease

STATE ☐

FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

Sullivan

8. Well No.

3

9. OGRID Number

010715

10. Pool name or Wildcat

Aztec Pictured Cliffs

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

OIL
WELL ☐

GAS
WELL ☒

OTHER

2. Name of Operator

McKay Oil and Gas LLC

3. Address of Operator

P.O. Box 14738, Albuquerque, NM 87191

4. Well Location

Unit Letter **H** : **1750** Feet From The **North** Line and **1000** Feet From The **East** Line

Section **29** Township **29N** Range **10W** NMPM County **San Juan**

11. Elevation (Show whether DF, RKB, RT, GR, etc.)

5508' KB

Pit or Below-grade Tank Application ☒ or Closure ☐

Pit type **Lined** Depth to Groundwater **<50'** Distance from nearest fresh water well **>1000'** Distance from nearest surface water **<200'**

Pit Liner Thickness: **12** mil Below-Grade Tank: Volume bbls; Construction Material:

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐


CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

McKay Oil and Gas proposes to plug and abandon the subject well as follows:

1. Construct lined cement returns pit, approximately 10' x 10' x 6'.
2. Tie into 2 7/8" casing and establish circulation with 10 bbls of water.
3. Mix and pump 100 sx (118 cf) of Class B cement to fill entire wellbore.
4. Shut down and WOC. Verify cement level at surface.
5. Cut off wellhead, erect dry hole marker, and remove equipment from location.

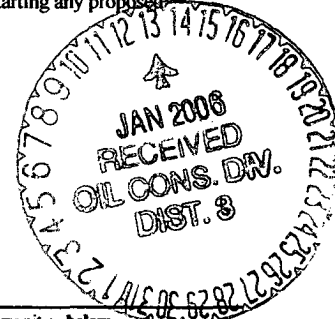

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒ a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Dana L. Delventhal TITLE Agent DATE 01/10/06

Type or print name **Dana L. Delventhal**
For State Use Only

E-mail address: **ddelventhal@qwest.net**

Telephone No. **505-326-4125**

APPROVED BY:

DEPUTY OIL & GAS INSPECTOR, DIST. 3

DATE

JAN 13 2006

Conditions of Approval (if any):

Sullivan No. 3 (As Is)

1750' FNL, 1000' FEL
Sec. 29, T29N, R10W


8 5/8" CSA 135'
CMT W/ 650 CF CMT

4 1/2"
CASING SET AT 1767'
W/ 560 CF CMT

2 7/8" TBG AT 1916'

2520'
OTERO CHACRA
2954'

Perfs: 1774' - 1814'

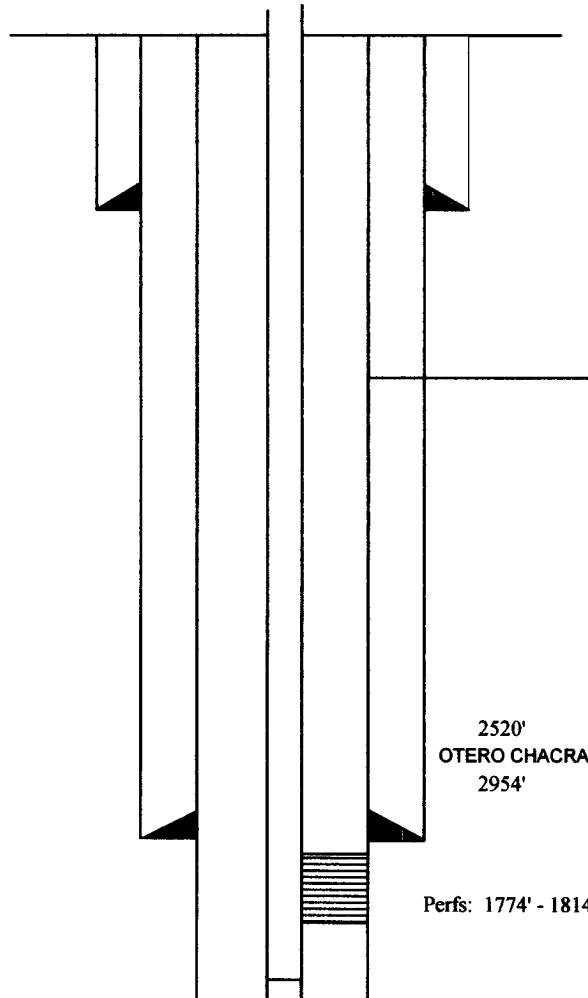

Sullivan No. 3 (Proposed)

1750' FNL, 1000' FEL
Sec. 29, T29N, R10W

8 5/8" CSA 135'
CMT W/ 650 CF CMT

4 1/2"
CASING SET AT 1767'
W/ 560 CF CMT

2 7/8" TBG AT 1916'

2520'
OTERO CHACRA
2954'

Perfs: 1774' - 1814'

