


Well Name: Kline 10-4

API/UWI 3004533545	Surface Legal Location	Field Name Basin(New Mexico)	License # 000000	State/Province New Mexico	Well Configuration Type Land
Original KB Elevation (ft) 5,775.00	KB-Tubing Head Distance (ft)	Spud Date 7/31/2007 00:00	Rig Release Date	PBTD (All) (ftKB) Original Hole - 2,256.0	Total Depth All (TVD) (ftKB) Original Hole - 2,184.6

Land, Original Hole, 3/28/2018 9:45:24 AM

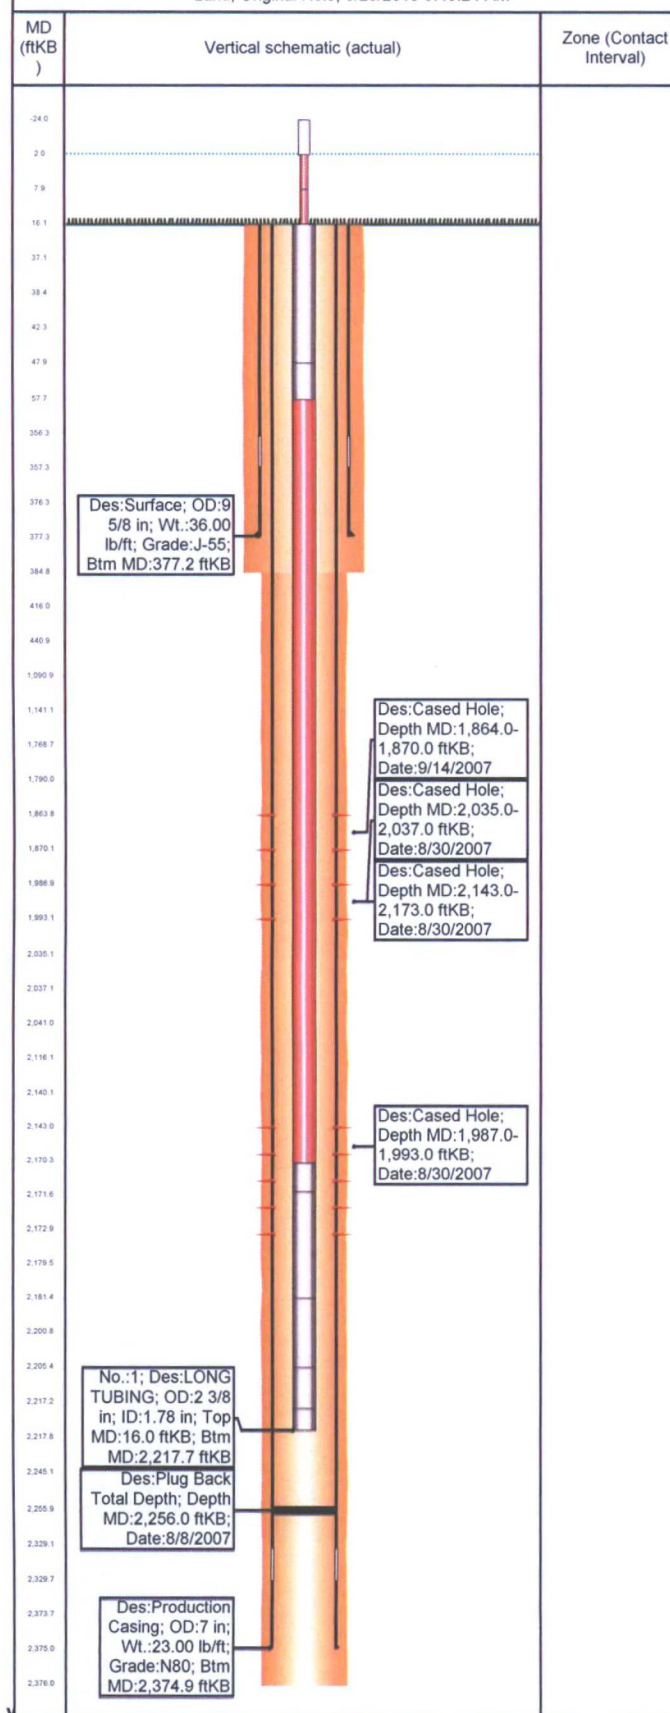

Casing Strings

Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Top Thread	Top (ftKB)	Set Depth (ftKB)
Surface 12.25	9 5/8	36.00	J-55	EXT-UPSET	16.0	377.2
Production Casing 8.75	7	23.00	N80	LTC	16.0	2,374.9

Cement

Description	Comment
-------------	---------

Perforations

Date	Top (ftKB)	Btm (ftKB)	Shot Dens (shots/ft)
9/14/2007	1,864.0	1,870.0	4 spf .49" 24
8/30/2007	1,987.0	1,993.0	2 spf 18
8/30/2007	2,035.0	2,037.0	2 spf
8/30/2007	2,143.0	2,173.0	2 spf 60

Tubing Strings

Tubing Description		Run Date	String Length (ft)		Set Depth (ftKB)		
LONG TUBING		10/9/2007	2,201.71		2,217.7		
Jts	Item Des	OD (in)	Len (ft)	Top (ftKB)	Btm (ftKB)	Grade	Wt (lb/ft)
1	SLICK JOINT (ELSTER)	2 3/8	31.80	16.0	47.8	J-55	4.70
1	PUP JTS	2 3/8	10.00	47.8	57.8	J-55	4.70
66	TUBING	2 3/8	2,112.56	57.8	2,170.4	J-55	4.70
1	SEATING NIPPLE	2 3/8	1.08	2,170.4	2,171.4	J-55	4.70
1	PUP JTS	2 3/8	10.00	2,171.4	2,181.4	J-55	4.70
1	OTHER, TBG SCREEN 12 SLOT	2 3/8	23.87	2,181.4	2,205.3	J-55	4.70
1	PUP JTS	2 3/8	12.00	2,205.3	2,217.3	J-55	4.70
1	OTHER-PLUG	2 3/8	0.40	2,217.3	2,217.7	J-55	4.70

Rod Strings

Rod Description Long Rod		Run Date 10/9/2007	String Length (ft) 2,164.00		Set Depth (ftKB) 2,140.0	
Jts	Item Des	OD (in)	Len (ft)	Top (ftKB)	Btm (ftKB)	
	POLISHED ROD	1 1/4	26.00	-24.0	2.0	
	PONY ROD	3/4	6.00	2.0	8.0	
	PONY ROD	3/4	8.00	8.0	16.0	
16	ROD	3/4	400.00	16.0	416.0	
1	ROD	3/4	25.00	416.0	441.0	
26	ROD	3/4	650.00	441.0	1,091.0	
2	ROD	3/4	50.00	1,091.0	1,141.0	
36	ROD	3/4	900.00	1,141.0	2,041.0	
3	ROD	3/4	75.00	2,041.0	2,116.0	
3	DOWN HOLE PUMP	1.9	24.00	2,116.0	2,140.0	

PBTD ~~2256'~~ 2256' Basin FRUDC
TD 2382'

Cement to surface 210 sx Class G 0'-381'
production csg 0'-2382' 415 sx Class G
Prod Htg 2.375" set 2218'