

submitted in lieu of Form 3155

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Rcvd
1-26-07 ROVD JAN260

Sundry Notices and Reports on Wells

2001 FEB 28 PM 5:00

OIL CONS. DIV.

1. Type of Well
GAS

2. Name of Operator

**BURLINGTON
RESOURCES**

OIL & GAS COMPANY

3. Address & Phone No. of Operator

PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M

1535' FNL, 850' FWL, Sec. 11, T-30-N, R-7-W, NMPM

5. Lease Number
NM-012694

6. If Indian, All. or
Tribe Name

7. Unit Agreement Name

San Juan 30-6 Unit

8. Well Name & Number

San Juan 30-6 U #84A

9. API Well No.

30-039-22651

10. Field and Pool

Blanco Mesaverde

11. County and State

Rio Arriba Co, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment

Type of Action

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☒ Altering Casing
☒ Other - Pay add
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut off
☐ Conversion to Injection

13. Describe Proposed or Completed Operations

2-20-01 MIRU. ND WH. NU BOP. TOOH w/176 jts 2 3/8" tbq. SDON.

2-21-01 TIH w/4 1/2" CIBP, set @ 5000'. Load hole w/170 bbl 2% KCl wtr. TOOH. TIH, ran CBL @ 3227-5000', TOC @ 3227' (top of lnr). PT csg & CIBP to 3000 psi, OK. TOOH. TIH, perf Lewis w/1 SPF @ 4005, 4019, 4036, 4093, 4105, 4142, 4172, 4226, 4230, 4234, 4242, 4246, 4251, 4270, 4275, 4284, 4290, 4300, 4310, 4365, 4374, 4382, 4407, 4426, 4446, 4450, 4500, 4504, 4520, 4524, 4550, 4591, 4604, 4614, 4625, 4692, 4694, 4718, 4726, 4730, 4743, 4760, 4772, 4787, 4792, 4805, 4819, 4832, 4850, 4860, 4880, 4892, 4902, 4918, 4925, 4930, 4940, 4958, 4974, 4978' w/60 0.3" diameter holes total. TOOH. SDON.

2-22-01 Acidize w/30 bbl 10 acetic acid. Attempt to frac Lewis. Lost N2 pump. SDON.

2-23-01 Frac Lewis w/921 bbl 20# linear gel, 1,629,000 SC N2, 100,000# 20/40 Arizona sd. CO after frac.

2-24-01 TOOH. TIH w/3 7/8" mill, blow well & CO. Establish circ. Mill out CIBP @ 5000'. TIH, blow well & CO.

2-25-01 Blow well & CO.

2-26-01 Blow well & CO. TOOH w/mill. TIH w/184 jts 2 3/8" 4.7# J-55 EUE tbq, landed @ 5580'. (SN @ 5538'). ND BOP. NU WH. RD. Rig released.

14. I hereby certify that the foregoing is true and correct.

Signed [Signature] Title Regulatory Supervisor Date 2/27/01

(This space for Federal or State Office use)

APPROVED BY _____ Title _____ Date _____

CONDITION OF APPROVAL, if any:

ACCEPTED FOR RECORD

AR 01 2001

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OPERATOR

BY [Signature] OFFICE

Certificate Number

RCVD DEC28/06
OIL CONSV. DIV.
DIST. 3

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
Fee Lease - 3 Copies
State Lease - 4 Copies

☒ AMENDED REPORT

30-045-29095 WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-045-30268		2 Pool Code 97232		3 Pool Name WILDCAT BASIN MANCOS	
4 Property Code		5 Property Name GALLEGOS			6 Well Number 4E
7 OGRID No. 5380		8 Operator Name XTO ENERGY INC.			9 Elevation 6096' GL

10 Surface Location									
UL or lot no.	Section	Township	Range	Lot 1dn	Feet from the	North/South line	Feet from the	East/West line	County
N	33	26N	11W		1190	SOUTH	1800	WEST	SAN JUAN

11 Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot 1dn	Feet from the	North/South line	Feet from the	East/West line	County
12 Dedicated Acres DK: 320 Acres S/2 MC: 160 acres SW/4		13 Joint or Infill		14 Consolidation Code		15 Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

				17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true & complete to the best of my knowledge & belief and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature Holly C. Perkins Printed Name Regulatory Compliance Tech Title 12/21/ 2006 Date	
				18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true & correct to the best of my belief. 10/9/1980 Date of Survey Original Survey Signed By: Fred B Kerr 3950 Certificate Number	

8

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
Fee Lease - 3 Copies
State Lease - 4 Copies

30-045-29095

WELL LOCATION AND ACREAGE DEDICATION PLAT

☒ AMENDED REPORT

1 API Number 30-045-30268		2 Pool Code 97232		3 Pool Name WILDCAT BASIN MANCOS	
4 Property Code		5 Property Name GALLEGOS			6 Well Number 4E
7 OGRID No. 5380		8 Operator Name XTO ENERGY INC.			9 Elevation 6096' GL

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	33	26N	11W		1190	SOUTH	1800	WEST	SAN JUAN

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
---------------	---------	----------	-------	---------	---------------	------------------	---------------	----------------	--------

12 Dedicated Acres DK: 320 Acres S/2 MC: 160 acres SW/4	13 Joint or Infill	14 Consolidation Code	15 Order No.
---	--------------------	-----------------------	--------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

				17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true & complete to the best of my knowledge & belief and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the Division. Signature Holly C. Perkins Printed Name Regulatory Compliance Tech Title 12/21/ 2006 Date	
				18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true & correct to the best of my belief. 10/9/1980 Date of Survey Original Survey Signed By: Fred B Kerr 3950 Certificate Number	

8



RECORD OF SURVEY

JH

**CROSS TIMBERS OPERATING CO.
UTE INDIANS A NO. 30
SAN JUAN COUNTY, NEW MEXICO**

A-02-31N-14W

30-045-30268

**BAKER HUGHES INTEQ
WEST TEXAS DISTRICT**

August 14, 2000


**BAKER
HUGHES**

INTEQ



CROSS TIMBERS OPERATING CO.

Structure : UTE Indians A No.30


Slot : slot #1

Field :

Location : SAN JUAN COUNTY, NEW MEXICO



INTEQ

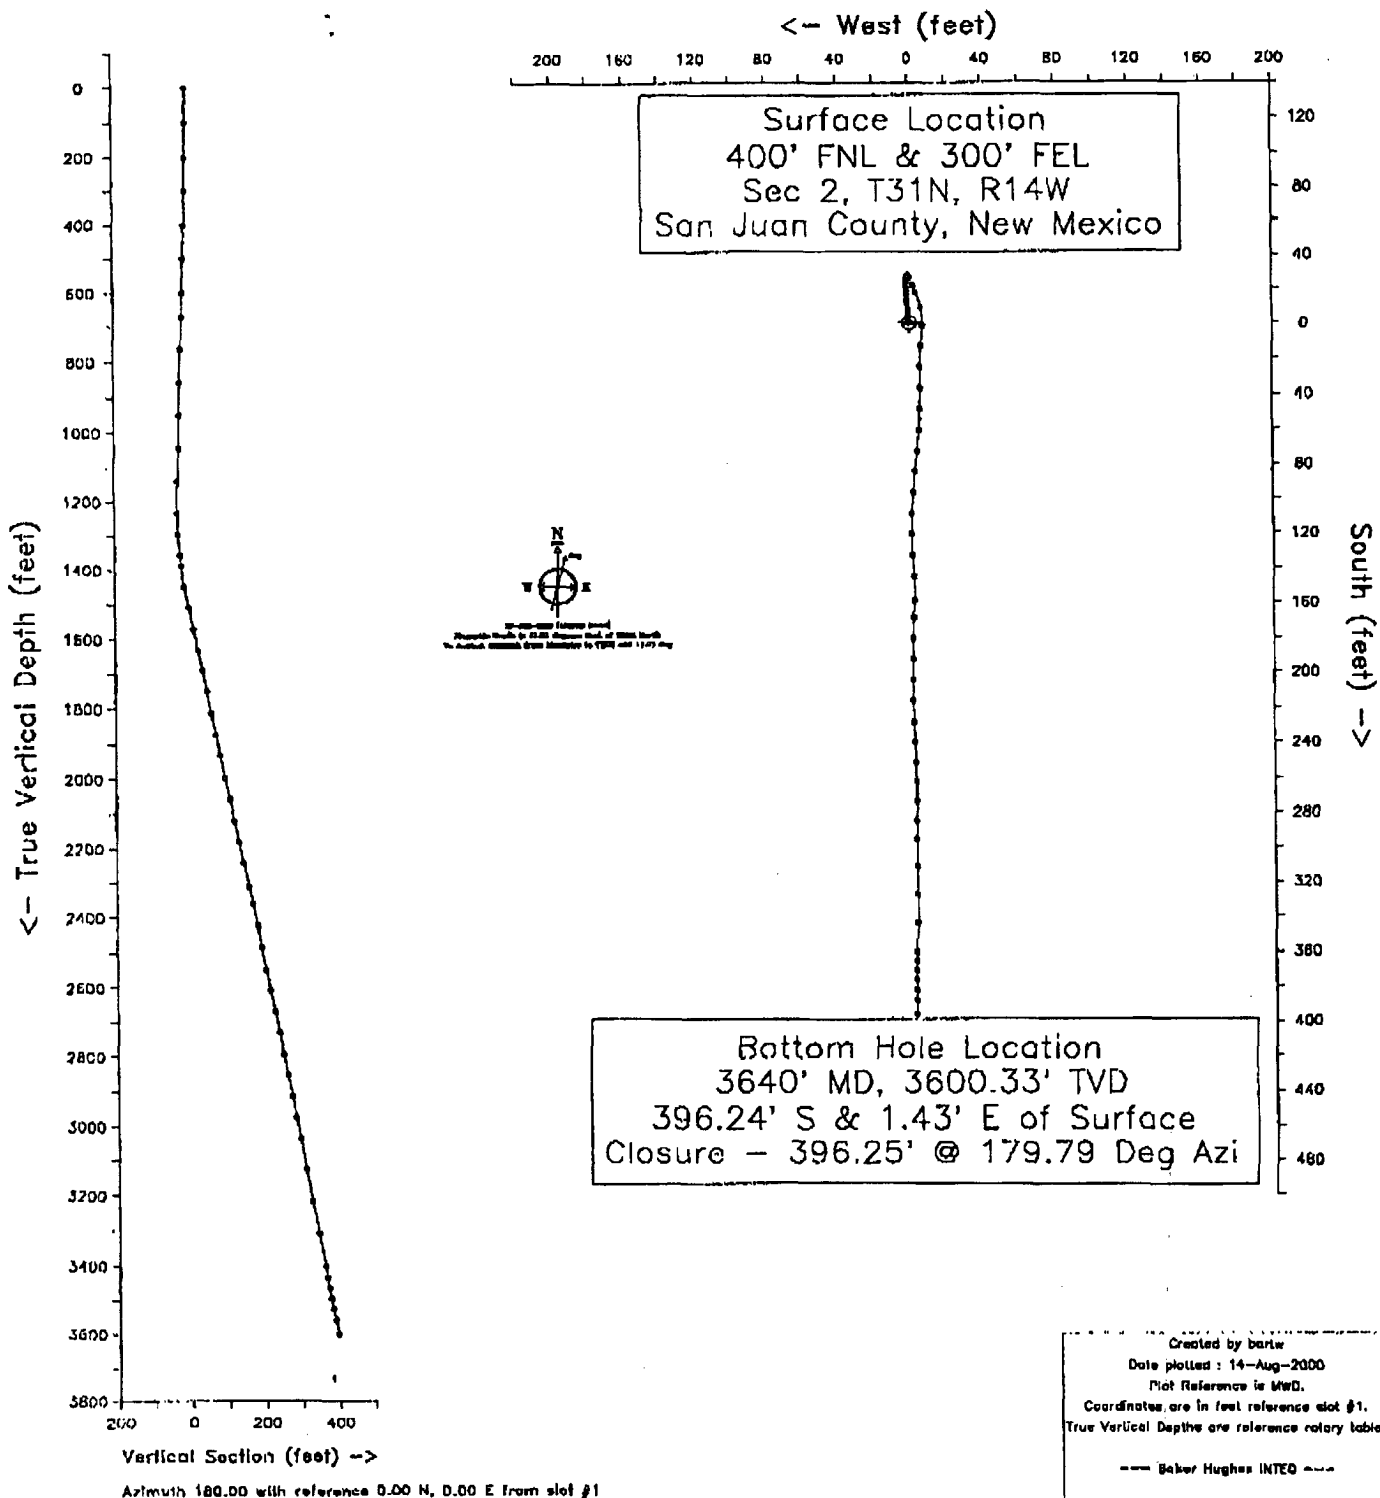

CROSS TIMBERS OPERATING CO.
UTE Indians "A" No.30

slot #1

SAN JUAN COUNTY, NEW MEXICO

S U R V E Y L I S T I N G

by
Baker Hughes INTEQ

Your ref : MRD
Our ref : svy1436
License :

Date printed : 14-Aug-2000
Date created : 14-Aug-2000
Last revised : 14-Aug-2000

Field is centred on 0.000,0.000,999.00000,N.
Structure is centred on n36 56 10.000,w108 16 13

Slot location is n36 56 10.000,w108 16 13.000
Slot Grid coordinates are N 2160303.006, E 372298.547
Slot local coordinates are 0.00 N 0.00 E

Projection type: mercator - New Mexico West (3003), Spheroid: Clarke - 1866

Reference North is True North

SURVEY LISTING Page 1
Your ref : MWD
Last revised : 14-Aug-2000

CROSS TIMBERS OPERATING CO.
UTE Indians "A" No.30, slot #1
, SAN JUAN COUNTY, NEW MEXICO

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S	Dogleg Deg/100ft	Vert Sect
0.00	0.00	0.00	0.00	0.00 N	0.00 E	0.00
100.00	0.35	358.93	100.00	0.31 N	0.01 W	-0.31
200.00	0.70	357.86	200.00	1.22 N	0.03 W	-1.22
300.00	1.05	356.79	299.98	2.75 N	0.11 W	-2.75
400.00	1.40	355.72	399.96	4.88 N	0.25 W	-4.88
500.00	1.75	354.65	499.92	7.62 N	0.48 W	-7.62
600.00	2.10	353.60	599.87	10.96 N	0.83 W	-10.96
671.00	2.20	354.60	670.82	13.61 N	1.10 W	-13.61
766.00	1.70	356.20	765.76	16.83 N	1.37 W	-16.83
857.00	1.50	354.50	856.72	19.36 N	1.57 W	-19.36
951.00	1.30	358.70	950.70	21.65 N	1.71 W	-21.65
1046.00	1.30	2.00	1045.67	23.81 N	1.70 W	-23.81
1140.00	1.30	16.40	1139.65	25.90 N	1.36 W	-25.90
1234.00	1.10	31.00	1233.63	27.69 N	0.60 W	-27.69
1296.00	3.20	154.40	1295.60	26.64 N	0.46 E	-26.64
1358.00	6.40	159.90	1357.37	21.83 N	2.39 E	-21.83
1388.00	7.40	160.00	1387.16	18.45 N	3.63 E	-18.45
1451.00	9.90	165.20	1449.43	9.40 N	6.40 E	-9.40
1512.00	10.80	183.50	1509.46	1.38 S	7.39 E	1.38
1575.00	10.80	185.20	1571.34	13.15 S	6.50 E	13.15
1637.00	11.10	181.00	1632.21	24.90 S	5.86 E	24.90
1698.00	11.40	178.50	1692.04	36.80 S	5.92 E	36.80
1758.00	11.30	183.70	1750.87	48.59 S	5.70 E	48.59
1820.00	11.30	185.00	1811.67	60.71 S	4.77 E	60.71
1882.00	11.10	184.00	1872.49	72.71 S	3.83 E	72.71

All data is in feet unless otherwise stated.

Coordinates from slot #1 and TVD from rotary table.

Bottom hole distance is 396.25 on azimuth 179.79 degrees from wellhead.

Vertical section is from wellhead on azimuth 180.00 degrees.

Calculation uses the minimum curvature method.

Presented by Baker Hughes INTEQ

SURVEY LISTING Page 2
Your ref : KND
Last revised : 14-Aug-2000

CROSS TIMBERS OPERATING CO.
UTE Indians "A" No.30, slot #1
, SAN JUAN COUNTY, NEW MEXICO

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S	Dogleg Deg/100ft	Vert Sect
1943.00	11.10	184.60	1932.35	84.42 S	0.19	84.42
2007.00	11.20	185.10	1995.14	96.75 S	0.22	96.75
2070.00	11.20	184.00	2056.94	108.95 S	0.34	108.95
2132.00	11.40	180.90	2117.74	121.08 S	1.03	121.08
2195.00	11.00	175.00	2179.54	133.30 S	1.93	133.30
2258.00	11.60	175.50	2241.32	145.60 S	0.96	145.60
2328.00	11.30	182.50	2309.93	159.47 S	2.03	159.47
2379.00	10.80	182.20	2359.98	169.23 S	0.99	169.23
2443.00	10.80	182.00	2422.85	181.22 S	0.06	181.22
2505.00	11.30	182.80	2483.70	193.09 S	0.84	193.09
2569.00	10.50	178.70	2546.55	205.18 S	1.74	205.13
2632.00	11.30	177.80	2608.41	217.09 S	1.30	217.03
2695.00	10.80	179.20	2670.24	229.16 S	0.90	229.16
2757.00	10.80	177.80	2731.14	240.77 S	0.42	240.77
2819.00	10.10	178.60	2792.11	252.01 S	1.15	252.01
2880.00	10.10	179.00	2852.17	262.71 S	0.11	262.71
2943.00	10.70	179.80	2914.13	274.08 S	0.98	274.08
3004.00	9.90	180.50	2974.15	284.99 S	1.33	284.99
3065.00	10.00	179.70	3034.23	295.53 S	0.28	295.53
3158.00	10.10	180.70	3125.80	311.76 S	0.22	311.76
3252.00	10.10	179.80	3218.35	328.24 S	0.17	328.24
3345.00	9.90	179.70	3309.94	344.39 S	0.22	344.39
3438.00	9.90	181.50	3401.55	360.37 S	0.33	360.37
3470.00	9.70	183.10	3433.08	365.82 S	1.06	365.82
3502.00	9.90	181.00	3464.62	371.26 S	1.28	371.26

All data is in feet unless otherwise stated.

Coordinates from slot #1 and TVD from rotary table.

Bottom hole distance is 396.25 on azimuth 179.79 degrees from wellhead.

Vertical section is from wellhead on azimuth 180.00 degrees.

Calculation uses the minimum curvature method.

Presented by Baker Hughes INTEQ

SURVEY LISTING Page 3
Your ref : MWD
Last revised : 14-Aug-2000

CROSS TIMBERS OPERATING CO.
UPE Indians "A" No.30, slot #1
, SAN JUAN COUNTY, NEW MEXICO

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S	Dogleg Deg/100ft	Vert Sect
3533.00	10.20	180.70	3495.14	376.67 S	1.53 E	0.98
3564.00	10.60	180.20	3525.63	382.26 S	1.48 E	1.32
3596.00	10.60	180.20	3557.09	388.15 S	1.46 E	0.00
3640.00	10.60	180.20	3600.33	396.24 S	1.43 E	0.00
						376.67
						382.26
						388.15
						396.24

All data is in feet unless otherwise stated.
Coordinates from slot #1 and TVD from rotary table.
Bottom hole distance is 396.25 on azimuth 179.79 degrees from wellhead.
Vertical section is from wellhead on azimuth 180.00 degrees.
Calculation uses the minimum curvature method.
Presented by Baker Hughes INTEQ