

3- 30045 08507.
400- 30-045-28909

3849

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

Operator Meridian Oil Inc. Location: Unit L Sec. 08 Twp 29 Rng 12

Name of Well/Wells or Pipeline Serviced _____

SHIOTANI Fed #400 AND Hudson #3

Elevation 5606 Completion Date 3-15-93 Total Depth 474 Land Type P

Casing Strings, Sizes, Types & Depths 3/7 SET 98' OF 8" PVC CASING.

NO GAS, WATER, OR BOULDERS WERE ENCOUNTERED DURING CASING.

If Casing Strings are cemented, show amounts & types used Cemented

WITH 19 SACKS.

If Cement or Bentonite Plugs have been placed, show depths & amounts used

No plugs

Depths & thickness of water zones with description of water: Fresh, Clear,
Salty, Sulphur, Etc. 180' and was clear.

Depths gas encountered: No gas

Ground bed depth with type & amount of coke breeze used: 474' with
147 (50 lb) sacks of Asbury Graphite

Depths anodes placed: #1 is at 460' and #15 is at 320'

Depths vent pipes placed: Bottom to Surface

Vent pipe perforations: up to 200'

Remarks: _____

RECEIVED

JAN 31 1994

OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

API WATER ANALYSIS REPORT FORM

Laboratory No. 25-930417-1C

Company Meridian Oil		Sample No.		Date Sampled	
Field 754 CD	Legal Description L8-29-10	County or Parish ST		State NM	
Lease or Unit	Well Shiokani	# 400	Depth	Formation Fruitland	Water, B/D
Type of Water (Produced, Supply, etc.)			Sampling Point Ground Bed		Sampled By R. Smith

DISSOLVED SOLIDS

OTHER PROPERTIES


CATIONS	mg/l	me/l	pH
Sodium, Na (calc.)	750	41	Specific Gravity, 60/60 F.
Calcium, Ca	469	23.4	Resistivity (ohm-meters) 71 F.
Magnesium, Mg	22	1.8	
Barium, Ba			

ANIONS

Chloride, Cl	330	23	Total Dissolved Solids (calc.)
Sulfate, SO_4	1900	40	4400
Carbonate, CO_3	-	-	Iron, Fe (total)
Bicarbonate, HCO_3	210	3.4	Sulfide, as H_2S

REMARKS & RECOMMENDATIONS:

ATTN: B Donahue

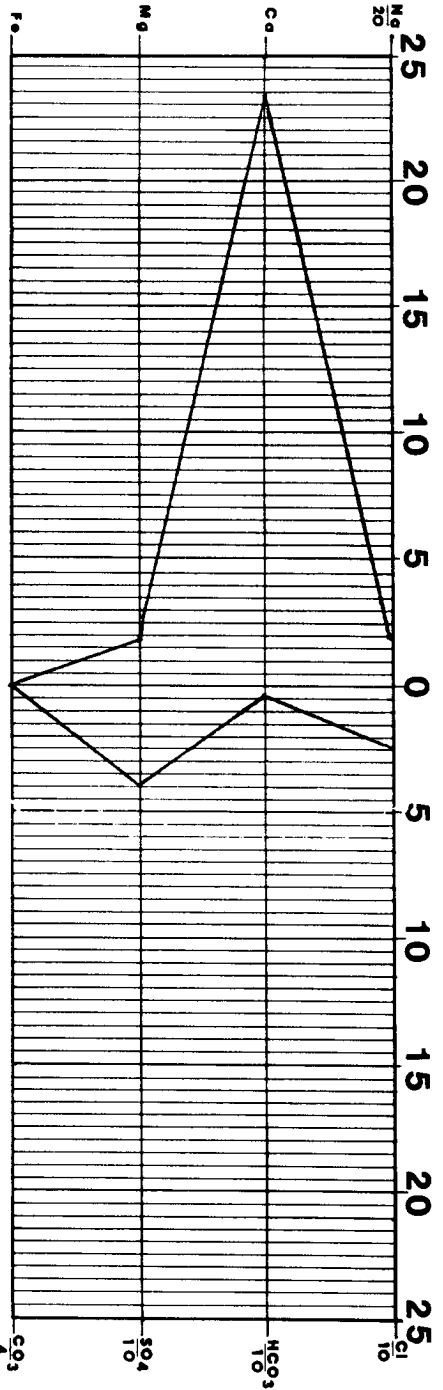

Date Received April 17th, 1993	Preserved	Date Analyzed April 2nd, 1993	Analyzed By R. H.
--	-----------	---	-----------------------------



TECH, Inc.
 333 East Main
 Farmington
 New Mexico
 87401
 505/327-3311