

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Rincon Unit Well #40
30-039-06907

Rincon Unit Well #172
30-039-06930

3278
Rincon Unit Well #84
30-039-06928

Operator: UNOCAL - Bloomfield, NM Location: Unit A Sec. 26 Twp. 27N Rng. 7W

Name of Well/Wells or Pipeline Served: RINCON UNIT WELLS: 84 MV; 40 PC; 172 DK

Elevation: 6745 DF Completion Date: 10/19/95 Total Depth: 300' Land Type* F

Casing, Sizes, Types & Depths: NONE

If Casing is cemented, show amounts & types used: NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used: NONE

Depths & thickness of water zones with description of water when possible: WET SANDSTONE AT 1.

Fresh, Clear, Salty, Sulfur, Etc.: NONE

Depths gas encountered: NONE

Type & amount of coke breeze used: 2500 LBS., SWB METALURGICAL PETROLEUM COKE

Depths anodes placed: 175' 185' 195' 205' 215' 225' 235' 265' 275' 285'

Depths vent pipes placed: 0' - 300', 1" PVC

Vent pipe perforations: 1/8" PERFORATIONS FROM 100' TO 300'


Remarks: SECOND GROUND BED INSTALLED ON THIS LOCATION.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analysis & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee
If Federal or Indian, add Lease Number.

RECEIVED
FEB - 5 1996

OIL CON. DIV.
DIST. 3

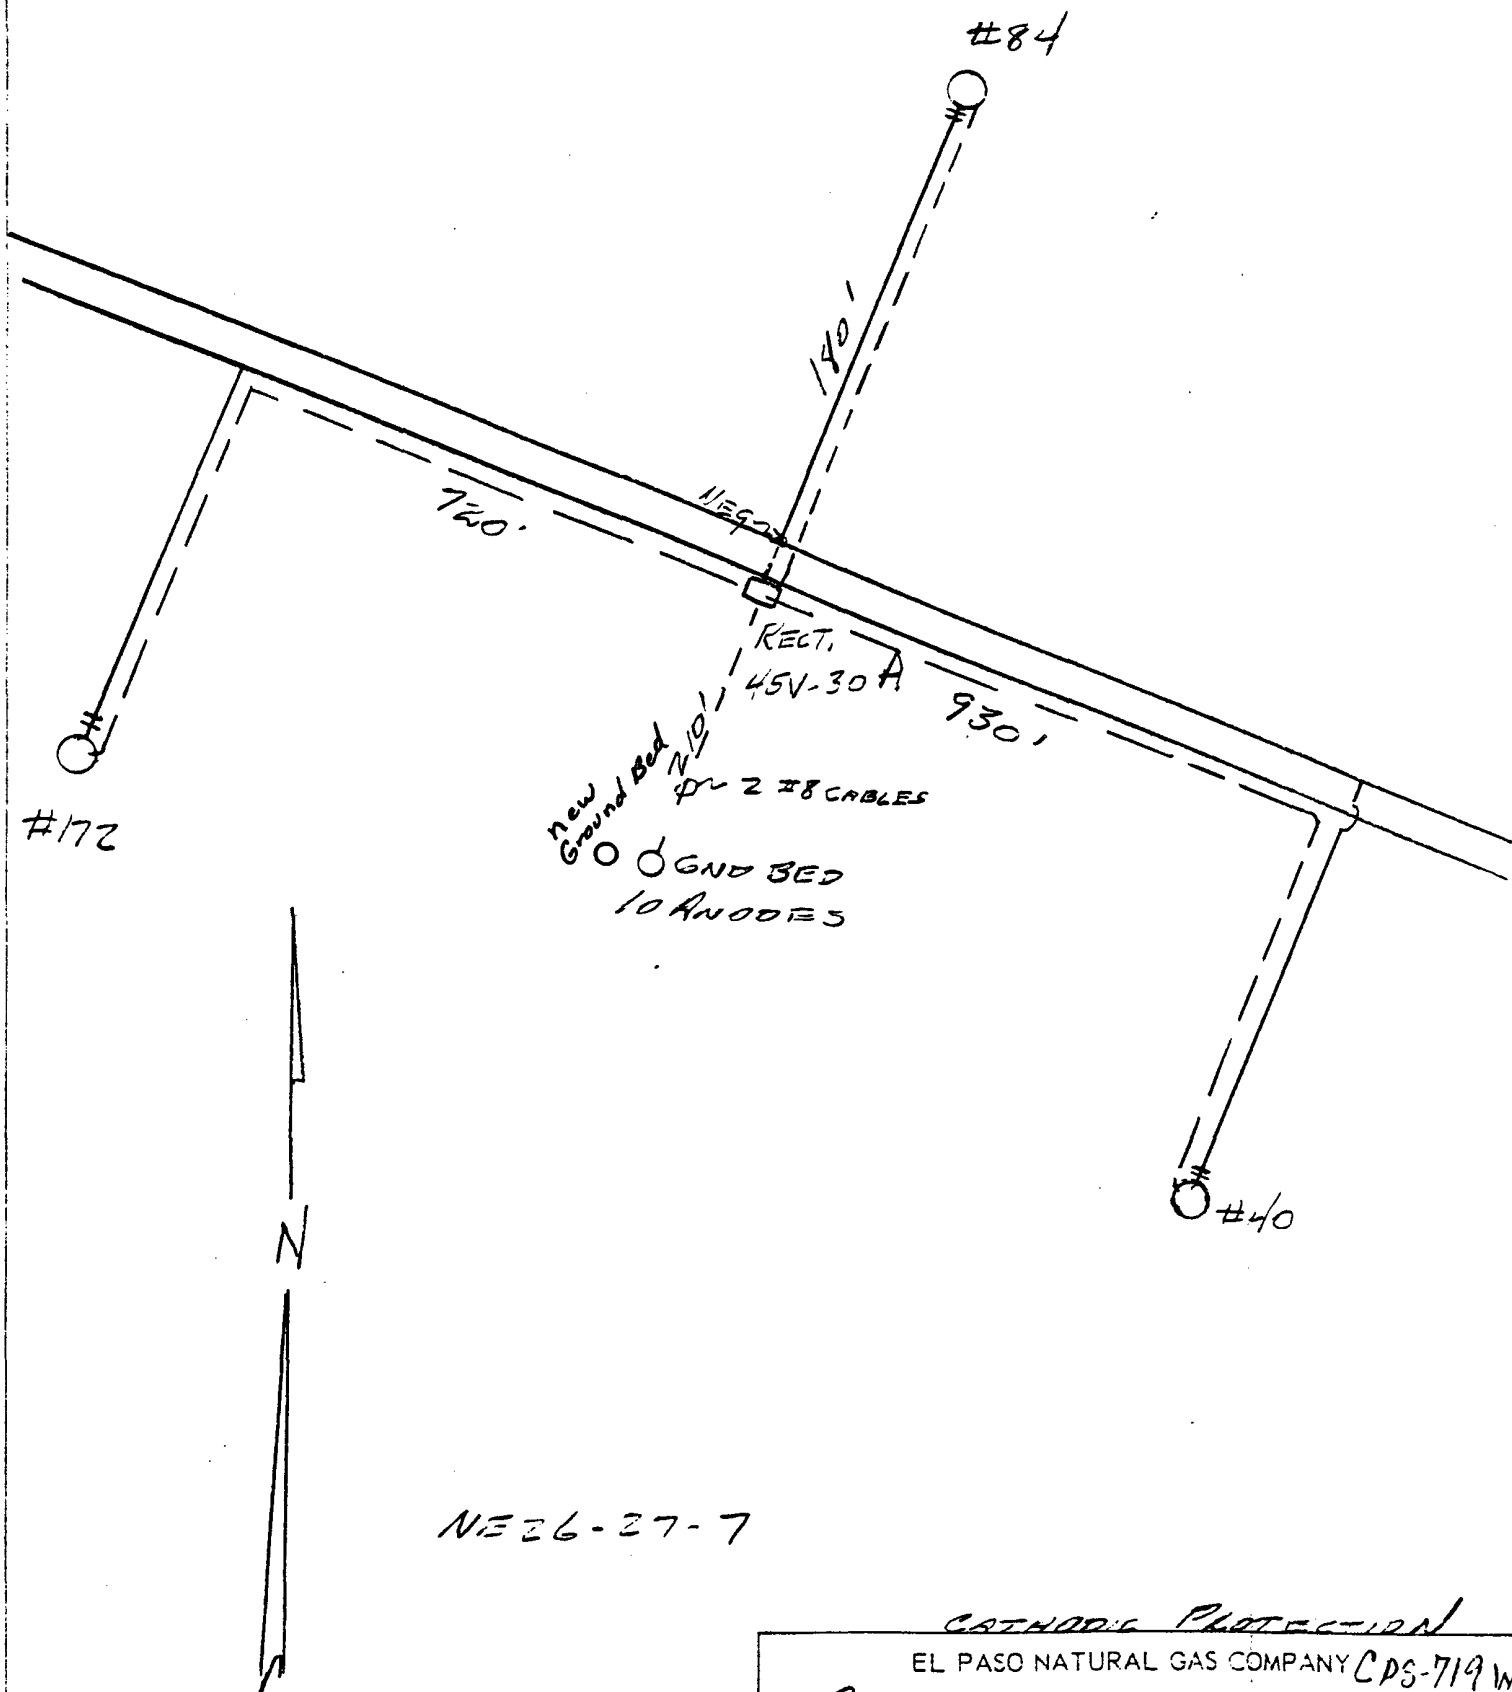

NE 26-27-7

CATHODIC PROTECTION

EL PASO NATURAL GAS COMPANY CPS-719W

Rincon #40 - #84 & #172

SCALE None

DATE 5-25-65

No.

DRAWN BY

gcm

CHECKED BY

#36

COMPANY: Unocal DATE: 10-19-95
 WELL: Kinson Unit 84, 172, 40 PIPELINE:
 LOCATION: 1A 1A SEC. 26-27-7 STATE: N.M.
 GROUND BED: DEPTH: 300' DIAMETER: 6 3/4" BACKFILL: Metallurgical ANODES TYPE: Dunsmuir 51

DEPTH FT.	DRILLERS LOG	ANODE LOG			ANODE DEPTH	REMARKS
		I Logged	I Coded	R		
20	Shale					
30	Shale					
40	Shale					
50	Sand Stone					
60	Sand Stone					
70	Sand Stone					
80	Sand Stone					
90	Shale					
100	Shale					
110	Shale					
120	Sand Stone					
130	Sand Stone					
140	Sand Stone	.3				Wet sand
150	Sand Stone	.2				
160	Sand Stone	.2				
170	Shale	1.6	2.8		175'	
180	Shale	1.4	3.1		185'	
190	Sandy Shale	.9	1.9		195'	
200	Shale	1.3	3.0		205'	
210	Shale	1.7	3.7		215'	
220	Shale	1.3	2.8		225'	
230	Shale	1.3	2.9		235'	
240	Sandy Shale	.8				
250	Sandy Shale	.6				
260	Shale	1.3	2.5		265'	
270	Shale	1.3	2.8		275'	
280	Shale	1.8	2.4		285'	
290	Sand Stone	.3				
300	Sand Stone	.3				
310						
320						
330						
340						
350						

NOTES:

POWER SOURCE: Battery VOLTS: 9.25
 INDICATE WATER ZONE DEPTHS Wet Sand Stone 140'
 CASING RUN: YES / ☒ NO TYPE: _____ DEPTH: _____ CEMENTED: YES / ☒ NO
 ISOLATION PLUGS SET: YES / ☒ NO IF SO, WHERE: _____
 TOTAL: AMPS 9.4 RESISTANCE: 1.101

