

E

812

24-30-045-06030

40-30-045-06015

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 4 Twp 26 Rng 9

Name of Well/Wells or Pipeline Serviced HUERFANITO UNIT #60, #24

cps 1015w

Elevation 6401' Completion Date 8/18/75 Total Depth 400' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 240'

Depths gas encountered: N/A

Type & amount of coke breeze used: 3100 lbs.

Depths anodes placed: 350', 340', 330', 320', 310', 300', 290', 280', 255', 245'

Depths vent pipes placed: N/A

Vent pipe perforations: 200'

Remarks: gb #1

RECEIVED
MAY 31 1991
CON. EN.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

haff
Completion Date **8-18-75**

Drilling Log (Attach Hereto). ☐

Well Name Huerfano # 60 Huerfano # 24		Location SW 4 - 26N - 9W		CPS No. 1015W	
Type & Size Bit Used 6 3/4"				Work Order 90990.19-50-20 90816.19-50-20	
Anode Hole Depth 400	Total Drilling Rig Time	Total Lbs. Coke Used 3,100	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 350	# 2 340	# 3 330	# 4 320	# 5 310	# 6 300
# 7 290	# 8 280	# 9 255	# 10 245		
Anode Output (Amps)					
# 1 3.2	# 2 3.6	# 3 4.2	# 4 4.0	# 5 4.2	# 6 4.2
# 7 4.0	# 8 3.8	# 9 3.6	# 10 3.4		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance					
Volts 11.6	Amps 11.6	Ohms 1.0		No. 8 C.P. Cable Used 3110	No. 2 C.P. Cable Used


Remarks: **Drill With Air Driller said water**
AT 240' VENT HOSE PERFORATED 200'
Logging Anode STOPPED AT 373'

Drill - 1163.76
Wate - 417.56
Imp - 213.40
Wave - 289.23
Coke - 186.00
Anodes - 244.60
J Box - 86.00
Rest - 333.50
Vent - 23.00
Man - 50.00

All Construction Completed

Edward P. Parker
(Signature)

GROUND BED LAYOUT SKETCH

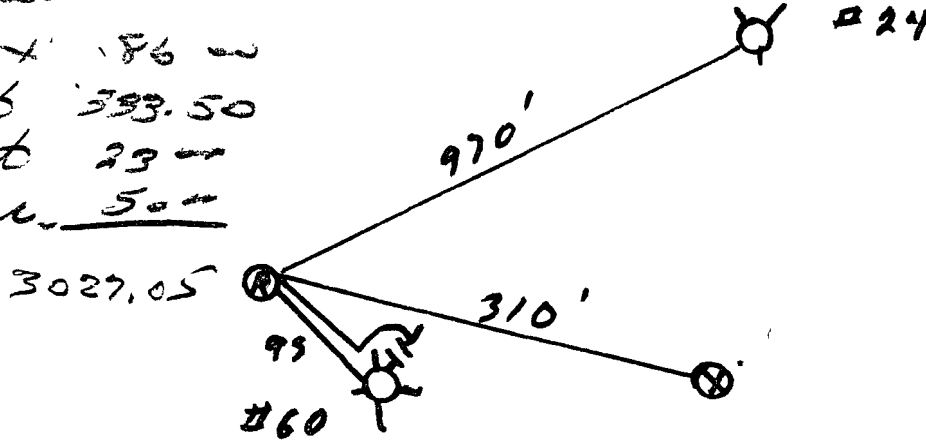

1119

6401



Ph. Office 405/584-6000
Mobile 584-6860
Night 420-3248

Work Order No. 92990-1940-20
92990-1940-20

CUSTOMER: <i>El Paso Gas Co</i>		SERVICE ADDRESS <i>Box 440 - ZCP 87401</i>		CITY <i>Flamingo, N.M.</i>	
TEL. NO. <i>Box 101510</i>	REQ. NO.	SERVICEMAN <i>J. Macgovern</i>	VEHICLE NO. <i>14</i>	DATE COMPLETED	

[illegible]

Date started _____, 19____
Date completed _____, 19____

[The following section contains several horizontal black bars redacting information.]

TOTAL DEPTH 373

RIG TIME

WATER TRUCK

DRILLERS CERTIFICATION

This well was drilled under my supervision and the report is true to the best of my knowledge.

Name Ch. Gibson

Address

Well driller's license number

Signed

Date _____

Customer's Signature

Bv

