

DAYA #1 30-045-23741
DAY A #14 30-045-20907 4606

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator TENNECO Location: Unit NE Sec. 17 Twp 29 Rng 8
Name of Well/Wells or Pipeline Serviced DAY A #1, DAY A #14
cps 81w
Elevation 6454' Completion Date 11/26/62 Total Depth 140' Land Type* N/A
Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types used N/A
If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A
Depths & thickness of water zones with description of water when possible
Fresh, Clear, Salty, Sulphur, Etc. N/A
Depths gas encountered: N/A
Type & amount of coke breeze used: 1020 lbs.
Depths anodes placed: 110', 104', 98', 92', 48', 42', 36', 30'
Depths vent pipes placed: N/A
Vent pipe perforations: N/A
Remarks: qgb #1 not a MERIDIAN well!

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

4 qgb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 11-26-62

WELL NAME Day #1-A CPS NO. 81W

LOCATION 17-29N-8W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 140'

TOTAL LABOR 6 hrs
TOTAL DRILLING RIG TIME 7 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 110, #2 104, #3 98, #4 92 5.48 6.42 7.36 8.2

TOTAL LBS. COKE USED 1020 lbs (12 sacks)

ANODE OUTPUTS 12.5 VOLTS, #1 1.6A, #2 2.3, #3 3.1, #4 2.9 5.30 6.44
7.34 8.34A

TOTAL CIRCUIT RESISTANCE: VOLTS 11.6 AMPERES 9 OHMS 1.28

NUMBER FEET SURFACE CABLE CONDUIT 405' 1165'

DRILLING LOG (ATTACH HERETO).


FORMATION LOG (ATTACH HERETO).

REMARKS: Installed 8 Anodes offset well started
out to be drilled
Static C/S = .71R 600' south

ALL CONSTRUCTION COMPLETED

E. R. Paulk
SIGNATURE

GROUND BED LAYOUT SKETCH

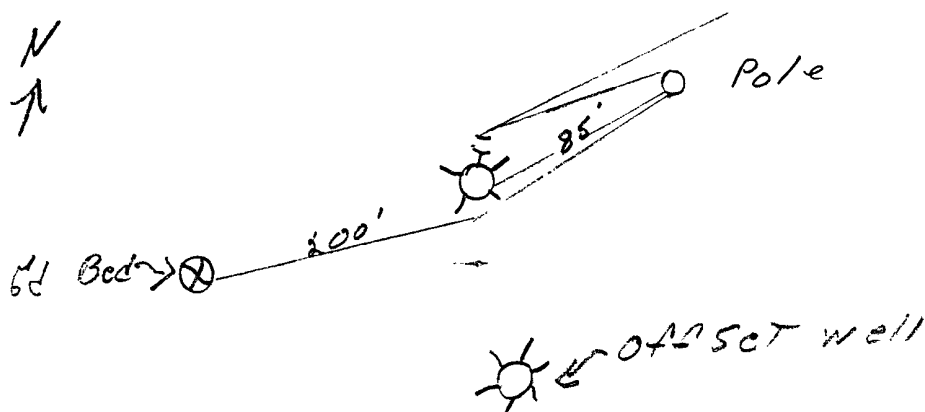

ORIGINAL & 1 COPY
ALL REPORTS

[illegible]