

4821

30-039-07685

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 3 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #83

cps 129w

Elevation 6822' Completion Date 9/7/84 Total Depth 600' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 6000 lbs.

Depths anodes placed: 555', 545', 535', 525', 515', 505', 495', 485', 475', 465'

Depths vent pipes placed: 575' OF 1" PVC VENT PIPE

Vent pipe perforations: 270'

Remarks: qb #3

RECEIVED

MAY 31 1991

OIL CON. DIV

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 3-27-63

WELL NAME Daum # 3-A

CPS NO. 129W

LOCATION NE² Sec. 3 T29N R7W

WORK ORDER NUMBER 184- 60542-50-02

ANODE HOLE DEPTH 120'

TOTAL DRILLING RIG TIME 12 Hrs.

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 6 1/4 Rock W.M. (3502) & (1541)
50' 70'

NUMBER SACKS MUD USED 11

NUMBER SACKS LOST CIRCULATION MAT'L USED 5

ANODE DEPTHS #1 105, #2 99, #3 93, #4 87 #5 81'

TOTAL LBS. COKE USED 850# 10 SACKS

ANODE OUTPUTS 12.4 VOLTS, #1 2.8, #2 3.2, #3 3.3, #4 3.3 #5 2.3

TOTAL CIRCUIT RESISTANCE: VOLTS 11.9 AMPERES 7.2 OHMS 1.65

NUMBER FEET SURFACE CABLE ~~CONDUIT~~ 400'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static g/s: .67 R 600 South


Installed Good-Hill Rectifier 2AV12A

Serial No. 62C6207 Assigned Tag # 129W

ALL CONSTRUCTION COMPLETED

Sorels
SIGNATURE

GROUND BED LAYOUT SKETCH

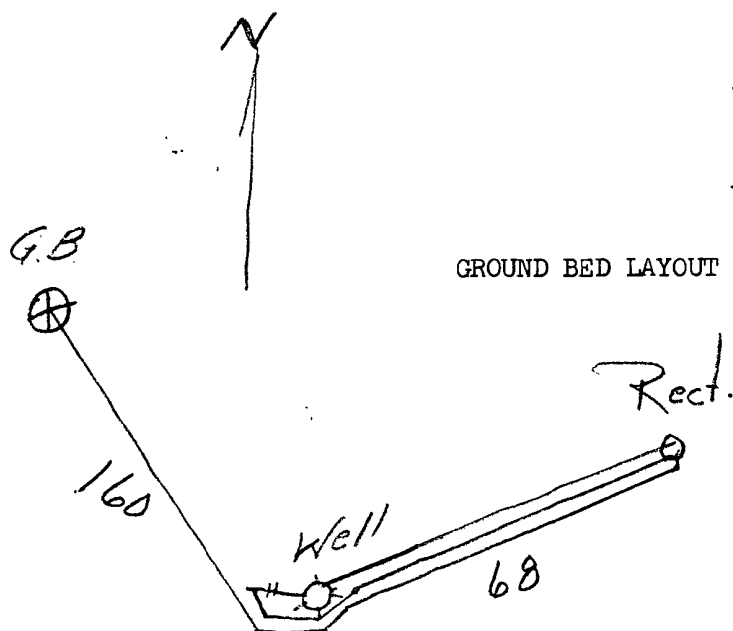

ORIGINAL & 1 COPY
ALL REPORTS

964'

EL PASO NATURAL GAS COMPANY

DRILLING DEPARTMENT

DAILY DRILLING REPORT

LEASE Sec 2-29N-R7W WELL NO. DRUM No 3-F CONTRACTOR L E Wilson RIG NO. D-6 REPORT NO. 1 DATE MARCH 27-28 19

MORNING

DAYLIGHT

EVENING

Driller					Total Men In Crew					Driller					Total Men In Crew					Driller					Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
0	50	SS Sand & Bl. sh	3502																										
50	120	Shale	1541																										

BIT NO.				NO. DC				SIZE				LENG.				BIT NO.				NO. DC				SIZE				LENG.			
SERIAL NO.				STANDS				SINGLES				DOWN ON KELLY				SERIAL NO.				STANDS				SINGLES				DOWN ON KELLY			
3502-1541				3																											
SIZE				TYPE				MAKE				TOTAL DEPTH				TYPE				MAKE				TOTAL DEPTH				TYPE			
Rock				Walker MAC				120																							

MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.

FROM		TO		TIME BREAKDOWN		FROM		TO		TIME BREAKDOWN		FROM		TO		TIME BREAKDOWN	

REMARKS -		REMARKS -		REMARKS -	
MARCH 27-DRILLED 100' went Blind at 112' used 11 mud 5 HULLS 3 1/2 WATER 10 HRS		MARCH 28-DRILLED 20' THINED DOWN 2 HRS		moving to new location	

SIGNED: Toolpusher

Company Supervisor