

30-045-10343

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator TENNECO Location: Unit NE Sec. 27 Twp 31 Rng 9

Name of Well/Wells or Pipeline Serviced SCHWERTFEGER #2

cps 344w

Elevation 6218' Completion Date 6/14/63 Total Depth 270' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 2200 lbs.

Depths anodes placed: 245', 239', 233', 227', 221'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1 not a MERIDIAN well.

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 6-14-63

WELL NAME Schwerdt-eger No. 2 CPS NO. 344-W

LOCATION NE 27-31-9

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 270

TOTAL DRILLING RIG TIME 11 1/2 Hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 6 1/4 Rock W.D. 3489, 3510
216 54

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 245, #2 239, #3 233, #4 227 5 221

TOTAL LBS. COKE USED 2200 22 sacks

ANODE OUTPUTS 12.4 VOLTS, #1 3.7, #2 3.4, #3 3.6, #4 4.0 5 3.9

TOTAL CIRCUIT RESISTANCE: VOLTS 11.7 AMPERES 8.2 OHMS 1.425

NUMBER FEET SURFACE CABLE ~~CONDUIT~~ 606'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).


REMARKS: Static $\gamma_s = 80 \text{ R. } 600' \text{ S}$

Good 211 Rectifier 28 V 12 A Ser. # 62 C 6126

ALL CONSTRUCTION COMPLETED

Dorrells
SIGNATURE

GROUND BED LAYOUT SKETCH

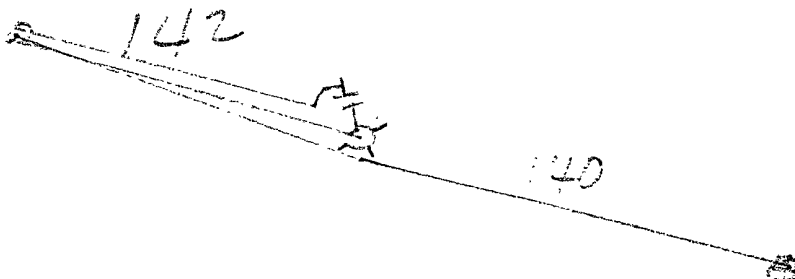

ORIGINAL & 1 COPY
ALL REPORTS

866'

2444

DAILY DRILLING REPORT

SCHWENKHOFFER No. 2

LEASE 8827 F300 1900 ELL NO.

CONTRACTOR

W. E. Wilson

RIG NO. P-6

REPORT NO.

DATE June 13 & 14 1943

MORNING

DAYLIGHT

EVENING

Driller				Total Man In Crew				Driller				Total Man In Crew			
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	
0	105	4 1/2 55			105	216	5 1/2 55								
105	216	5 1/2 55			216	270	5 1/2 55								
216	270	5 1/2 55			270										
270															
BIT NO.		NO. DC	SIZE	LENG.	BIT NO.		NO. DC	SIZE	LENG.	BIT NO.		NO. DC	SIZE	LENG.	
SERIAL NO.		STANDS			SERIAL NO.		STANDS			SERIAL NO.		STANDS			
SIZE		SINGLES			SIZE		SINGLES			SIZE		SINGLES			
TYPE		DOWN ON KELLY			TYPE		DOWN ON KELLY			TYPE		DOWN ON KELLY			
MAKE		TOTAL DEPTH			MAKE		TOTAL DEPTH			MAKE		TOTAL DEPTH			
MUD RECORD		MUD, ADDITIVES USED AND RECEIVED			MUD RECORD		MUD, ADDITIVES USED AND RECEIVED			MUD RECORD		MUD, ADDITIVES USED AND RECEIVED			
Time	Wt.	Vis.			Time	Wt.	Vis.			Time	Wt.	Vis.			
FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			

4 good water mud

Total Rig Time 11 1/2 hrs

REMARKS - June 13 - Moved 10:30 AM. Drilled 240' used 1 mud 2 muds. Drilled 5:00 PM. June 14 - Left from field 6:00 AM. Drilled 60' finished 10:30 AM.

SIGNED: Toolpusher

Company Supervisor

W. E. Wilson