

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

30-039-21397

OPERATOR: Williams Production Company LOCATION: C 25 31 5 LEASE NUMBER: SF-078768

NAME OF WELL/WELLS OR PIPELINE SERVICED: ROSA UNIT #062 DK
DUALWELL N/A

ELEVATION: 6606' GR COMPLETION DATE: 10/22/87 TOTAL DEPTH: 500 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG---Top:N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 150' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A'

COKE: 7830 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10-D TOP ANODE @ 260 ft. BOTTOM ANODE @ 485 ft.

VENT PIPE: 1" PVC Set @ 500 ft. Vent pipe perforated from 240 ft. to 500 ft.

REMARKS: _____

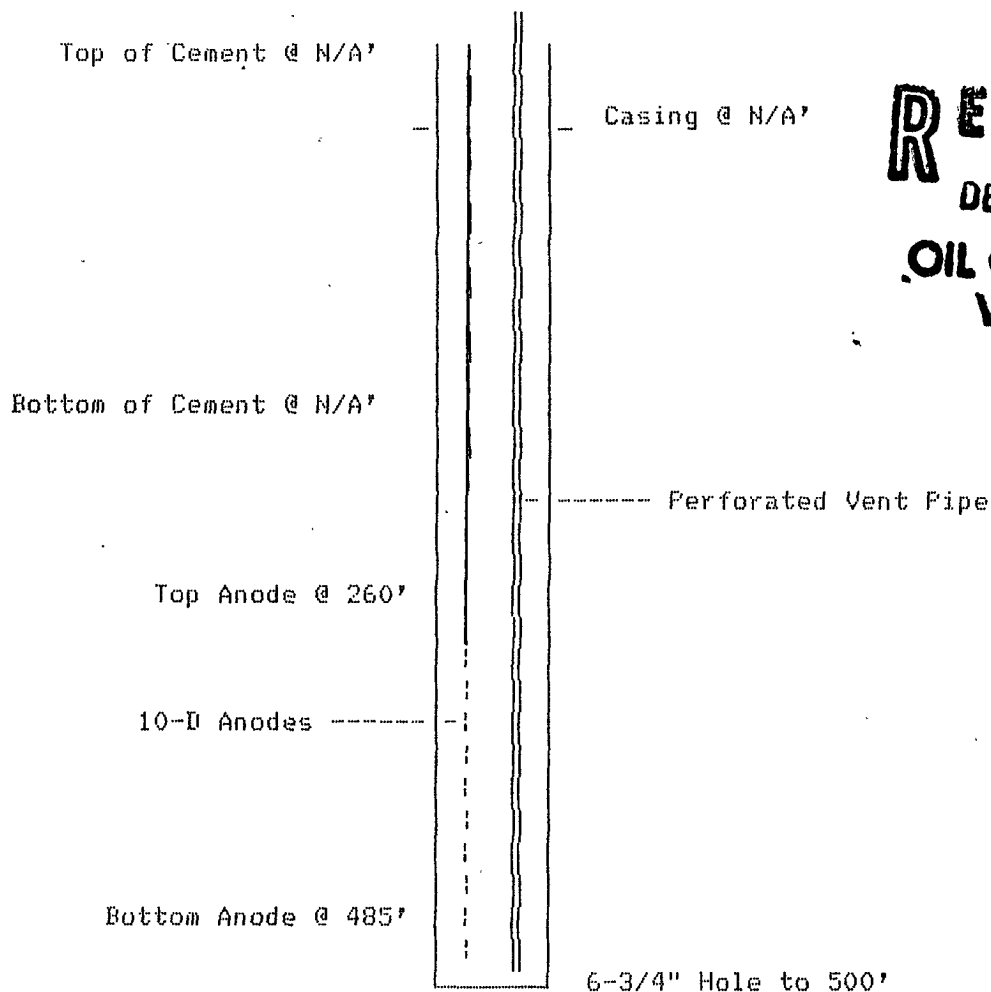

RECEIVED
DEC 11 1991
OIL CON. DIV.
DIST. 3

LOCATION Rosa #62DATE 8-12-87

10	130	250 <u>1.46</u>	370 <u>1.19</u>	490 <u>1.26</u>
15	135	255 <u>1.62</u>	375 <u>1.42</u> 6	495 <u>1.24</u>
20	140	260 <u>1.59</u> 10	380 <u>1.18</u>	500 <u>1.24</u>
25	145	265 <u>1.42</u>	385 <u>1.13</u>	505
30	150	270 <u>1.34</u>	390 <u>1.08</u>	510
35	155	275 <u>1.11</u>	395 <u>1.19</u>	
40	160 <u>1.34</u>	280 <u>1.02</u>	400 <u>1.15</u>	Total Amps <u>11.3</u>
45	165 <u>1.34</u>	285 <u>.94</u>	405 <u>1.34</u> 5	Total Volts <u>10.9</u>
50	170 <u>1.30</u>	290 <u>.96</u>	410 <u>1.29</u>	Total Res. <u>.66</u>
55	175 <u>1.18</u>	295 <u>1.07</u>	415 <u>1.18</u>	
60	180 <u>1.19</u>	300 <u>1.17</u>	420 <u>1.06</u>	
65	185 <u>.92</u>	305 <u>1.26</u>	425 <u>1.18</u>	
70	190 <u>1.16</u>	310 <u>1.39</u> 9	430 <u>1.28</u>	
75	195 <u>1.20</u>	315 <u>1.31</u>	435 <u>1.06</u>	
80	200 <u>1.35</u>	320 <u>1.08</u>	440 <u>1.35</u> 4	
85	205 <u>1.20</u>	325 <u>1.27</u>	445 <u>1.40</u>	
90	210 <u>1.48</u>	330 <u>1.30</u>	450 <u>1.55</u> 3	
95	215 <u>1.56</u>	335 <u>1.40</u> 8	455 <u>1.08</u>	
100	220 <u>1.53</u>	340 <u>1.32</u>	460 <u>.96</u>	
105	225 <u>1.24</u>	345 <u>1.25</u>	465 <u>1.05</u>	
110	230 <u>1.07</u>	350 <u>1.23</u>	470 <u>1.22</u>	
115	235 <u>1.28</u>	355 <u>1.44</u> 2	475 <u>1.39</u>	
120	240 <u>1.58</u>	360 <u>1.21</u>	480 <u>1.30</u>	
125	245 <u>1.58</u>	365 <u>1.20</u>	485 <u>1.41</u> 1	