

submitted in lieu of Form 3160-5
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

RECEIVED

DEC 03 2007

1. Type of Well
GAS

Bureau of Land Management
Farmington Field Office

5. Lease Number
NMNM-012694
6. If Indian, All. or
Tribe Name
7. Unit Agreement Name
San Juan 30-6 Unit
8. Well Name & Number
San Juan 30-6 Unit 465S
9. API Well No.
30-039-30205
10. Field and Pool
Basin Fruitland Coal
11. County and State
Rio Arriba Co., NM

2. Name of Operator
CONOCOPHILLIPS

3. Address & Phone No. of Operator

PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M

Sur: Unit J (NWSE), 2480' FSL & 2250' FEL, Section 15, T30N, R07W, NMPM
Bot: Unit B (NWNE), 1002' FNL & 1328' FEL, Section 15, T30N, R07W, NMPM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

Type of Action

☐ Notice of Intent ☐ Abandonment ☐ Change of Plans
☒ Subsequent Report ☐ Recompletion ☐ New Construction
☐ Final Abandonment ☐ Plugging ☐ Non-Routine Fracturing
☐ ☐ Casing Repair ☐ Water Shut off
☐ ☐ Altering Casing ☐ Conversion to Injection

☒ Other - Completion Detail

13. Describe Proposed or Completed Operations

10/26/07 MIRU AWS 266. ND WH, NU BOP. 10/27/07 PT csg to 1500psi for 30mins-good test. Tag cmt @ 3566'. (7" shoe @ 3662') RU power swivel & DO cmt f/3566' to 3662'. RIH w/6 1/4" bit & drill ahead to new TMD 4015' (TVD 3188'). TD reached 10/31/07. 11/1/07 RIH w/ 9 1/2" underreamer & underream 6 1/4" hole to 9 1/2". Circ hole & CO to TD.

11/7/07 RIH w/10jts 5 1/2" 15.5# K-55 liner & set @ 4015'. TOL @ 3645'. 17' overlap on 7" shoe. Perfs @ 3697'-3764', 3806'-3867' & 3887'-3930' = 171' w/2 HPF = 342 holes.

11/9/07 RIH w/125jts 2 3/8" 4.7# J-55 tbg & set @ 3958'. ND BOP, NU WH. RIH w/pump & rods, spaced out. PT pump to 500#-ok. Flowtest w/pitot. RD RR @ 18:00hr on 11/9/07

11/29/07 Well is in the Fruitland Coal PA, bottom hole survey to be ran after winter closure. Estimated C-102 attached, corrected 'as drilled plat' to be filed after survey ran in the spring. Verbal approval from Charlie Perrin (OCD) and Wayne Townsend (BLM).

14. I hereby certify that the foregoing is true and correct.

Signed Tamra Sessions Tamra Sessions Title Regulatory Technician Date 11/29/2007


(This space for Federal or State Office use)


APPROVED BY _____ Title _____ Date _____

CONDITION OF APPROVAL, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

NMOCD



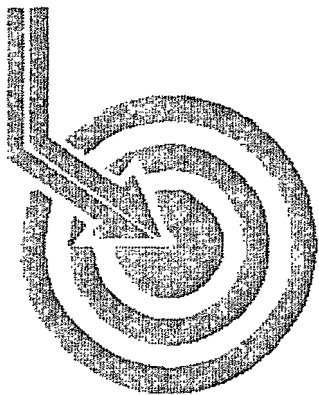

Scientific Drilling


CONOCOPHILLIPS

Field: San Juan
Site: Rio Arriba County, NM
Well: San Juan 30-6 #465S
Wellpath: DH - Job #33D0507420
Survey: 05/22/07-05/29/07


RCVD DEC 6 '07
OIL CONS. DIV.


DIST. 3

This survey is correct to the best of my knowledge
and is supported by actual field data.


.....Company Representative

Notorized this date 23rd of July, 2007.

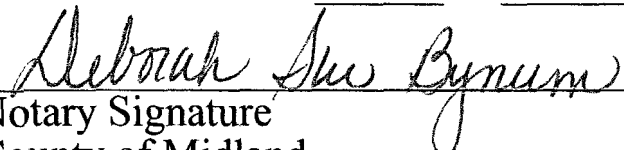
Notary Signature
County of Midland
State of Texas

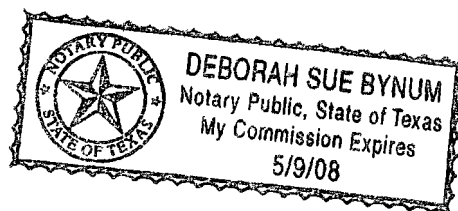



Scientific
Drilling

Scientific Drilling International Survey Report

Company: CONOCOPHILLIPS
Field: San Juan
Site: Rio Arriba County, NM
Well: San Juan 30-6 #465S
Wellpath: DH - Job #33D0507420

Date: 07/22/2007 Time: 20:34:15 Page: 1
Co-ordinate(NE) Reference: Site: Rio Arriba County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,26.96Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: 05/22/07-05/29/07
E-field 0'-3630' w/projection @ 3672'

Start Date: 05/22/2007

Company: Scientific Drilling Internatio
Tool: E-field;E-field MWD

Engineer: Drake/Stevesn/Sharpe/Jimenez/W
Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
293.00	2.59	33.03	292.90	6.58	5.55	3.61	0.88	6.62	33.03
355.00	4.97	26.70	354.76	10.66	9.13	5.58	3.89	10.70	31.44
415.00	7.89	27.52	414.38	17.38	15.10	8.65	4.87	17.40	29.81
476.00	11.33	25.14	474.51	27.56	24.24	13.13	5.68	27.57	28.45
538.00	14.44	22.44	534.94	41.36	36.90	18.67	5.11	41.36	26.84
598.00	17.49	23.56	592.62	57.82	52.09	25.13	5.11	57.83	25.76
660.00	19.94	26.76	651.34	77.70	70.07	33.62	4.28	77.72	25.63
721.00	22.86	27.17	708.13	99.95	89.90	43.71	4.79	99.97	25.93
782.00	25.62	26.29	763.75	124.99	112.27	54.97	4.56	125.01	26.09
844.00	28.56	25.74	818.94	153.22	137.64	67.34	4.76	153.24	26.07
908.00	31.57	25.74	874.32	185.27	166.52	81.27	4.70	185.30	26.01
969.00	34.41	26.09	925.48	218.47	196.39	95.79	4.67	218.51	26.00
1031.00	37.48	26.28	975.67	254.86	229.05	111.85	4.95	254.90	26.03
1093.00	40.62	27.50	1023.81	293.92	263.87	129.52	5.21	293.94	26.14
1155.00	43.25	29.08	1069.93	335.33	300.34	149.17	4.57	335.35	26.41
1217.00	45.81	28.77	1114.13	378.78	338.40	170.19	4.14	378.79	26.70
1280.00	47.75	29.86	1157.27	424.65	378.42	192.68	3.33	424.65	26.98
1344.00	49.29	29.94	1199.66	472.53	419.99	216.58	2.41	472.54	27.28
1407.00	50.99	29.56	1240.04	520.83	461.97	240.57	2.74	520.86	27.51
1471.00	52.23	28.40	1279.78	570.96	505.85	264.87	2.40	571.00	27.64
1534.00	52.93	27.24	1318.06	620.99	550.10	288.22	1.84	621.03	27.65
1598.00	53.66	26.02	1356.32	672.30	595.97	311.21	1.91	672.34	27.57
1659.00	53.83	26.12	1392.39	721.48	640.16	332.83	0.31	721.51	27.47
1722.00	54.58	25.91	1429.24	772.57	686.08	355.24	1.22	772.59	27.37
1784.00	54.94	26.58	1465.01	823.21	731.50	377.64	1.06	823.22	27.31
1847.00	55.29	26.49	1501.04	874.88	777.73	400.72	0.57	874.90	27.26
1910.00	55.24	27.10	1536.94	926.66	823.94	424.06	0.80	926.67	27.23
1973.00	55.47	27.63	1572.76	978.49	869.97	447.89	0.78	978.50	27.24
2034.00	54.95	27.24	1607.56	1028.58	914.44	470.97	1.00	1028.59	27.25
2096.00	54.20	26.69	1643.50	1079.10	959.46	493.88	1.41	1079.11	27.24
2160.00	53.68	26.32	1681.17	1130.84	1005.76	516.97	0.94	1130.85	27.20
2223.00	53.49	26.69	1718.57	1181.53	1051.13	539.59	0.56	1181.54	27.17
2286.00	53.54	27.04	1756.03	1232.19	1096.32	562.48	0.45	1232.19	27.16
2410.00	54.30	27.85	1829.05	1332.40	1185.25	608.67	0.81	1332.41	27.18
2463.00	53.44	27.71	1860.30	1375.20	1223.13	628.63	1.64	1375.21	27.20
2529.00	52.14	27.86	1900.22	1427.76	1269.63	653.13	1.98	1427.77	27.22
2593.00	50.89	27.31	1940.04	1477.85	1314.03	676.33	2.07	1477.87	27.23
2656.00	48.84	26.41	1980.65	1526.01	1356.99	698.09	3.43	1526.03	27.22
2718.00	46.29	26.57	2022.48	1571.76	1397.94	718.50	4.12	1571.78	27.20
2781.00	44.10	25.92	2066.88	1616.46	1438.03	738.27	3.55	1616.47	27.18
2846.00	42.21	25.52	2114.29	1660.90	1478.08	757.56	2.94	1660.91	27.14
2910.00	39.98	25.87	2162.52	1702.96	1515.99	775.80	3.50	1702.96	27.10
2971.00	38.28	25.50	2209.84	1741.44	1550.68	792.49	2.81	1741.45	27.07
3034.00	35.62	26.33	2260.18	1779.30	1584.74	809.03	4.30	1779.30	27.04
3097.00	32.52	27.56	2312.36	1814.59	1616.20	825.00	5.04	1814.59	27.04
3158.00	30.06	27.59	2364.48	1846.27	1644.28	839.67	4.03	1846.27	27.05
3220.00	27.87	27.43	2418.73	1876.29	1670.91	853.54	3.53	1876.29	27.06
3285.00	25.40	28.04	2476.82	1905.42	1696.70	867.09	3.82	1905.43	27.07



Scientific
Drilling

Scientific Drilling International


Survey Report

Company: CONOCOPHILLIPS
Field: San Juan
Site: Rio Arriba County, NM
Well: San Juan 30-6 #465S
Wellpath: DH - Job #33D0507420

Date: 07/22/2007 Time: 20:34:15 Page: 2
Co-ordinate(NE) Reference: Site: Rio Arriba County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,26.96Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase


Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
3349.00	23.07	28.71	2535.18	1931.68	1719.82	879.57	3.67	1931.69	27.09
3412.00	20.10	28.90	2593.75	1954.85	1740.13	890.73	4.72	1954.85	27.11
3475.00	17.43	27.94	2653.40	1975.10	1757.94	900.39	4.27	1975.11	27.12
3540.00	14.95	26.79	2715.82	1993.22	1774.03	908.73	3.85	1993.23	27.12
3601.00	12.11	29.19	2775.12	2007.49	1786.64	915.40	4.74	2007.50	27.13
3630.00	10.56	30.60	2803.55	2013.18	1791.59	918.23	5.43	2013.19	27.14
3672.00	8.32	32.64	2844.98	2020.05	1797.46	921.83	5.39	2020.06	27.15




Scientific
Drilling

Field: San Juan
Site: Rio Arriba County, NM
Well: San Juan 30-6 #465S
Wellpath: DH - Job #33D0507420
Survey: 05/22/07-05/29/07

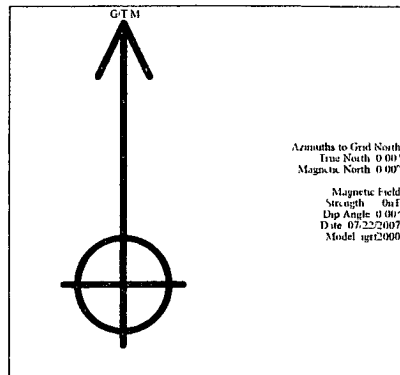

South(-)/North(+) [500ft/in]

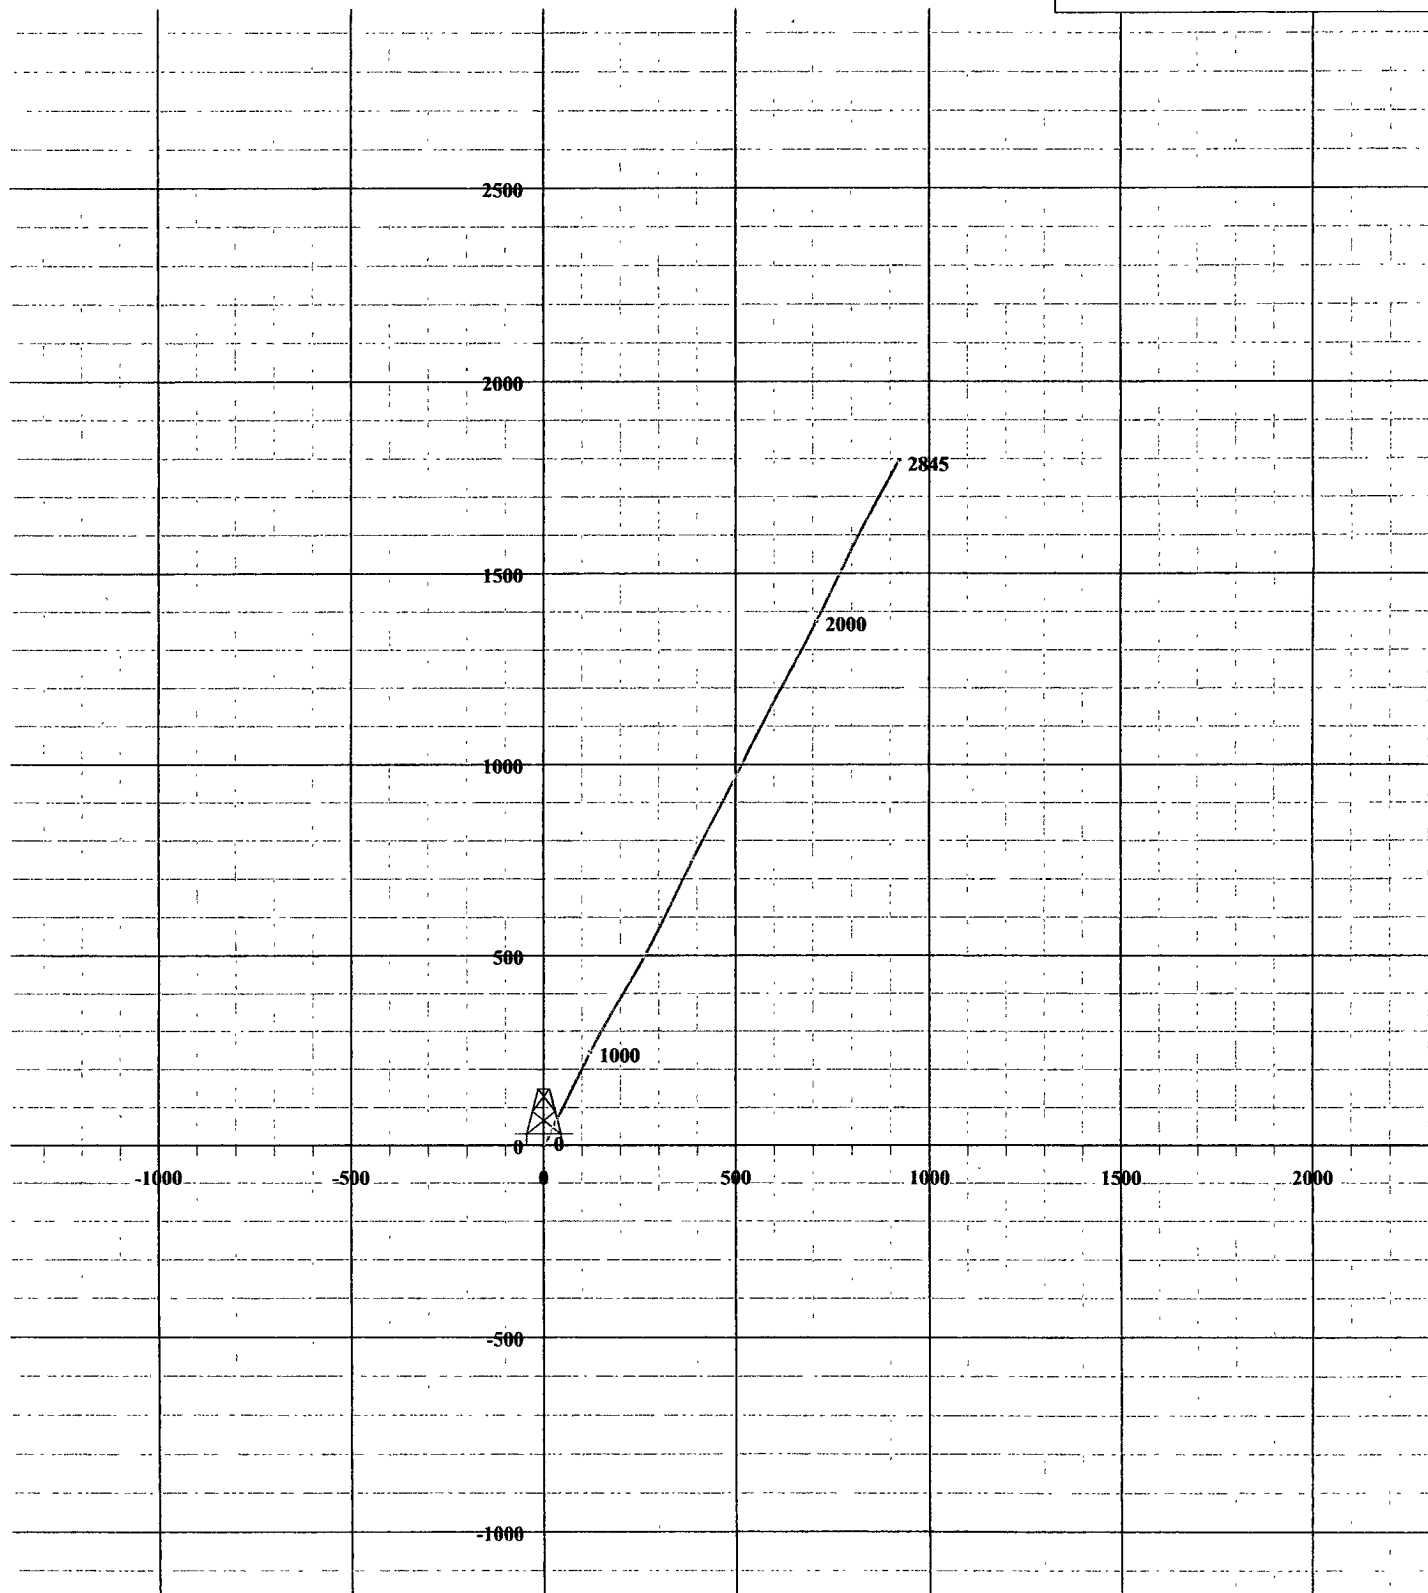

West(-)/East(+) [500ft/in]