

30-045-20608

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 9 Twp 26 Rng 10

Name of Well/Wells or Pipeline Serviced HUERFANO UNIT #201

cps 957w

Elevation 6665' Completion Date 8/25/75 Total Depth 350' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 160'

RECEIVED
MAY 31 1991

Depths gas encountered: N/A

OIL CON. DA
DIST. ?

Type & amount of coke breeze used: 3000 lbs.

Depths anodes placed: 305', 295', 285', 275', 250', 240', 205', 195', 185'

Depths vent pipes placed: N/A

Vent pipe perforations: 200'

Remarks: Fig. #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Completion Date 8-25-61


Well Name <u>Huxford 201</u>		Location <u>SE 9-26N-10W</u>		CPS No. <u>957W</u>						
Type & Size Bit Used <u>6 3/4"</u>				Work Order No. <u>54740.19-50-2</u>						
Anode Hole Depth <u>350'</u>	Total Drilling Rig Time		Total Lbs. Coke Used <u>3,000</u>	Lost Circulation Mat'l Used						
No. Sacks Mud Used										
Anode Depth	# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10
	<u>305</u>	<u>295</u>	<u>285</u>	<u>275</u>	<u>250</u>	<u>240</u>	<u>215</u>	<u>205</u>	<u>195</u>	<u>1</u>
Anode Output (Amps)	# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10
	<u>4.4</u>	<u>4.4</u>	<u>4.4</u>	<u>3.2</u>	<u>3.4</u>	<u>3.8</u>	<u>4.2</u>	<u>4.6</u>	<u>3.2</u>	<u>3</u>
Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance	Volts		Amps		Ohms		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
	<u>11.8</u>		<u>16.5</u>		<u>0.76</u>		<u>2735</u>			

Remarks: Drill With Air Driller said water
160' vent hose perforated 200'
logging anode stopped at 323'

All Construction Completed

Eduard R. Paul
(Signature)

GROUND BED LAYOUT SKETCH

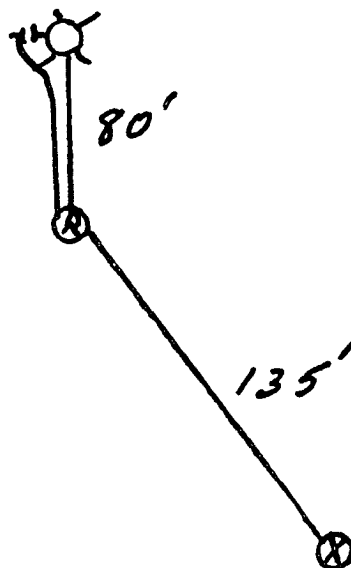

969

