

1477

E

30-045-25583

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit F Sec. 23 Twp 30 Rng 13Name of Well/Wells or Pipeline Serviced MC CORD B #1E

cps 6182w

Elevation N/A Completion Date 12/31/86 Total Depth 340' Land Type* N/ACasing, Sizes, Types & Depths 80'If Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 60' & 220'Depths gas encountered: N/AType & amount of coke breeze used: 2000 lbs.Depths anodes placed: 330', 310', 290', 270', 250', 230', 210', 190', 170', 150'Depths vent pipes placed: N/AVent pipe perforations: N/ARemarks: (gb #1)**RECEIVED**
MAY 31 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☐

6182W

Completion Date 12-31-86


Well Name McCord B-#1E			Location Union Texas Petroleum					
Type & Size Bit Used						Work Order No. 133		
Anode Hole Depth 340		Total Drilling Rig Time		Total Lbs. Coke Used 2000		Lost Circulation Mat'l Used		No. Sacks Mud Used
Anode Depth	#1 330	#2 310	#3 290	#4 270	#5 250	#6 230	#7 210	#8 190
Anode Output (Amps)	#1 1.8	#2 2.0	#3 3.2	#4 1.4	#5 1.1	#6 1.2	#7 1.1	#8 1.0
Anode Depth	#9 170	#10 150						
Anode Output (Amps)	#9 1.1	#10 1.0						
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18
Total Circuit Resistance	Volts 12.0		Amps 13.3		Ohms 0.90		No. 8 C.P. Cable Used 2600	
						No. 2 C.P. Cable Used		

Remarks: **Negative 171 feet**

All Construction Completed

John Smith
(Signature)

GROUND BED LAYOUT SKETCH

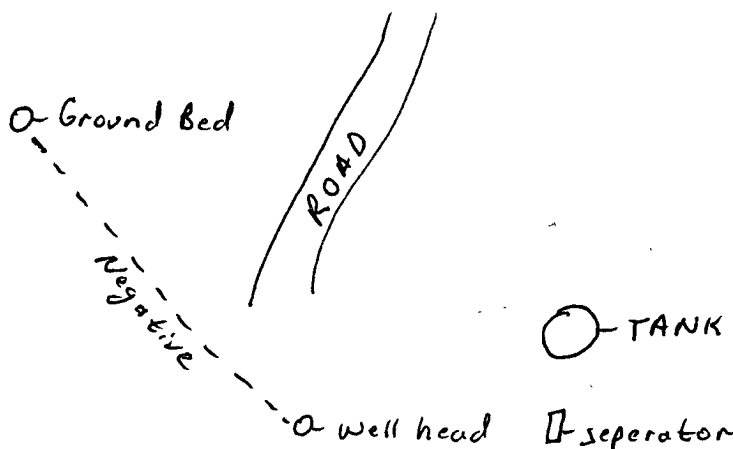

COMPANY Union Texas Petroleum DAILY DRILLING REPORT December 31 1926

WATER AT

FEET.

HOLE MADE:

TOWNSHIP:

RANGE:

60-

\$ 220'

HOLE MADE:

340

FROM

TO

FORMATION IS

COLOR



80'

SAND & GRAVEL (CASING)

Tand Grey

80 -

120-

Sandstone & sand

62

120'

340-

Shale & sand

Erst

REMARKS:

Water volume was approx 30 gallons per minute.

Driller

Cozy Members

Tool Dresser