

30-039-07669

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 8 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #48

cps 267w

Elevation 6236' Completion Date 3/8/63 Total Depth 200' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1520 lbs.

Depths anodes placed: 185', 179', 170', 156', 115'


Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

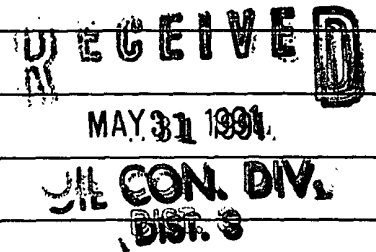

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 3-8-63

WELL NAME SAN VUAN 29-7 #48 CPS NO. 267W

LOCATION 8-29N-7W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 200'

TOTAL DRILLING RIG TIME 9 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED _____

NUMBER SACKS LOST CIRCULATION MAT'L USED _____

ANODE DEPTHS #1 185', #2 179', #3 170', #4 156 & 115'

TOTAL LBS. COKE USED 1520 lbs

ANODE OUTPUTS 12 VOLTS, #1 2.4, #2 2.7, #3 2.6, #4 2.0 & 2.4

TOTAL CIRCUIT RESISTANCE: VOLTS 11.8 AMPERES 6.7 OHMS 1.76 Ω

NUMBER FEET SURFACE CABLE CONDUIT 454'

DRILLING LOG (ATTACH HERETO).


FORMATION LOG (ATTACH HERETO).

REMARKS: Static 9/5 .69R 600' W

ALL CONSTRUCTION COMPLETED

C. Paulk
SIGNATURE

GROUND BED LAYOUT SKETCH

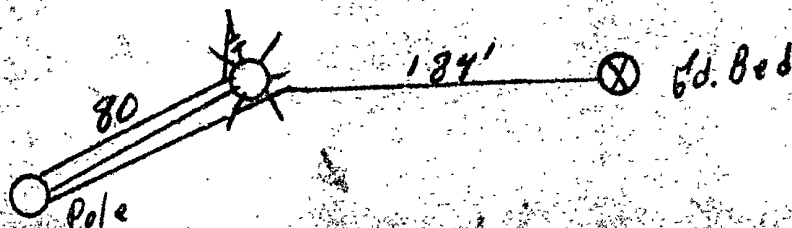

ORIGINAL & 1 COPY
ALL REPORTS

DATE 7-7-1963

EVENING

Driller				Total Men In Crew				Driller				Total Men In Crew				Driller				Total Men In Crew			
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.				
0	113	SANDSTONE	6.2210																				
113	200	SANDSTONE																					
REMARKS -																							
3-7-63 Drilled To 60'																							
3-8-63 " From 60' To 200' 1100s water 9 hrs.																							
REMARKS -																							
3-7-63 Drilled To 60'																							
3-8-63 " From 60' To 200' 1100s water 9 hrs.																							
REMARKS -																							

10