

30-045-10044

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 32 Twp 31 Rng 8

Name of Well/Wells or Pipeline Serviced EPNG COM A #2

cps 253w

Elevation 6041' Completion Date 5/15/63 Total Depth 200' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1700 lbs.

Depths anodes placed: 125', 105', 99', 93', 87'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

WELL NAME Flintgate No. 2 DATE May 15, 1963
LOCATION SW⁴ Sec. 32 T31N R. 8W CPS NO. 253W

WORK ORDER NUMBER 189-40542-50-02

ANODE HOLE DEPTH 200

TOTAL DRILLING RIG TIME 6 Hrs.

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 6 1/4 Rock-

NUMBER SACKS MUD USED 1

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 125', #2 105, #3 99, #4 93 45 87

TOTAL LBS. COKE USED ~~1475~~ 1700 20 sacks

ANODE OUTPUTS 12.2 VOLTS, #1 2.3, #2 2.0, #3 ~~2.3~~ 2.5, #4 3.0 5 2.5

TOTAL CIRCUIT RESISTANCE: VOLTS 11.8 AMPERES 6.0 OHMS 1.96

NUMBER FEET SURFACE CABLE CONDUIT 313'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).


REMARKS: Static 2/5 67R 600' N

Good All Rectifier 28V12A Ser. # 6206166
wash out up hole from Anodes

ALL CONSTRUCTION COMPLETED

Shrubs
SIGNATURE

GROUND BED LAYOUT SKETCH

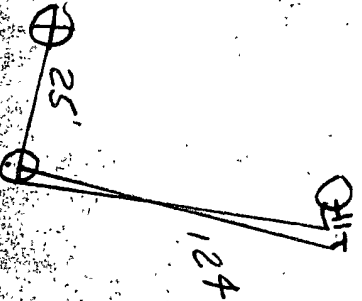

ORIGINAL & 1 COPY
ALL REPORTS

90'

DAILEY DRILLING REPORT

81916. STATE NO. 2

LEASE 3612151088 WELL NO.

CONTRACTOR
Wilson

NO. 42

REPORT NO.

DATE ~~11/17/87~~

1961

MORNING

DAYLIGHT

EVENING

Driller					Total Men in Crew					Driller					Total Men in Crew				
FROM	TO	FORMATION	W-BIT	R.P.M.	FROM	TO	FORMATION	W-BIT	R.P.M.	FROM	TO	FORMATION	W-BIT	R.P.M.	FROM	TO	FORMATION	W-BIT	R.P.M.
0	30	sand	2800		110	170	sand ss & clay	2800											
30	40	clay	1		170	175	sand ss & clay	1											
40	90	ss	1		175	180	ss & clay	1											
90	110	ss & clay	1		180	200	ss & clay	1											

BLT. NO.	NO. DC	SIZE	LENG.	BLT. NO.	NO. DC	SIZE	LENG.
SERIAL NO.	NO. DC	SIZE	LENG.	SERIAL NO.	NO. DC	SIZE	LENG.
SIZE	SINGLES			SIZE	SINGLES		
TYPE	DOWN ON KELLY			TYPE	DOWN ON KELLY		
MAKE	TOTAL DEPTH	200		MAKE	TOTAL DEPTH		
MUD RECORD	MUD ADDITIVES USED AND RECEIVED			MUD RECORD	MUD ADDITIVES USED AND RECEIVED		

[illegible][illegible]

REMARKS:

REMARKS

REMARKS

MARKS	REMARKS	EXAMINER
May 14 - moved 10:00	5th Aug 11:00 Drill = d 200'	Finished hole 400'

SIGNED: Toolpush

Company, Supervisor

Offenbach