

38 - 30-039-07229
56- 30-039-07228

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 32 Twp 28 Rng 5

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-5 UNIT #38, #56

cps 732w

Elevation 6590' Completion Date 4/21/66 Total Depth 295' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 50'

Depths gas encountered: N/A

Type & amount of coke breeze used: 5125 lbs.

Depths anodes placed: 261', 255', 249', 243', 237', 231', 225', 219', 213', 100'


Depths vent pipes placed: 261' OF 3/4" PLASTIC HOSE

Vent pipe perforations: BOTTOM 60'

Remarks: qb #1 FIRST HOLE(180") CAVED.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

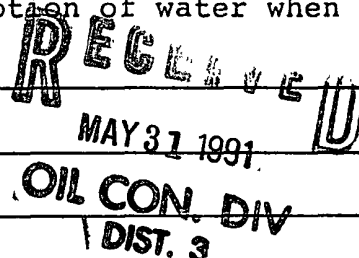

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

4 3/4" #7 = 60' Item #49

Date 4-21-66

Well Name SU 28-5# 38 & SU 28-5# 56			CPS No. 732 W		
Location SW 2-28-5			Work Order No. 184-5377-50-20		
Anode Hole Depth 295	Total Drilling Rig Time 20 1/2 Hrs	Type & Size Bit Used 7 7/8 - 45407 = 295		No. Sacks Mud Used 1	
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth	#1 261	#2 255	#3 249	#4 243
		#5 237	#6 231		
Total Lbs. Coke Used 5125	Anode Output (Volts)	#1 2.5	#2 3.0	#3 3.7	#4 3.9
		#5 4.0	#6 4.2		
Total Circuit Resistance Volts 11.0	Amps 11.8	Ohms 0.93	No. Ft. Surface Cable Conduit 2633 on Anodes		
			7 225	8 219	9 213
			7 3.6	8 3.6	9 4.0
			10 100	10 4.9	

Drilling Log (Attach Hereto). ☐

Remarks: Static 600 SE No. 38 = .80 600 SW No. 56 = .67
3/4" Plastic Hose to Bottom Anode - Perforated Bottom 60'
10 lbs Chemical to GB

Good All Rectifier-30-20- 3 Neg. Ser. 65C 6658

All Construction Completed

Amels
(Signature)

1137'
2633'
3770' TOTAL #8 WIRE

GROUND BED LAYOUT SKETCH

