

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: P 16 32 11 LEASE NUMBER: E-3092

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #006A MV - 30-045-22095
DUALWELL COX CANYON #16 30-045-21582

ELEVATION: 6548' GR COMPLETION DATE: 02/29/76 TOTAL DEPTH: 375 ft. LAND TYPE: STA

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top: N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 80 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '.

COKE: 9315 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 80 ft. BOTTOM ANODE @ 370 ft.


VENT PIPE: 1" PVC Set @ 375 ft. Vent pipe perforated from 60 ft. to 375 ft.

REMARKS: _____

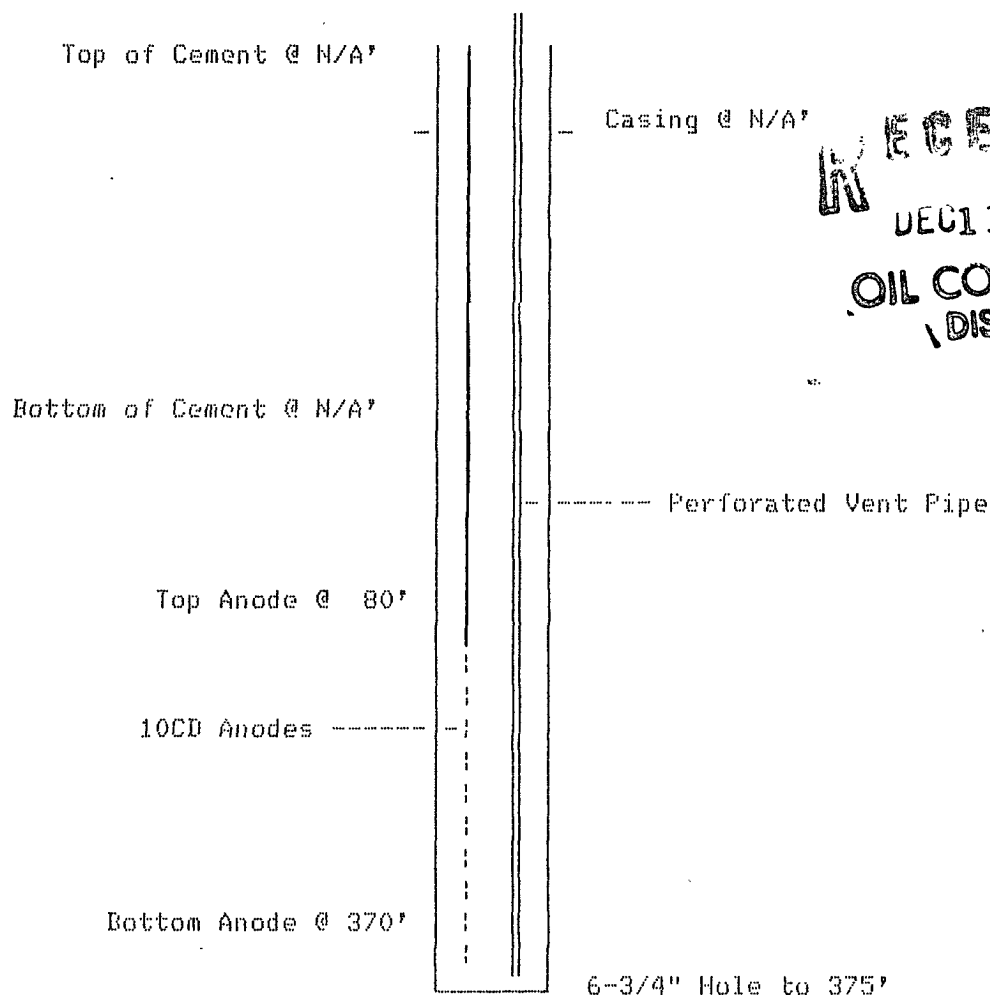

RECEIVED
DEC 11 1991
OIL CON. DIV.
DIST. 3

#2



GENERAL
CORROSION
SERVICES

SHEET NO. 2JOB NO. 60102-1DATE: 2-29-7SURVEY: Cox Canyon #16BY: BT

	TEST LOCATION						
		50	5.6	200	10.0	350	5.2
①	370		9.5		11.0		3.5
2	360		14.0		13.0		3.6 ②
3	290		17.0		14.0		3.6
4	275		17.0		20.0		3.0 ②
5	265	75	14.0	225	26.0	375	3.0 TP
6	255		4.9 ②		4.8		
7	245		6.0		3.2 ②		
8	235		5.6		3.9		
9	175		5.6		3.9 ②		
10	80	100	8.1	250	3.5	400	
			14.0		3.5 ②		
			19.0		3.4		
			26.0		3.9 ⑤		
			18.0		3.7		
		125	32.0	275	4.3	④	
			40.0		5.0		
			44.0		6.0		
			43.0		4.8 ③		
			30.0		5.4		
		150	8.7	300	5.9		
			9.0		8.8		
			10.0		11.0		
			10.0		6.9		
			6.2		6.4		
		175	5.1 ②	325	6.7		
			6.1		7.9		
			5.7		10.0		
			6.6		22.0		
		195	9.0	345	13.0		

NOTES:

Water at 80'0.44 52 CR4800 ± COKE