

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: P 21 32 11 LEASE NUMBER: NM-03189

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #004A MV 30-045-22093
DUALWELL COX CANYON #11 30-045-21163

ELEVATION: 6557' GR COMPLETION DATE: 02/25/76 TOTAL DEPTH: 405 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top:N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 60 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '

COKE: 6345 lbs. of Metalurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 220 ft. BOTTOM ANODE @ 395 ft.

VENT PIPE: 1" PVC Set @ 405 ft. Vent pipe perforated from 200 ft. to 405 ft.

REMARKS: _____

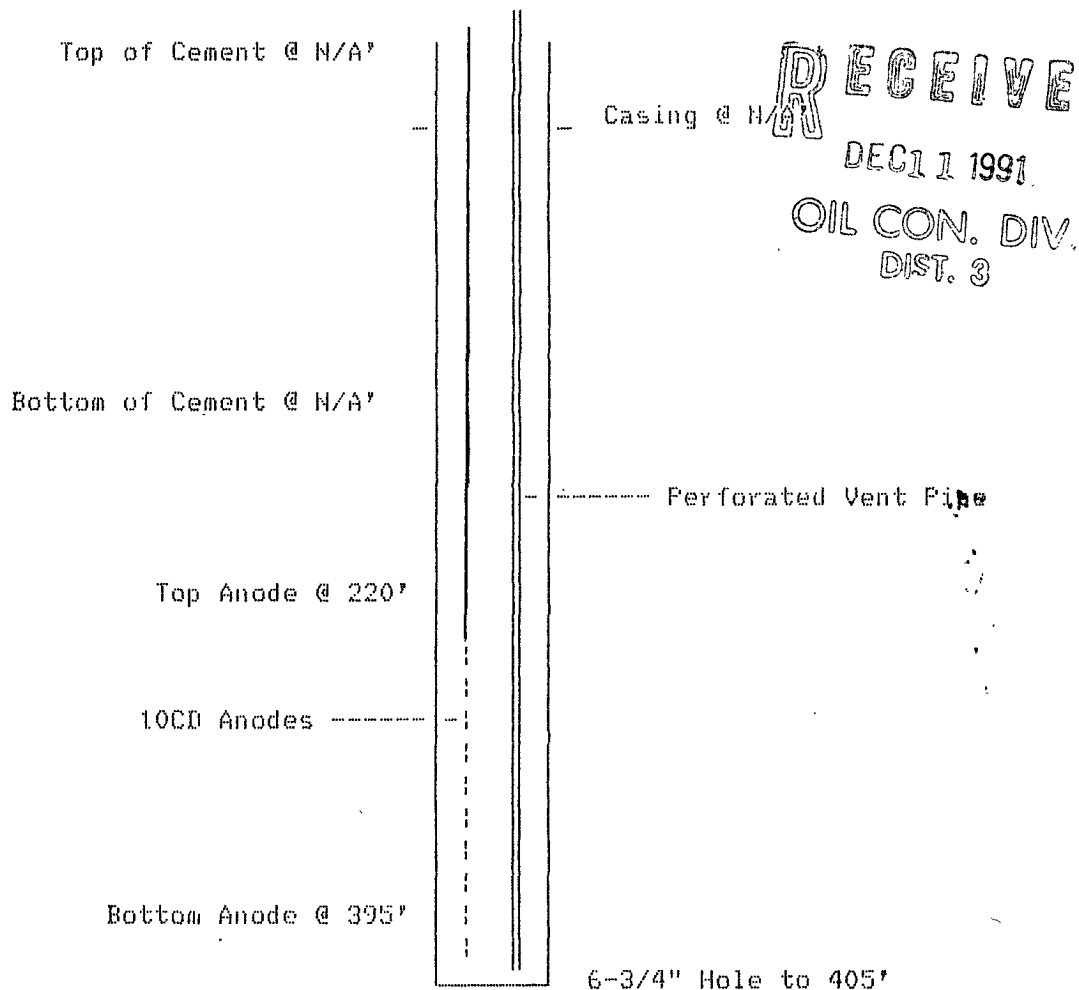



GENERAL
CORROSION
SERVICES

SHEET NO. 1

JOB NO. 60102-1

DATE: 2-25-76

SURVEY: Cox Canyon #11 & 4

BY: BT

TEST LOCATION							
		180	12.0	250	4.0	400	3.8
#1	395		19.0		3.8	405	4.0
#2	350		28.0		3.4		TD
#3	335		25.0		4.1		
#4	325		18.0		4.1		
#5	315	125	14.0	275	4.6	2425	
#6	305		10.0		2.6		
#7	275		10.0		6.2		
#8	265		9.8		5.6		
#9	255		10.0		5.4		
#10	220	150	11.0	300	5.1		
			13.0		3.3		
			11.0		3.6		
			10.0		3.9		
			11.0		3.2		
		175	11.0	325	3.6		
			10.0		3.6		
			10.0		4.2		
			11.0		4.8		
			10.0		5.1		
		200	10.0	350	4.4		
			10.0		4.6		
			8.3		6.0		
			5.5		7.5		
			5.0		7.2		
		225	6.6	375	7.8		
			7.2		7.6		
			7.0		5.2		
			6.2		4.2		
		245	5.1	395	3.6		

NOTES:

Let At 60' Had To Mud At 60'
74 52 CR