

50-30-039-06807
183-30-039-06808

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 31 Twp 27N Rng 6W

Name of Well/Wells or Pipeline Serviced Rincon #50 PC Rincon #183 DK

Elevation 6648' Completion Date 11/2/1965 Total Depth 290 Land Type* F

Casing, Sizes, Types & Depths None

If Casing is cemented, show amounts & types used None

If Cement or Bentonite Plugs have been placed, show depths & amounts used
None

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 80' to 100' 20' thick

Depths gas encountered: NA

Type & amount of coke breeze used: Type unknown 4070 lbs

Depths anodes placed: 135' to 210'

Depths vent pipes placed: 127'

Vent pipe perforations: ?

Remarks: El Paso Natural Gas was the operator when this ground bed was installed.

First ground bed install at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 09 1990
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 11-2-65

Well Name <u>Rincon # 50 & Rincon # 183</u>			CPS No. <u>705W</u>		
Location <u>SW 31-27-6</u>			Work Order No. <u>52692 & 5274</u>		
Anode Hole Depth <u>290</u>	Total Drilling Rig Time <u>21 Hrs</u>	Type & Size Bit Used <u>07745X = 290'</u>	No. Sacks Mud Used <u>1</u>		
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth <u>#7 129</u>	<u>#8 123</u>	<u>9 117</u>		
	<u>#1 210</u>	<u>#2 204</u>	<u>#3 198</u>	<u>#4 192</u>	<u>#5 186</u>
Total Lbs. Coke Used <u>4070</u>	Anode Output (Volts) <u>#1 3.8</u>	<u>#8 5.2</u>	<u>#9 5.3</u>		
	<u>#1 4.0</u>	<u>#2 4.3</u>	<u>#3 3.9</u>	<u>#4 3.7</u>	<u>#5 3.6</u>
Total Circuit Resistance Volts <u>11.0</u>	Amps <u>10.0</u>	Ohms <u>1.1</u>	No. Ft. Surface Cable Conduit <u>822'</u>		

Drilling Log (Attach Hereto). ☐


Remarks: Static Rincon # 183. 600' S = .62
" " " 50 600' E = .64

Install 30V 20A (3 NEG.) Good All Rectifier Ser. No. 65C6663
127' 3/4" Plastic Hose - 4lbs Chem. added to Hole

All Construction Completed

Darrell
(Signature)

GROUND BED LAYOUT SKETCH

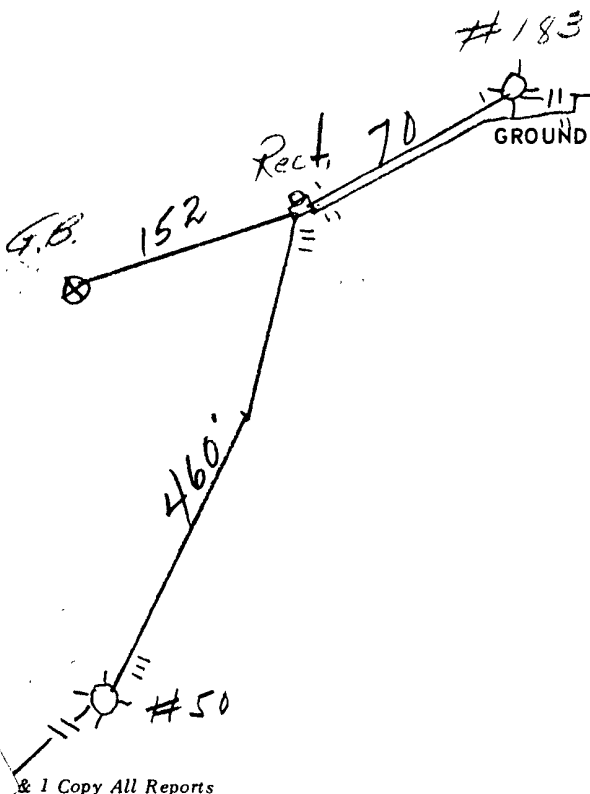

2406' #8 WIRE

140
152
460

752
70

522

N

DRILLING DEPARTMENT

DAILY DRILLING REPORT

LEASE			WELL NO. 705-W			CONTRACTOR L. E. Wilson			RIG NO. D-6			REPORT NO.			DATE 11-29-1965				
MORNING						DAYLIGHT						EVENING							
Driller		Total Men In Crew				Driller		Total Men In Crew				Driller		Total Men In Crew					
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.					
90	80	Sandstone			190	220	Shale												
90	100	Water Sand			220	290	Sandy Shale												
100	150	Shale																	
150	190	Sandstone																	
BIT NO. 077445X		NO. DC		SIZE	LENG.	BIT NO.		NO. DC		SIZE	LENG.	BIT NO.		NO. DC		SIZE	LENG.		
SERIAL NO. 7 3/8		NO. DC		SIZE	LENG.	SERIAL NO.		NO. DC		SIZE	LENG.	SERIAL NO.		NO. DC		SIZE	LENG.		
SIZE 7 3/8		STANDS		STANDS				STANDS		STANDS				STANDS		STANDS			
TYPE 2901		SINGLES		SINGLES				SINGLES		SINGLES				SINGLES		SINGLES			
TYPE		DOWN ON KELLY		DOWN ON KELLY				DOWN ON KELLY		DOWN ON KELLY				DOWN ON KELLY		DOWN ON KELLY			
MAKE		TOTAL DEPTH		TOTAL DEPTH				TOTAL DEPTH		TOTAL DEPTH				TOTAL DEPTH		TOTAL DEPTH			
MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED				
Time	Wt.	Vis.	1 Mud			Time	Wt.	Vis.				Time	Wt.	Vis.					
FROM	TO	TIME BREAKDOWN				FROM	TO	TIME BREAKDOWN				FROM	TO	TIME BREAKDOWN					
								Total rig						11-29-65					
														11-30-65					
														11-30-65					
REMARKS -						REMARKS -						REMARKS -							
10-29-65 - left last loc. 1100 Mm						10-29-65 - left last loc. 1100 Mm						10-29-65 - left last loc. 1100 Mm							
11-1-65 - moved to ground Bed drilled 1						11-1-65 - moved to ground Bed drilled 1						11-1-65 - moved to ground Bed drilled 1							
11-2-65 - left yard at 600 amved rig						11-2-65 - left yard at 600 amved rig						11-2-65 - left yard at 600 amved rig							
11-2-65 - left yard at 600 amved rig						11-2-65 - left yard at 600 amved rig						11-2-65 - left yard at 600 amved rig							

SIGNED: Toolpusher

____ Company Supervisor