

90 - 30-039-07723
444 - 30-039-24296

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 36 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #90, #444

cps 237w

Elevation 6567' Completion Date 5/3/63 Total Depth 100' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 680 lbs.

Depths anodes placed: 80', 74', 65', 55', 45'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991
JIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 5-3-63

WELL NAME ~~Turner State #4~~ 30-6 #10 CPS NO. 237W

LOCATION 36-30N - 6W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 100'

TOTAL DRILLING RIG TIME 4 1/2 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 80', #2 74', #3 65', #4 55 5 45

TOTAL LBS. COKE USED 680 lbs

ANODE OUTPUTS 12 VOLTS, #1 3.5, #2 3.8, #3 4.2, #4 3.8 5 3.8

TOTAL CIRCUIT RESISTANCE: VOLTS 11.2 AMPERES 9.7 OHMS 1.16

NUMBER FEET SURFACE CABLE CONDUIT 468'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static $\frac{9}{5} = .71 R$ 600' W


Installed Good-All Rect 28V 12A

Serial # 62C6334

ALL CONSTRUCTION COMPLETED

E. Paulch
SIGNATURE

GROUND BED LAYOUT SKETCH

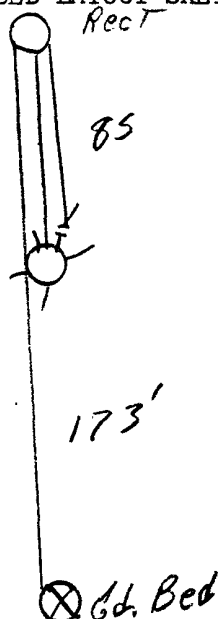

ORIGINAL & 1 COPY
ALL REPORTS

867'

DAILY DRILLING REPORT

LEASE **Tanner State** WELL NO. **4** CONTRACTOR **L.E. Wilson** RIG NO. **D2** REPORT NO. **5-2** DATE **5-2** 19**63**

MORNING

DAYLIGHT

EVENING

Driller				Total Men In Crew				Driller				Total Men In Crew			
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	
0	30	SANDSTONE	1500												
30	100	Shale	11												
			11												
			11												
BIT NO. 51588 X				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500			
SERIAL NO. 6-4				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500			
SIZE 6-4				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500			
TYPE Rock				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500			
MAKE Walker Mfg				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500				NO. DC 6-4 SIZE 1500 LENG. 1500			
MUD RECORD				MUD, ADDITIVES USED AND RECEIVED				MUD RECORD				MUD, ADDITIVES USED AND RECEIVED			
Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	
FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			
		MORNING + SET UP TIME					LEFT Bloomfield Rd					Rig Time 4 1/2 hrs			
		5:00 AM					6:00 AM. Arrived At Rig								
		Drilling Time 2 hrs					7:30 Finished Hole 100								
		LEFT Rig 6:00 PM					1 1/2 hrs								
REMARKS-				REMARKS -				REMARKS -				REMARKS -			
5-2-63				Drilled 0-100 FT				Hard Water							
5-3-63				Clean & Flushed Hole											

SIGNED: Toolpusher _____ Company Supervisor **CRP**