

12 - 30 - 039 - 07752
492 - 30 - 039 - 24889

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 26 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #12, #492

cps 238w

Elevation 6556 Completion Date 5/2/63 Total Depth 140' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1005 lbs.

Depths anodes placed: 120', 114', 100', 90', 80'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 5-2-63

WELL NAME SAN JUAN 30-5 #12 CPS NO. 238 W

LOCATION 26-30N-6W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 140'

TOTAL DRILLING RIG TIME 4 1/2 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 120, #2 114, #3 100, #4 90 580

TOTAL LBS. COKE USED 1005 lbs

ANODE OUTPUTS 12 VOLTS, #1 3.9, #2 4.0, #3 3.8, #4 4.2 5 4.0

TOTAL CIRCUIT RESISTANCE: VOLTS 11.5 AMPERES 9.5 OHMS 1.22

NUMBER FEET SURFACE CABLE CONDUIT 545'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static $\frac{3}{4}$ = .75 R 600' SW


Installed Rod-All 28V 12A Rect

Serial # 6206318

ALL CONSTRUCTION COMPLETED

E. Paulch
SIGNATURE

GROUND BED LAYOUT SKETCH

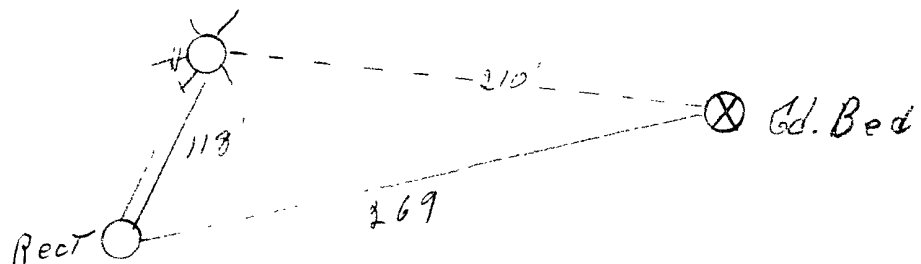

ORIGINAL & 1 COPY
ALL REPORTS

1129'

LEASE Box 2000 30-6 WELL NO. 412 CONTRACTOR T.E. Wilson RIG NO. 02 REPORT NO. DATE 5-2 19 63

MORNING

DAYLIGHT

EVENING

Driller					Total Men In Crew					Driller					Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.					
0	60	Sand Stone	1575X		125	140	Shale	1565X											
60	75	Sandy Shale	"																
75	115	Shale	"																
115	135	Sandy Clay	"																

	NO. DC _____ SIZE _____ LENG. _____		NO. DC _____ SIZE _____ LENG. _____		NO. DC _____ SIZE _____ LENG. _____
BIT NO.	NO. DC _____ SIZE _____ LENG. _____	BIT NO.	NO. DC _____ SIZE _____ LENG. _____	BIT NO.	NO. DC _____ SIZE _____ LENG. _____
SERI. <i>Q. 1556 X</i>	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS
SIZE <i>6 1/4</i>	SINGLES	SIZE	SINGLES	SIZE	SINGLES
TYPE <i>Rock</i>	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY
MAKE <i>Walker Mfg. Co.</i>	TOTAL DEPTH <i>140</i>	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH

[illegible]

FROM	TO	TIME BREAKDOWN
		Moving & Setup Time # ½ hr.
		Drilling Time # Finished hole 2:00 pm

REMARKS -

5-2-63

Drilled From 0-140

REMARKS -

1. Load Water

REMARKS -

SIGNED: Toolpusher

____ Company Supervisor

PRP