

30-039-07811  
30-039-24153

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 24 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #76, #412

cps 168w

Elevation 6623' Completion Date 4/10/63 Total Depth 120' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 850 lbs.

Depths anodes placed: 88', 82', 76', 70', 64'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1

RECEIVED  
MAY 31 1991  
OIL CON. DIV  
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

WELL CASING  
CATHODIC PROTECTION CONSTRUCTION REPORT  
DAILY LOG

DATE 10 April 1963

WELL NAME McElvain No 3-A CPS NO. 168W

LOCATION NE<sup>2</sup> Sec. 24 T30NR7W

WORK ORDER NUMBER 184-40542-5D-02

ANODE HOLE DEPTH 120'

TOTAL DRILLING RIG TIME 6 Hrs.

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 6 1/4 Rock WM. # 1555

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 88, #2 82, #3 76, #4 70 #5 64

TOTAL LBS. COKE USED 850 lbs. (10 Sacks)

ANODE OUTPUTS 12.3 VOLTS, #1 2.6, #2 3.4, #3 3.8, #4 3.8 #5 3.7

TOTAL CIRCUIT RESISTANCE: VOLTS 12.0 AMPERES 7.0 OHMS 1.71

NUMBER FEET SURFACE CABLE ~~CONDUIT~~ 555'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static c/s .61 R 600' W


Good All Rectifier 28V 12A

Serial # 62C 6273

TAG # 168-W

ALL CONSTRUCTION COMPLETED

Sorrels  
SIGNATURE

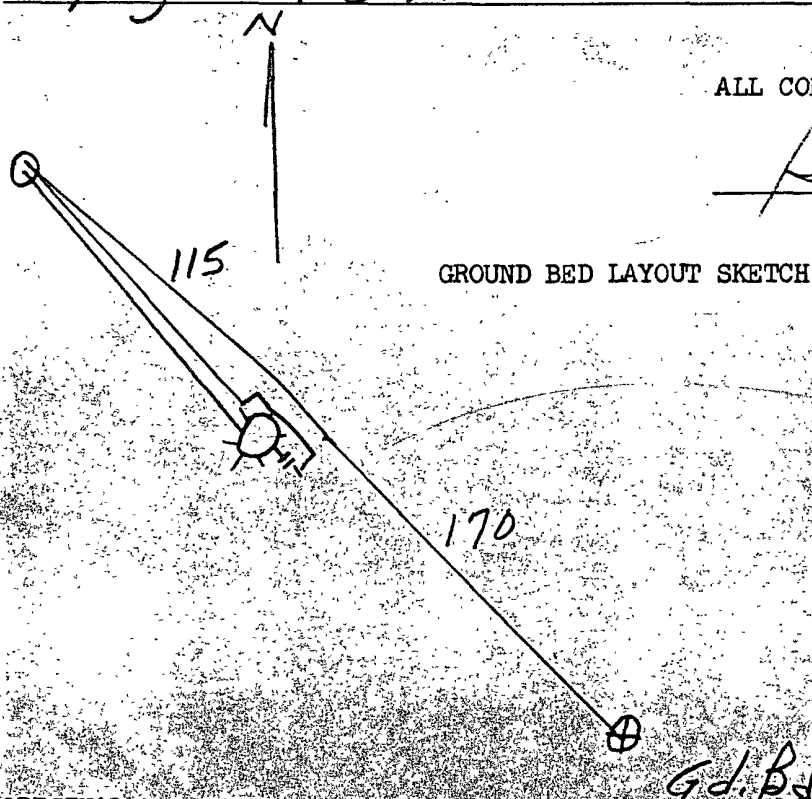

ORIGINAL & 1 COPY  
ALL REPORTS

970

# DAILY DRILLING REPORT

**MORNING**

[illegible]

|                                  |      |
|----------------------------------|------|
| TOTAL DEPTH                      | 120' |
| MUD, ADDITIVES USED AND RECEIVED |      |

1 1/2 inch

[illegible]

REMARKS -

PAVILION - 2nd fl.  
April 10 - drilled 60' - cleared

## Company Supervisor

*James H. Hunt*