

1- 30-045-09504
11- 30-045-21045
115- 30-045-21983-

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 14 Twp 30 Rng

Name of Well/Wells or Pipeline Serviced GRAMBLING C #1,

GRAMBLING C #11, GRAMBLING C #11J cps lw

Elevation 6387' Completion Date 6/10/64 Total Depth 350' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 26 SACKS

Depths anodes placed: 274', 268', 262', 256', 250', 244'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #2 ANODES DID NOT RESPOND TO COKE, POSSIBLE CAVE IN, OR DEEP

BRIDGE. PUT WATER DOWN GROUND BED #1.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 6-10-64

Well Name <u>Grambling No 1-C</u>			CPS No. <u>1 W</u>		
Location <u>NE 14-30-10</u>			Work Order No. <u>184-52056-90-54</u>		
Anode Hole Depth <u>350'</u>	Total Drilling Rig Time <u>22 Hrs</u>	Type & Size Bit Used <u>6 1/4 Rock - 5714X</u>		No. Sacks Mud Used <u>4</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>274</u>	# 2 <u>268</u>	# 3 <u>262</u>	# 4 <u>256</u>	# 5 <u>250</u>
Total Lbs. Coke Used <u>5200</u>	Anode Output (Volts)				
<u>265ks</u>	# 1 <u>2.7</u>	# 2 <u>3.2</u>	# 3 <u>3.6</u>	# 4 <u>3.3</u>	# 5 <u>3.4</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>12.0</u>	Amps <u>6.0</u>	Ohms <u>2.0</u>	<u>125</u>		


Drilling Log (Attach Hereto). ☐

Remarks: Note - Anodes did not Respond to Coke -
Possible Cave in or Deep Bridge -
26 Sack of coke at 13' = 330
Put water Down Pipe on Gnd. Bed #1

All Construction Completed

O. H. Daniels
(Signature)

GROUND BED LAYOUT SKETCH

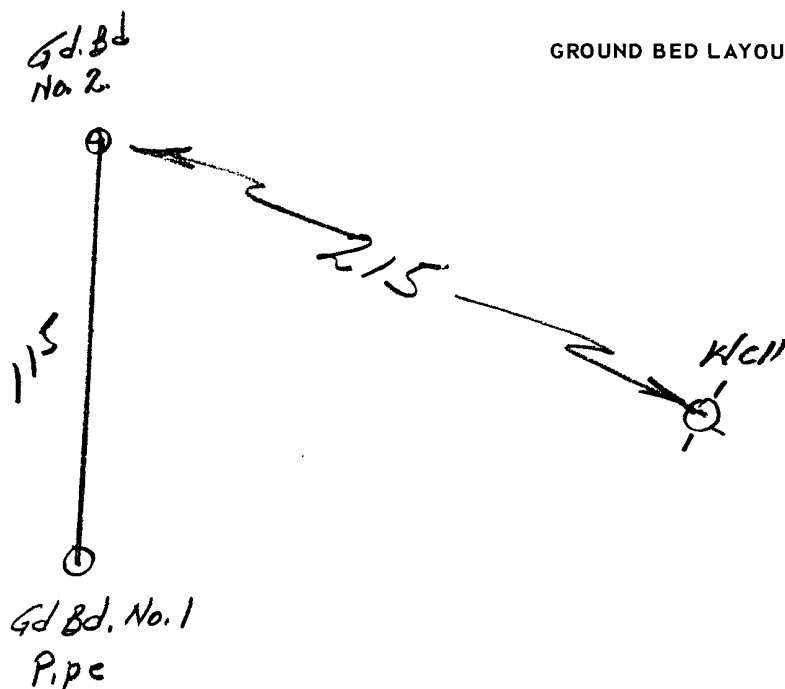

DAILY DRILLING REPORT

ET

1964

[illegible]

SIGNED: Toolpusher

Company Supervisor