

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE\*  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>		#151M 30-039-25206 #199 30-039-2038		5. LEASE DESIGNATION AND SERIAL NO. NM 012209	
2. NAME OF OPERATOR Union Oil Company of California dba UNOCAL				6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A	
3. ADDRESS OF OPERATOR P.O. Box 850, Bloomfield, New Mexico 87413				7. UNIT AGREEMENT NAME Rincon Unit	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface Rincon Unit 151M - 1150' FSL + 1675' FEL Rincon Unit 199 - 1000' FSL, 1480' FEL				8. FARM OR LEASE NAME Rincon Unit	
14. PERMIT NO.				9. WELL NO. 151 M, 199	
15. ELEVATIONS (Show whether DF, RT, etc.) 6704 GR, 6703 GR				10. FIELD AND POOL, OR WILDCAT Blanco MV/ Basin DK Blanco S-PC	
16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data				11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 14, T27N, R7W	
17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)				12. COUNTY OR PARISH Rio Arriba	
				13. STATE NM	

RECEIVED  
OCT 22 1992

OIL CON. DIV  
DIST. 3

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF	PULL OR ALTER CASING
FRACTURE TREAT	MULTIPLE COMPLETION
SHOOT OR ACIDIZE	ABANDON*
REPAIR WELL	CHANGE PLANS
(Other) Install Cathodic Protection	

SUBSEQUENT REPORT OF:

WATER SHUT-OFF	REPAIRING WELL
FRACTURE TREATMENT	ALTERING CASING
SHOOTING OR ACIDIZING	ABANDONMENT*
(Other)	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

Proposed installation of Cathodic Protection to well casing:

PROCEDURE: Drill a 6' diameter hole, 300' deep within the existing well location boundary. Ten Dur-Iron anodes will be installed below the uppermost water bearing formation in favorable locations. This will be backfield with coke breeze (99.5% carbon) to completely surround the anodes. A 50' plug of bentonite will be installed on top of the coke breeze.

A DC rectifier will be installed on existing well location and a buried DC positive cable will be connected to the anode from the rectifier. Negative DC cables from the rectifier will also be buried and connected to well casings to be protected. These cables will be buried 18" to 24" deep (on previously disturbed ground) in existing roads and locations. See attached map.

UNOCAL's completion expectation is July 1, 1993.

ACCEPTED FOR RECORD  
FARMINGTON RESOURCE AREA

OCT 14 1992

FARMINGTON, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED Donald E. Luthersheim

TITLE (Temp.) Production Tech

DATE 9/21/92

(This space for Federal or State office use)

APPROVED BY  
CONDITIONS OF APPROVAL, IF ANY:


TITLE

DATE

\*See Instructions on Reverse Side

NMOCD

ON UNIT

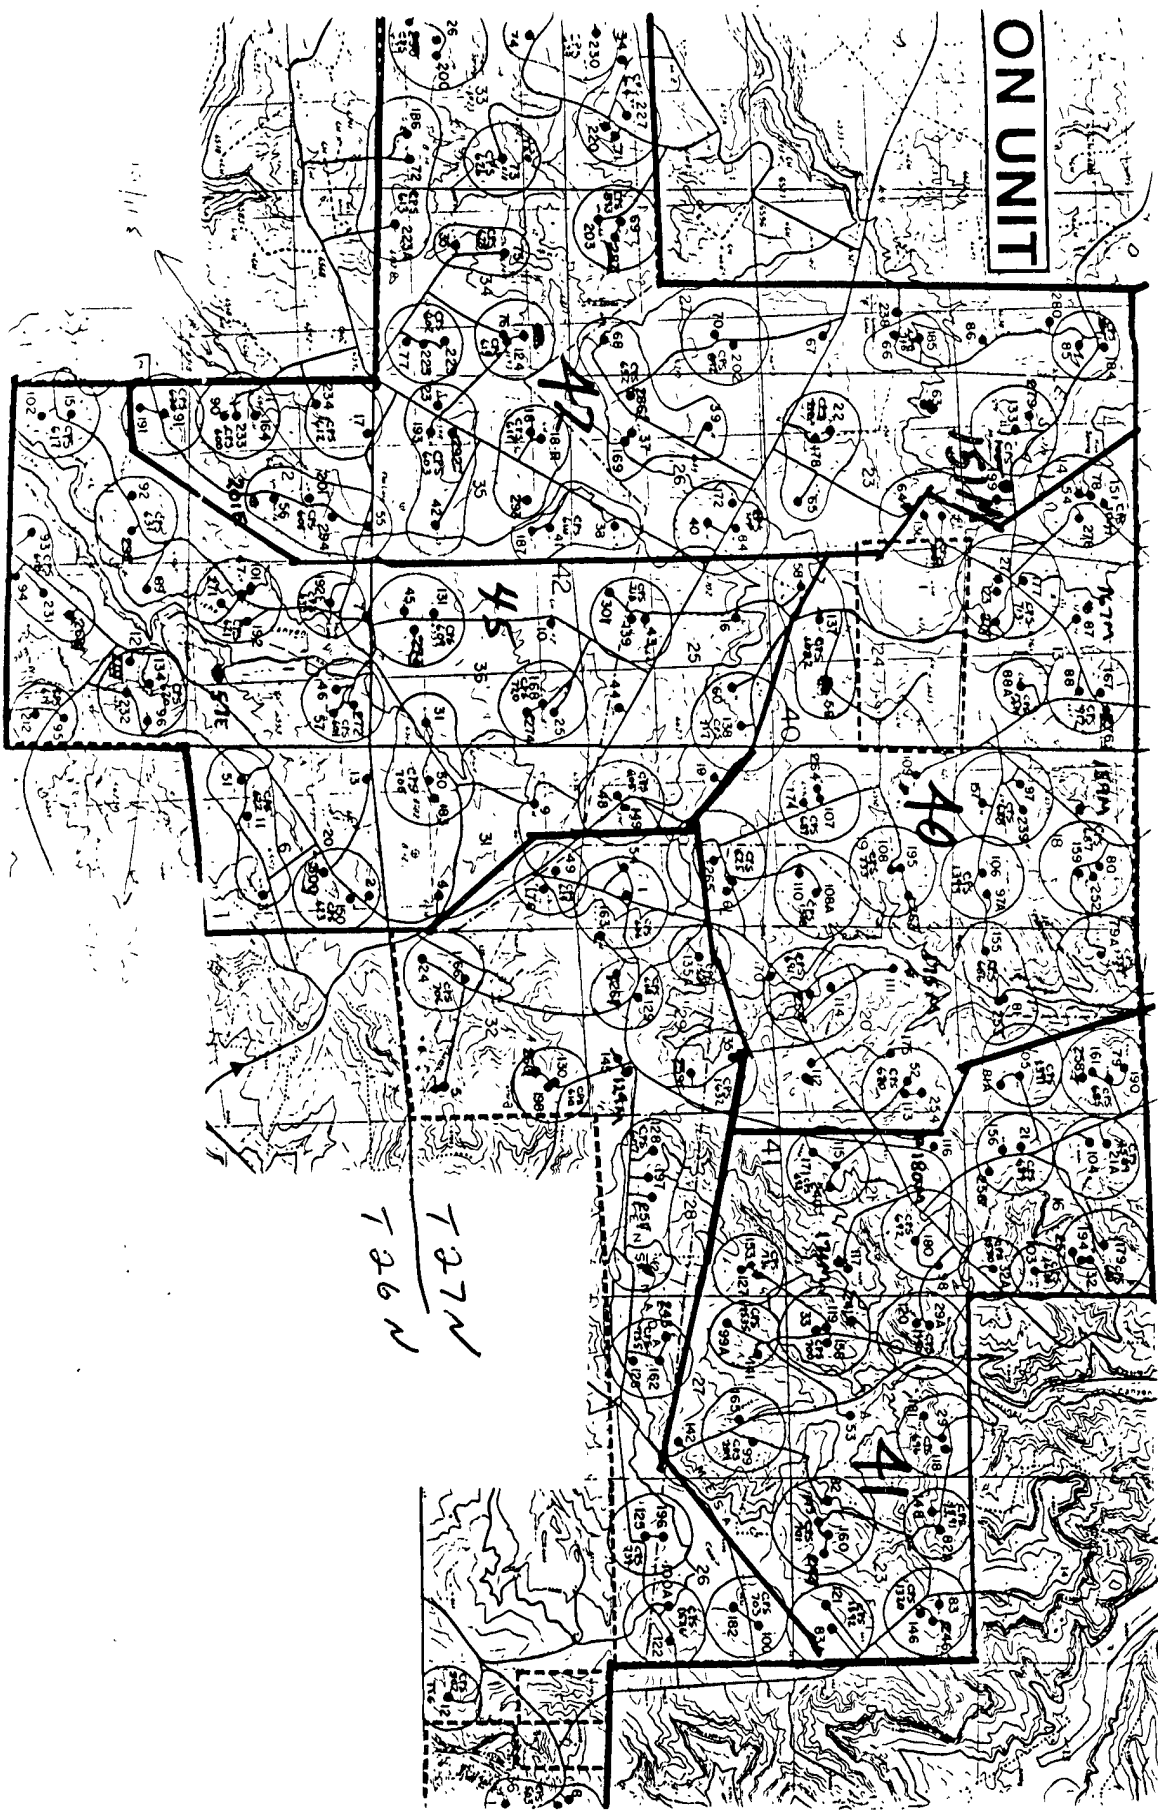

R 7 W  
R 6 W

T 27 N  
T 26 N