

1-30-045-07318  
6-30-045-21041

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit H Sec. 21 Twp 28 Rng 8

Name of Well/Wells or Pipeline Serviced GRAMBLING A #1, #6

cps 470w

Elevation 5808' Completion Date 8/19/88 Total Depth 340' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 40'

RECEIVED  
MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV  
DIST. 3

Type & amount of coke breeze used: N/A

Depths anodes placed: 320', 313', 296', 289', 282', 275', 260', 250', 215', 90'

Depths vent pipes placed: 345' OF 1" PVC VENT PIPE

Vent pipe perforations: BOTTOM 240'

Remarks: gb #3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

1 - 30-045-07318  
6 - 30-045-21041

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 21 Twp 28 Rng 8

Name of Well/Wells or Pipeline Serviced GRAMBLING A #1, #6

cps 470w

Elevation 5808' Completion Date 8/19/69 Total Depth 280' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. 60'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV.  
DIST. 3

Type & amount of coke breeze used: 5160 lbs.

Depths anodes placed: 261', 255', 241', 231', 216', 181', 161', 100'

Depths vent pipes placed: 261' OF 3/4" HOSE

Vent pipe perforations: 225'

Remarks: gb #2 PLASTIC MOLD USED TO CAP ANODES. DID NOT USE SHRINK SLEEVE ON CABLE.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

1-30-045-07318

6-30-045-21041

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 21 Twp 28 Rng 8

Name of Well/Wells or Pipeline Serviced GRAMBLING A #1, #6

cps 470w

Elevation 5808' Completion Date 3/30/64 Total Depth 320' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: 3625 lbs.

Depths anodes placed: 295', 289', 283', 277', 271'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: qb #1 RETIRED

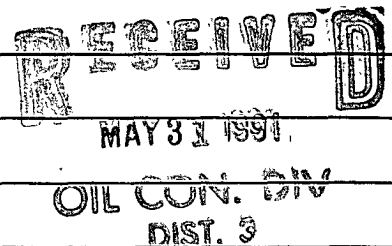

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.