

F

1472

30-045-24411

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit P Sec. 8 Twp 31 Rng 8

Name of Well/Wells or Pipeline Serviced OXNARD #3A

cps 6221w

Elevation N/A Completion Date 12/30/86 Total Depth 520' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 300'

Depths gas encountered: N/A

Type & amount of coke breeze used: 2400 lbs.

Depths anodes placed: 500', 480', 470', 440', 400', 390', 380', 370', 340', 330'

Depths vent pipes placed: 520'

Vent pipe perforations: 200'

Remarks: (gb #1)

RECEIVED
MAY 31 1991
CON. DIST.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☒ 6221W

Completion Date December 30, 1986


Well Name <u>Oxnard # 3-A</u>		Location <u>Union Texas Petroleum</u>	
Type & Size Bit Used		Work Order No.	
Anode Hole Depth <u>520'</u>	Total Drilling Rig Time <u>10</u>	Total Lbs. Coke Used <u>2400 #</u>	Lost Circulation Mat'l Used
No. Sacks Mud Used			
Anode Depth			
#1 <u>500</u>	#2 <u>480</u>	#3 <u>470</u>	#4 <u>440</u>
#5 <u>400</u>	#6 <u>390</u>	#7 <u>380</u>	#8 <u>370</u>
#9 <u>340</u>	#10 <u>330</u>		
Anode Output (Amps)			
#1 <u>1.8</u>	#2 <u>2.4</u>	#3 <u>3.2</u>	#4 <u>4.0</u>
#5 <u>3.9</u>	#6 <u>4.2</u>	#7 <u>2.3</u>	#8 <u>2.6</u>
#9 <u>3.9</u>	#10 <u>3.4</u>		
Anode Depth			
#11	#12	#13	#14
#15	#16	#17	#18
#19	#20		
Anode Output (Amps)			
#11	#12	#13	#14
#15	#16	#17	#18
#19	#20		
Total Circuit Resistance	No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts <u>12.1</u>	Amps <u>16.2</u>	Ohms <u>0.75</u>	<u>3550'</u>

Remarks: Had to fill hole w/water to log hole. Used 520' of 1" vent pipe w/ 200' of perforation.

All Construction Completed

Coody Mumbres
(Signature)

GROUND BED LAYOUT SKETCH

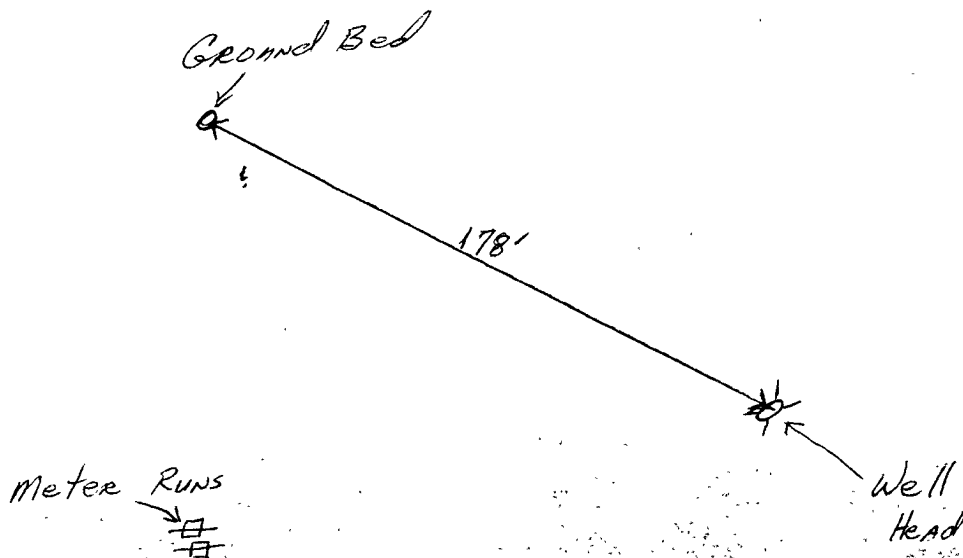

Aztec, New Mexico

COMPANY Union Texas Petroleum DAILY DRILLING REPORT December 30, 19 86

RANGE:

8

HOLE MADE:

520

DESCRIPTION OF FORMATION

COLOR

TSA

Copy.