

1536

E

#9E 30-045-26021

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit P Sec. 21 Twp 30 Rng 13Name of Well/Wells or Pipeline Serviced MC CORD #9E

cps 6558w

Elevation N/A Completion Date 12/27/86 Total Depth 320' Land Type* N/ACasing, Sizes, Types & Depths 80'If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 100'Depths gas encountered: N/AType & amount of coke breeze used: 1800 lbs.Depths anodes placed: 290', 280', 270', 260', 240', 230', 220', 195', 185', 175'Depths vent pipes placed: N/AVent pipe perforations: N/ARemarks: (gb #1)**RECEIVED**
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☐

Q5586

Completion Date 12-27-86


Well Name <i>McCord #9E</i>				Location <i>Vaion Texas Petroleum</i>				P <i>21 30 13</i>	
Type & Size Bit Used								Work Order No. <i>133</i>	
Anode Hole Depth <i>320</i>		Total Drilling Rig Time		Total Lbs. Coke Used <i>1800</i>		Lost Circulation Mat'l Used		No. Sacks Mud Used	
Anode Depth	#1 <i>290</i>	#2 <i>280</i>	#3 <i>270</i>	#4 <i>260</i>	#5 <i>240</i>	#6 <i>230</i>	#7 <i>220</i>	#8 <i>195</i>	
Anode Output (Amps)	#1 <i>5.48</i>	#2 <i>4.98</i>	#3 <i>4.60</i>	#4 <i>5.57</i>	#5 <i>4.96</i>	#6 <i>5.32</i>	#7 <i>5.87</i>	#8 <i>4.42</i>	
Anode Depth	#9 <i>185</i>	#10 <i>175</i>							
Anode Output (Amps)	#9 <i>5.41</i>	#10 <i>6.34</i>							
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	
Total Circuit Resistance					No. 8 C.P. Cable Used <i>2545'</i>				
Volts <i>13.2</i>	Amps <i>30.2</i>	Ohms <i>0.44</i>		No. 2 C.P. Cable Used					

Remarks: *Negative 186 feet*

All Construction Completed

John Smith
(Signature)

GROUND BED LAYOUT SKETCH

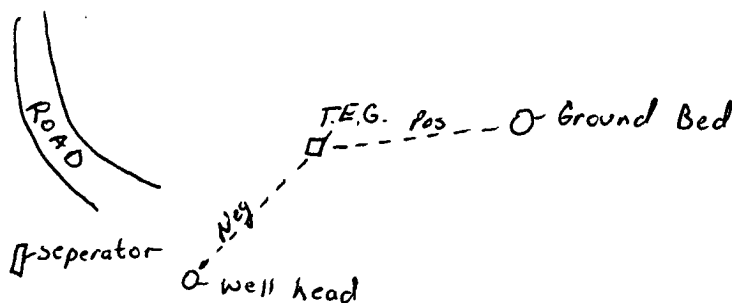

Aztec - New Mexico

DAILY DRILLING REPORT

December 27 1986

DESCRIPTION OF FORMATIONREMARKS:

Driller

Tool Dresser