

2701

C#4A 30-045-22500  
#1 30-045-20762

E-M

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICOOperator MERIDIAN OIL CO. Location: Unit C Sec. 12 Twp. 30 Rng. 10Name of Well/Wells or Pipeline Serviced Grambling C # 4 A & Stickle # 1  
cps 1229wElevation 6544' Completion Date 7/27/90 Total Depth 435 Land Type N/ACasing Strings, Sizes, Types & Depths 20 ft. 8" PVC CASINGIf Casing Strings are cemented, show amounts & types used N/A  
20 ft. PVCIf Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/ADepths & thickness of water zones with description of water: Fresh, Clear,  
Salty, Sulphur, Etc. Water at 50 ft.Depths gas encountered: N/AGround bed depth with type & amount of coke breeze used:  
405 ft. 2300 ft. of Ashbury Petroleum Coke used.Depths anodes placed: 400 ft. 390, 380, 370, 360, 350Depths vent pipes placed: 405 ft. 1" vent pipeVent pipe perforations: 345 ft. perforatedRemarks: gb #3RECEIVED  
MAY 31 1991  
OIL CON. DIV.  
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of logs, including Drillers Log, Water Analyses &amp; Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

E

2702

**DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO**

Operator MERIDIAN OIL CO. Location: Unit C Sec. 12 Twp. 30 Rng. 10

Name of Well/Wells or Pipeline Serviced Grambling C # 4 A & Stickle # 1

cps 1229w

Elevation 6544' Completion Date 7/27/90 Total Depth 460 Land Type N/A

Casing Strings, Sizes, Types & Depths Set 20 ft. 8" PVC CASING

If Casing Strings are cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

Cemented bottom 60 ft. and sealed off gas and water zone

Depths & thickness of water zones with description of water: Fresh, Clear

Salty, Sulphur, Etc. Water at 60 ft. got a sample

Depths gas encountered: Hit water and gas at 450 to 460

Ground bed depth with type & amount of coke breeze used:


2300 lbs of Ashbury Petroleum Coke

Depths anodes placed: 390, 380, 370, 360

Depths vent pipes placed: 400 ft.

Vent pipe perforations: Perforated 340 ft.

Remarks: gb #2

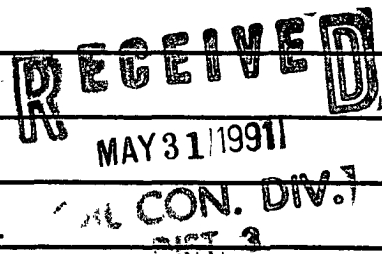

If any of the above data is unavailable, please indicate so. Copies of a logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

2703

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NW Sec. 12 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced GRAMBLING C #4A, STICKLE #1  
cps 1229w

Elevation 6544' Completion Date 6/21/78 Total Depth 480' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. 150' - 160'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 445', 435', 425', 415', 405', 395', 385', 375', 365', 355'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV.  
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.