

7 30-045- 10272

10 30-045- 20761

210 30-045- 26993

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit SW Sec. 29 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced ATLANTIC A #7, #10, #210

cps 2071w

Elevation 6034' Completion Date 5/29/63 Total Depth 220' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 2000 lbs.

Depths anodes placed: 190', 184', 178', 172', 166'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991

OIL CON. DIV

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.


WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

WELL NAME Atlantic No. 7-A ^{#7}
^{#10}
^{#210} DATE 5-29-63
LOCATION SW⁴ Sec. 29 T31N R10W CPS NO. 330-W 201
WORK ORDER NUMBER 184-40542-50-02
ANODE HOLE DEPTH 220'
TOTAL DRILLING RIG TIME 7 Hrs
DRILLING TIME FOR RECTIFIER POLE HOLE 0
TYPE AND SIZE BIT USED 6 1/4 Rock WM. 3483 X
NUMBER SACKS MUD USED 0
NUMBER SACKS LOST CIRCULATION MAT'L USED 0
ANODE DEPTHS #1 190, #2 184, #3 178, #4 172 #5 166
TOTAL LBS. COKE USED 1700 2000 [#] 20 Sacks
ANODE OUTPUTS 12.2 VOLTS, #1 4.9, #2 5.0, #3 5.4, #4 5.0 #5 4.5
TOTAL CIRCUIT RESISTANCE: VOLTS 11.4 AMPERES 10.5 OHMS 1.08
NUMBER FEET SURFACE CABLE CONDUIT 500

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static c/s .83 R 600 South
Good All Rectifier 28 V 12A Ser. # 62C6157
NOTE - Surface Cable & Anodes are No. 8 Solid Wire

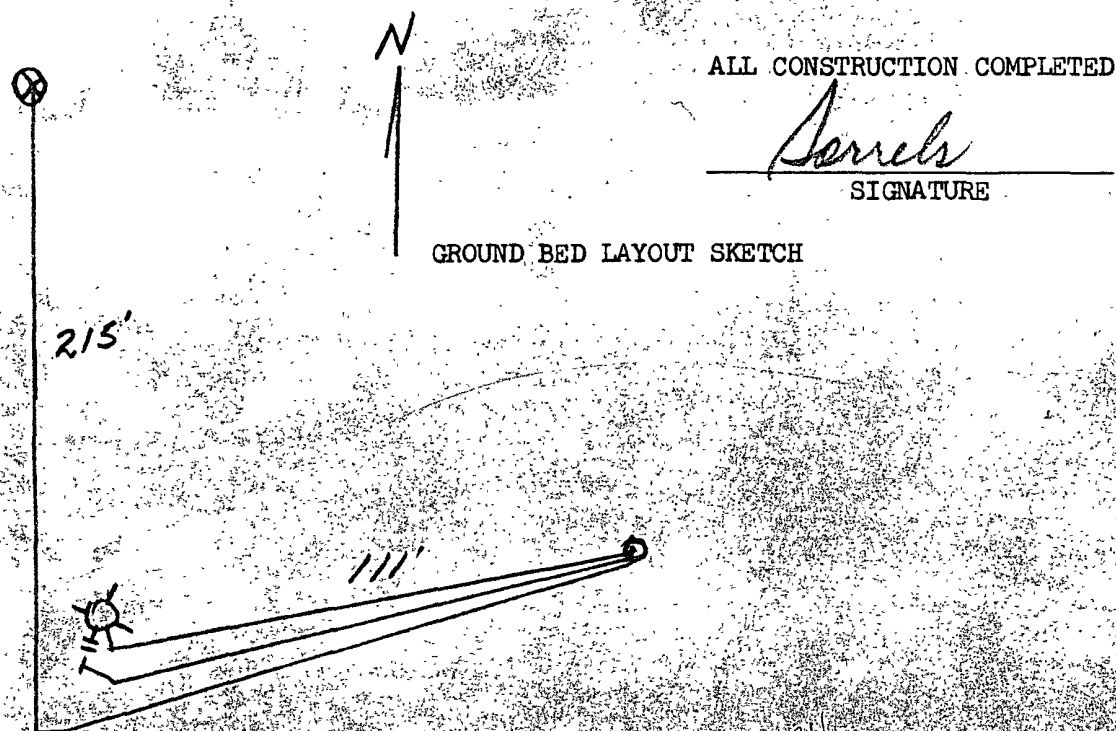

ORIGINAL & 1 COPY
ALL REPORTS

1573'

LEASE # 297500 R-104 WELLS NO

CONTRACTOR
E. Wilson

RIGNO.

REPORT

DATE 11-27 1963

MORNING

DAYLIGHT

EVENING

[illegible][illegible][illegible]

REMARKS

REMARKS

REMARKS

[illegible]

SIGNED: Toolpusher

Company Supervisor

D. H. Lawrence