### RECEIVED

Form 3160- 5

# **UNITED STATES**

JUN 0 5 2008

FORM APPROVED

(April 2004)	DEPARTMENT OF THE		Buneau of Land	l langacoment	OMB No. 1004- 0137
SUNDRY NOTICES AND REPORTS ON WELLS  Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.				lanagement Expires: March 31, 2007  5. Lease Serial No.  701-98-0013  6. If Indian, Allottee, or Tribe Name	
					rilla Apache Tribe
SUBMIT IN TRIPLICATE - Other Instructions on reverse side.				7. If Unit or CA	. Agreement Name and/or No.
1. Type of Well Oil Well  Other Other				8. Well Name and No.	
2. Name of Operator	Tmo			Jica 9. API Well No.	rilla 28-02-09 #23
Black Hills Gas Resources, Inc.  3a. Address  3b. Phone No. (include area code)				30-039-29319	
P.O. Box 249 Bloo				ol, or Exploratory Area	
4. Location of Well (Footage, Sec., T.	<del></del>			TC/Burro Can Tertiary	
Sec 9, T28N, R02W 1870' FNL & 1995' FEL Unit G				11. County or Parish, State	
					io Arriba, NM
<del></del>	PRIATE BOX(S) TO INDICAT			ORT, OR OTHE	R DATA
TYPE OF SUBMISSION	ISSION TYPE OF ACTION				
Notice of Intent	Acidize	Deepen	Production (	Start/ Resume)	Water Shut-off
	Altering Casing	Fracture Treat	Reclamation	1	Well Integrity
X Subsequent Report	Casing Repair	New Construction	Recomplete		Other
	Change Plans X	Plug and abandon	Temporarily	Abandon	
Trial At a day of the last	Convert to Injection	,			
Final Abandonment Notice  '13, Describe Proposed or Completed O		Plug back	Water Dispo		
Attach the Bond under which the w- following completion of the involve testing has been completed. Final A determined that the site is ready for	nally or recomplete horizontally, give su ork will performed or provide the Bond of d operations. If the operation results in a bandonment Notice shall be filed only a final inspection.)  ces has plugged and aband	No. on file with the BI multiple completion o fter all requirements, in	M/ BIA. Required sur recompletion in a ne acluding reclamantion	bsequent reports sha ew interval, a Form 3 , have been complete	Il be filed within 30 days 160-4 shall be filed once ed, and the operator has
		,			RCVD JUN 9'08
					OIL CONS. DIV.
					DIST. 3
14. I hereby certify that the foregoing is Name (Printed/ Typed)	true and correct.	<u> </u>			
	Loren Diede			Consultant (Agent)	
Signature	Date		4-Jun-08		
		1			

Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease Office

which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitiousor fraudulent statements or representations as to any matter within its jurisdiction.

Date

JUN U B ZUUB

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this

form and the number of copies to be submitted, particularly with regard to local area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from the local Federal office.

#### **SPECIFIC INSTRUCTIONS**

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13 - Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or

present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well and date well site conditioned for final inspection looking to approval of the abandonment.

#### NOTICE

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as requited by 43 CFR 3162.4-1(c); and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to

appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3 - 2, 3162.3 - 3, 3162.3 - 4.

The Paperwork Reduction Act of 1995 (44 U.S.C. 3501 et seq.) requires us to inform you that:

This information is being collected to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

BLM would like you to know that you do not have to respond to this or any other Federal agency -sponsored information collection unless it displays a currently valid OMB control number.

#### **BURDEN HOURS STATEMENT**

Public reporting burden for this form is estimated to average 25 minutes per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau information Collection Clearance Officer, (WO-630), Mail Stop 401 LS, 1849 C St., N.W., Washington D.C. 20240

## Jicarilla 28-02-09 #23 Actual P&A

**Basin Fruitland Coal / Burro Canyon Tertiary** 

1870' FNL & 1995' FEL, NE, Section 9, T-28-N, R-2-W

Today's Date: 5-16-08

Spud: 1/24/05 Completed: 3/05/05

Elevation: 7331' GI

7343' KB

San Jose @ 13'

Nacimiento @ 2188'

Ojo Alamo @ 3257'


Kirtland @ 3586'

Fruitland @ 3640'

Pictured Cliffs @ 3694'

7.875" hole

12.25" hole

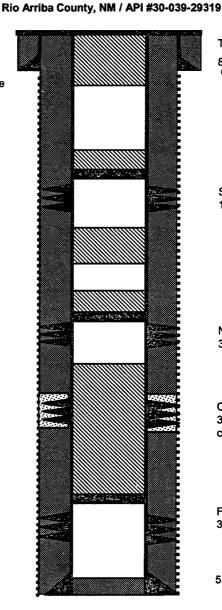

TD 3875' PBTD 3836'

Top out 20 sx, set marker,.

TOC @ surface (CBL 2005)

8.625" 24#, J-55 Casing set @ 276' Cement with 275 sxs (Circulated to Surface)

Plug #5: 348' - 0'
Type G cement, 48 sx.
55.2 cu ft
Plug #4: 1297' - 1143'
Type G cement, 18 sx,
20.7 cu ft.

Set CR @ 1297'

San Jose Perforations: 1346' – 1350'

Plug #3: 2278' - 2138' Type G cement, 19 sx, 21.85 cu ft. Tagged TOC. Plug #2: 3037' - 2920' Type G cement, 19 sx, 21.85 cu ft. Tagged TOC

Nacimiento Perforations: 3074' – 3195'

Set CR @ 3037'

Ojo Alamo Perforations: 3268' – 3551',sqz w/125'sxs cement during completion

> Plug #1: 3594' - 3164' Type G cement, 55 sx, 64 cu ft. Tagged TOC. Set CR @ 3594'

Fruitland Coal Perforations: 3644' – 3680'

5.5" 15.5#, Casing set @ 3861' Cemented with 680 sxs Circ 20 bbls to surface