District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office. Santa Fe, NM 87505

Pit, Closed-Loop System, Below-Grade Tank, or								
Proposed Alternative Method Permit or Closure Plan Application								
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,								
below-grade tank, or proposed alternative method	pit, closed-loop system,							
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade	tank or alternative request							
ease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surfavironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental author	ace water, ground water or the rity's rules, regulations or ordinances.							
Departor: _CDX Gas LLC OGRID #:222374								
Address:2700 Farmington Ave, Building K, Suite #1								
Facility or well name:Jicarilla Contract 155 #020E								
API Number:30-039-22344 OCD Permit Number:								
U/L or Qtr/QtrCSection29 Township26NRange5WCounty:	Rio Arriba							
Center of Proposed Design: Latitude36.4629 Longitude107.38647	NAD: □1927 ☒ 1983							
Surface Owner: Federal State Private Tribal Trust or Indian Allotment								
2.								
□ <u>Pit</u> : Subsection F or G of 19.15.17.11 NMAC Temporary: □ Drilling □ Workover	RCVD SEP 12 '08 OIL CONS. DIV.							
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A	DIST. 3							
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other								
☐ String-Reinforced								
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L	x W x D							
3.								
Closed-loop System: Subsection H of 19.15.17.11 NMAC								
Type of Operation: 🔲 P&A 🔲 Drilling a new well 🔲 Workover or Drilling (Applies to activities which require prior a intent)	approval of a permit or notice of							
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other								
Lined Unlined LINET type: Thickness mil LLDPE HDPE PVC Other								
Liner Seams: Welded Factory Other								
■ Below-grade tank: Subsection I of 19.15.17.11 NMAC								
Volume: Tank #2 7 95 bbl Type of fluid: Produced water								
Tank Construction material:Fiberglass Reinforce Plastic								
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off								
☐ Visible sidewalls and liner ☑ Visible sidewalls only ☑ OtherSee closure plan								
Liner type: Thicknessmil	w rule							
<u> </u>								
Alternative Method:								

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Feecing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	hospital,
Alternate. Please specify_Four foot hog wire	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
8.	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approoffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ⊠ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ⊠ No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached. ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.19 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15.
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.I Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.							
Disposal Facility Name: Disposal Facility Permit Number:							
Disposal Facility Name: Disposal Facility Permit Number:							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future services and Yes (If yes, please provide the information below) No	vice and operations?						
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	C						
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate dist. considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justi demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be						
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No						
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No						
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes No						
Within a 100-year floodplain FEMA map	Yes No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC							

Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print):Lee Gardner Title:HSE Coordinator
Signature: Les Berrelles . Date: 3-29-89
e-mail address:lee.gardner@cdxgas.com Telephone:505-324-5427
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Branslow Och Approval Date: 2-2-09
Title: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
Closure Completion Date:
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain.
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Yes (If yes, please demonstrate compliance to the items below) No
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
24. Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)
On-site Closure Location: Latitude Longitude NAD: \[\] 1927 \[\] 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan. Name (Print):
Signature: Date:
e-mail address: Telephone:



Hydrogeological Report Jicarilla 155 #20E Peter Kondrat

CDX Gas, LLC Tapicito Project Jicarilla Apache Nation, San Juan Basin

Jicarilla Contract 155 #020E

Below Grade Tank

Well API: 30-039-22344

TWP: 26 N - Range: 5 W - Sec. 29; 810 FNL 1700 FWL

Siting Criteria Compliance

- For Ground water is <u>not</u> less than 50 feet below the bottom the subject location
- The subject location is <u>not</u> within 300 feet of a continuously flowing watercourse.
- The subject location is <u>not</u> within 200 feet of any significant watercourse, lakebed, sinkhole or playa lake
- The subject location is <u>not</u> within 300 feet of a known permanent residence, school, hospital, institution or church
- The subject location is <u>not</u> within 500 feet of any known private domestic fresh water well or 1000 feet of any other fresh water well spring
- > The subject location is not within any known incorporated municipal boundary
- The subject location is <u>not</u> within 500 feet of a known wetland
- > The subject location is not within a known unstable area
- The subject location is <u>not</u> within a known 100 year flood plain
- The subject location is not over any known subsurface or surface mine

Regional Geologic Setting

At CDX's Tapicito Project located in the eastern-central portion of the San Juan Basin, within the Jicarilla Apache Indian Nation, the San Jose Formation outcrops and forms the surface landscape.

The San Jose Formation outcrops in the eastern-northeastern portion and covers ~1/6th of the San Juan Structural Basin. The San Jose Formation overlies the Nacimiento Formation in the area generally south of the CO-NM state line, and overlies the Animas Formation in the area generally north of the CO-NM state line (Fassett, 1974, p. 229). The basal contact of the San Jose varies with location in the basin. This contact is a disconformity along the basin margins, and it is an angular unconformity along the Naciemento Uplift; the contact is conformable in the central basin (Baltz, 1967, p. 54; Fassett, 1974 p. 229).

The Eocene-aged San Jose Formation was deposited in various fluvial-type environments (Baltz, 1967, p 44-45) and consists of interbedded sequence of sandstone, siltstone and shale. The sandstone are buff to yellow and rusty-colored, crossbedded, very fine to coarse-grained arkose, which are locally conglomeratic and contain abundant silicified wood (Baltz, 1967, p. 46; Fassett, 1974, p 229; Anerholm, 1979, p. 23).

CDX GAS

Hydrogeological Report Jicarilla 155 #20E Peter Kondrat

Thickness of the San Jose Formation generally increases from west to east. Fassett (1974, p 229) reported a maximum thickness if 2,400 feet in the east-central part of the basin, and Stone and other (1983, p. 25) reported a range of from about 200 feet in the west and south to almost 2,700 feet in the center of the structural basin.



New Mexico State Land Office

Oil, Gas, and Minerals Land/Lease Information Map

0 0 0250.05

Universal Transverse Mercator Projection, Zone 13 1983 North American Datum

The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer.

> Land Office Geographic Information Center logic@slo state nm us

> > Created On: 8/22/2008 8:58:42 AM



LEGEND

- County Seats
- # SLO District Offices
- (((City, Town or Village
- k Volcanic Vents

NMOCD Oil, Gas Wells

- ☼ Carbon Dioxide
- ☆ Gas
- o Injection
- o Miscellaneous
- Oil
- Δ Salt Water Disposal
- ♦ Water
- ♦ DA or PA •

Federal Subsurface Ownership

All Minerals

Coal Only

Oil and Gas Only

Oil, Gas and Coal Only

Other Minerals

State Trust Lands Ownership

Surface Estate . Subsurface Estate

Both Estates

State Lease Types

Commercial Leases

Minerals Leases

Oil and Gas Leases

Agricultural Leases

Oil, Gas Leasing

Influenced By Restriction

Not Available for Oil, Gas Leasing

Other Boundaries


Continental Divide

State Boundary

County Boundaries Oil and Gas Unit Boundary

Geologic Regions

For detailed legend of the Geologic Map of New Mexico. Please see http://geoinfo.nmt.edu/

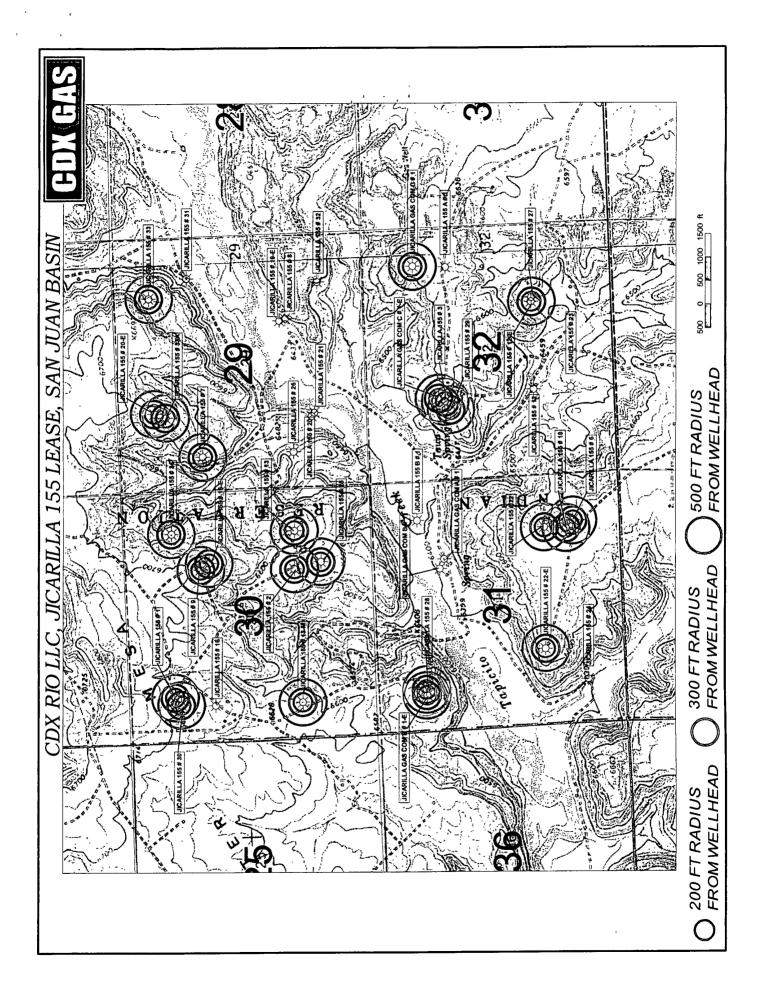



Hydrogeological Report Jicarilla 155 #20E Peter Kondrat

Ground Water Data, Water Well Locations

Hydraulic Properties: Levings and Others (1990) reported well yields from 79 water wells completed in the San Jose, Nacimiento and Animas Formations ranged from 1 to 61 gallons per minute and median is 6 gallons per minute. Transmissivity data for the San Jose, Nacimiento and Animas Formations are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone and Others, 1983, table 5). The San Jose, Nacimiento and Animas Formations are a source of water for public supply, commercial, private-domestic and livestock use in areas where drilling depths and pumping levels are economically feasible and where water quality is suitable.

The San Jose, Nacimiento and Animas Formations are all hydrologically similar because sands in all units produce approximately the same quantities of water. The great percentage of fine material in all may restrict the downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented material is highly erodible, forms a badland terrain and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

iWaters Database: The search showed no reported wells with groundwater information in the **T26N-R5W**. Attached are the results for the three query engines: 1) POD/Surface Data Report, 2) Avg Depth to Water Report, 3) Water Column Report

- For Ground water is not less than 50 feet below the bottom the subject location
- No known private water wells are within 500 feet of the subject location
- No known public water wells are within 1000 feet of the subject location
- No water wells around the subject area are listed in the iWaters Database

New Mexico Office of the State Engineer POD Reports and Downloads

	Towr	ship: 26N	Range: 05W	Sections:			
	NAD27	X:	Y:	Zone:	Search R	adius:	
	County:	图 Bas	in:	K	Number:	Suffix:	
	Owner Name: (Fir	st)	(Last	(1)	_ ○Non-Dom	estic ODomestic	⊚ All .
	POD / Surfac	e Data Repo	ort A	vg Depth to Water	Report	Water Column Report	··
		,	Clear Form	iWATERS Me	nu Help		<i>:</i>
		WAT	ER COLUMN REI	PORT 08/26/2008	3		,.
POD Number	(quarters are (quarters are Tws Rng	biggest	to smallest)		Depth Depth Well Water	Water (in feet) Column	•
No Records f	found, try again						

New Mexico Office of the State Engineer POD Reports and Downloads

Tow	nship:	26N Range	05W	Sections	:					
NAD27	X:	Y:		Zone:			Search Radiu	ıs:		
County:		Basin:			CE	Numb	ber:	Suffix:		
Owner Name: (Fi	st)	فروس والإثار بالشافلان الاستان المافلات الاستان بين والإنتجابات	(Last)		<u> </u>		Non-Domestic	Domestic	⊚ All	
POD / Surfac	e Data	a Report	Avg D	epth to V	Vater I	Report	Wat	ter Column Repo		
		Clear F	Form _	iWATER	S Mer	nu [Help			

AVERAGE DEPTH OF WATER REPORT 08/26/2008

Bsn Tws Rng Sec Zone X Y Wells Min Max Avg

No Records found, try again

New Mexico Office of the State Engineer POD Reports and Downloads

	Town	nship: 26N	Range: 05W	Sections:	the state of the s			
	NAD27	X:	Y:	Zone:	Search :	Radius:		
-	County:	∄ Ba	sin:	(4) (4)	Number:	Suffix:		
	Owner Name: (Fir	est)	(Last)		○ Non-Dor	nestic ODomestic	: ⊚ A11	•
	POD / Surfac	ce Data Rep	ort A	vg Depth to Water	Report	Water Column Repo	ort	
•			Clear Form	iWATERS Me	enu Help			
					/0.5 /0.00		,:	-
	(acre ft per	POI annum)) / SURFACE DA	TA REPORT 08	/26/2008	(quarters are		
DB File Nbr SJ 01098	Use Diversi	on Owner	PRODUCTION C		POD Number SJ 01098	Source		ec q q q

Record Count: 1

New Mexico Office of the State Engineer Water Right Summary

Back

DB File Nbr: SJ 01098

Primary Purpose: OIL OIL PRODUCTION

Primary Status: PMT Permit

Total Acres: 0
Total Diversion: 15

Owner: AMOCO PRODUCTION COMPANY

Documents on File

Doc File/Act Status 1 2 3 Trans Desc From/To Acres Diversion Consumptive

®A₽

APPRO 03/13/1980 PMT APR PRC SJ 01098

T 0 15

Point of Diversion POD Number SJ 01098 (qtr are 1=NW 2=NE 3=SW 4=SE)
(qtr are biggest to smallest X Y Source Tws Rng Sec q q Q Zone
26N 05W 31 2 3 2

X Y are in Feet UTM are in Meters)
Zone X Y UTM_Zone Easting No.

TM_Zone Easting Northing 13 285102 4036094 •

Priority Status Acres Diversion POD Number Source 12/06/1979 PMT 0 15 SJ 01098

(quarters are 1=NW 2=NE 3=SW 4=SE)

Place of Use

(quarters are biggest to smallest

Tws Rng Sec q q q q Acres Diversion Consumptive Use Priority Status Other Location Description
26N 05W 31 0 15 OIL PMT PLACE OF USE WILL BE AT DIFFER



Below Grade Tank Management Plan

I. Siting Criteria

- 1. No below grade tank may be located where:
 - a. Ground water is less than 50 feet below the bottom of the temporary pit or below grade tank.
 - b. Within 300 feet of a continuously flowing watercourse
 - c. Within 200 feet of any significant watercourse, lakebed, sinkhole or playa lake
 - d. Within 300 feet from a permanent residence, school, hospital, institution or church
 - e. Within 500 feet of a private domestic fresh water well or spring used by less than five households for domestic or stock watering purposes or within 1000 feet of any other fresh water well spring.
 - f. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3 as amended, unless the municipality specifically approves
 - g. Within 500 feet of a wetland
 - h. Within an unstable area
 - i. Within a 100 year flood plain
 - j. Over or near any known or suspected mined area
- 2. If ground water is an issue, the tank shall be placed above ground in a lined berm.
- 3. All excavated material will be stored at least 300 feet from any continuous flowing water and 200 feet away from any other water way.

II. Construction:

- 1. After June 16, 2008 any below grade tank replacement will use only steel double walled, double bottom tanks with a leak detection system.
- 2. The below grade tank pit bottom shall be free on any rocks, debris, sharp edges, or irregularities
- 3. Prior to the installation of any tank, the soil shall be sampled for
 - a. Chlorides
 - b. Benzene, toluene, ethyl benzene, and xylene
 - c. Benzene
 - d. Total petroleum hydrocarbons.
- 4. A fence meeting one of the following requirements shall be erected around the tank site consisting of:
 - a. Four strands of barbed wire placed on a pole between one and four feet

- b. A chain link fence six feet tall and topped with at least two strands of barbed wire when the temporary pit is within 1000 feet of a residence, school, hospital, institution or church. The fence shall have a gate which is locked when responsible personnel are not on-site.
- c. Oil Conservation Division approved alternative

 Note: CDX Gas uses Jicarilla Apache Tribal approved hog wire with a
 barbed wire top
- 5. Any open top tank shall be covered with netting, expanded metal, or "chicken wire" to prevent wildlife from entering the tank.
- 6. Any tank area shall be bermed to prevent the run on of water.

III. Operations and Maintenance:

- 1. All tanks and existing pits shall be inspected each month as a part of the Spill Prevention Control and Countermeasure facility inspection.
- 2. The inspection shall be documented on the Spill Prevention Control and Countermeasures Plan inspection form and maintained for at least five years.
- 3. All sides of the below grade tanks existing before June 16, 2008 shall be visible.
- 4. Any dirt or debris shall be noted on the inspection form and removed promptly.
- 5. Any oil visible on the surface of the fluid in the below grade tank shall be promptly removed.
- 6. Absorbent materials shall be maintained on site for this purpose.
- 7. Each below grade tanks shall have enough free board to prevent overflowing.
- 8. Any spillage or leak shall be reported to the Oil Conservation Division with in 48 hours of detection.
- 9. Any produced waste shall be disposed at either:
 - a. Basin Disposal (permit number NM-01-005)
 - b. Aquamoss (permit number SWD-1034A)

IV. Closure:

- 1. Current configuration consists of one single walled steel tank and one fiberglass reinforced plastic tank. Neither tank meet 19.15.17 NMAC. The tanks will be replaced with steel, double walled, double bottomed tanks having a leak detection system by June 16 2013.
- 2. The tanks shall be recycled, reused, reclaimed or disposed of in an Oil Conservation Division approved manner.
- 3. Any existing below grade tank which does not show integrity shall be immediately removed from service.
- 4. The soil under a pit shall be sampled for:
 - a. Benzene as determined by Environmental Protection Agency SW-846 method 8012B or 8260B or other Environmental Protection Agency method that the Oil conservation Division approves. The test shall not exceed 0.2 mg/kg.
 - b. Total Petroleum Hydrocarbons as determined by the Environmental Protection Agency SW-846 method 8021B or 8260B or other

418-1

- Environmental Protection Agency method that the Oil Conservation Division approves. The test shall not exceed 100 mg/kg.
- c. Total Benzene, Toluene, Ethyl Benzene, and Xylene as determined by Environmental Protection Agency SW-846 method 8021B or 8260B or other Environmental Protection Agency method that the Oil Conservation Division approves. The test shall not exceed 50 mg/kg.
- d. Chlorides as determined by Environmental Protection Agency method 300.1. The test shall not exceed 250mg/kg or background concentration, whichever is greater.
- 5. If contaminated soil is found under the pit, the soil will be removed and transported to either:
 - a. TNT land farm (permit number NM-01-0008)
 - b. Industrial Ecosystems Landfarm (permit number NM 01-0010B)
- 6. Any produced sludge shall be disposed of at either:
 - a. Basin Disposal (permit number NM-01-005)
 - b. Aquamoss (permit number SWD-1034A)
- 7. Any equipment associated with the removed below grade tank shall be removed unless needed for some other purpose.
- 8. Upon permanent closure of the below grade tank location:
 - a. Notify the land owner in writing by certified mail, return receipt requested, of the closure.
 - b. Notify the Oil Conservation Division at least 72 hours but not more than one week in advance of the closure.
 - c. Submit a closure report to the Oil Conservation Division with in 60 days.

V. Site Reclamation

A. Contouring:

- 1. The site shall be contoured to blend in with the surrounding terrain.
- 2. The soil cover shall consist of the background thickness of topsoil or one foot of suitable material for establishing vegetation at the site, which ever is greater.
- 3. The soil shall be spread in such a manner as to prevent the pooling of water.

B. Reseeding:

- 1. The area shall be reseeded at the first growing season after the completion of all work.
- 2. The seed mixture shall consist of three native plant species including one grass or Jicarilla Apache Tribal approved seed mix.
- 3. The seed mixture shall be drilled on the contour whenever practical.
- 4. At least 70 percent of the native perennial vegetative cover (unimpacted by overgrazing, fire, or other intrusive damage) shall be maintained through two successive growing seasons. Irrigation may not be used to accomplish the required ground cover.