


DOWNHOLE WELL PROFILE REPORT

ConocoPhillips

Well Name: SAN JUAN 29-5 UNIT #6N

API / UWI 3003930560	Surface Legal Location 027-029N-005W-C	Field Name MV/DK COM	License No	State/Province NEW MEXICO	Well Configuration Type VERTICAL
Ground Elevation (ft) 6,722.00	Original KB/RT Elevation (ft) 6,737.00	KB-Ground Distance (ft) 15.00	KB-Casing Flange Distance (ft)	KB-Tubing Hanger Distance (ft)	

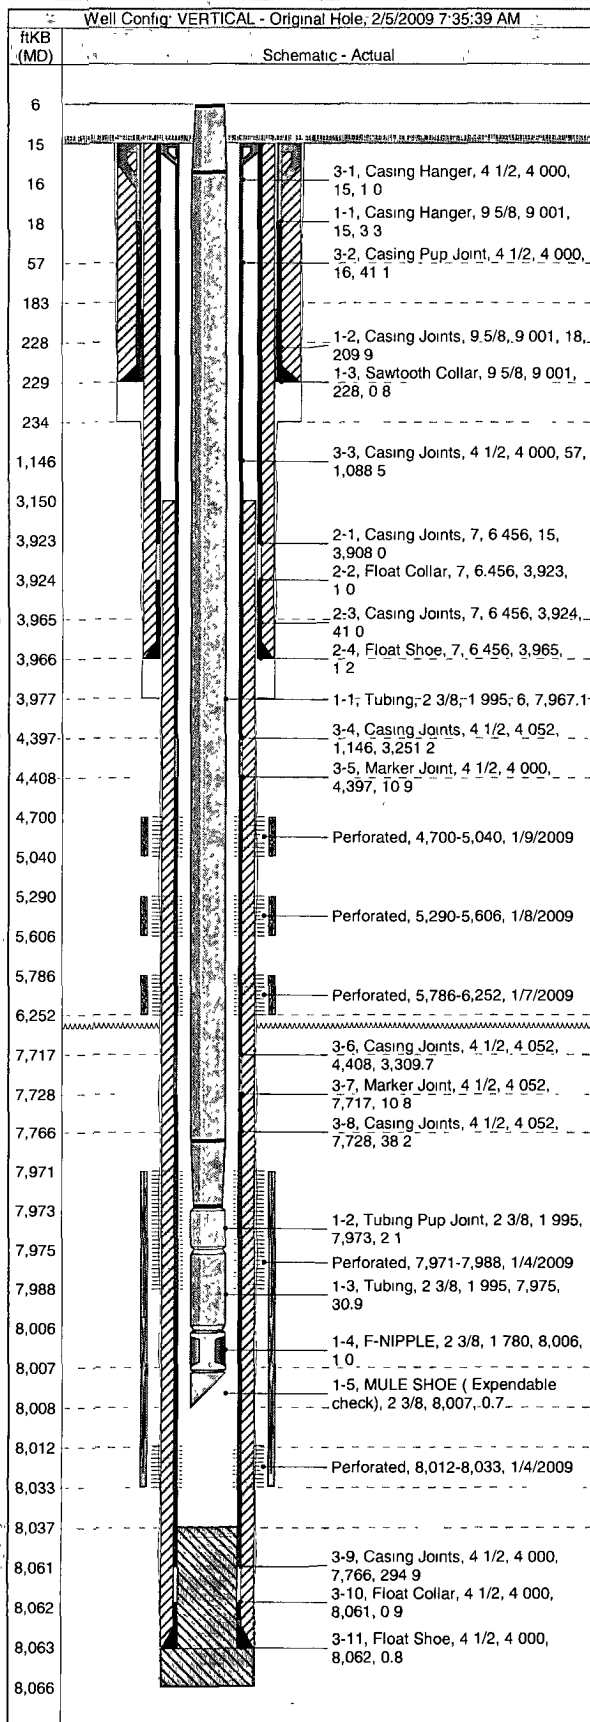

Wellheads

<Type?>, CAMERON on <Install Date?>

Type

Wellhead Components

Description	Make	WP (psi)	Service	Top WP (psi)	Top Ring Gasket	Min Bore (in)
	CAMERON	5,00...		5,000.0	R-46	7.062

Casing Strings

Surface, 229ftKB

Casing Description	Run Date	Set Depth (ftKB)	Length (ft)
Surface	11/18/2008	229	214.00

Item Description	Jts	OD Nominal (in)	ID (in)	Wt (lbs/ft)	Grade	Top Thread	Len (ft)	Model
Casing Hanger	1	9 5/8	9.001	32.30	H-40	ST&C	3.28	
Casing Joints	7	9 5/8	9.001	32.30	H-40	ST&C	209.87	
Sawtooth Collar	1	9 5/8	9.001	32.30	H-40	ST&C	0.85	

Intermediate, 3,966ftKB

Casing Description	Run Date	Set Depth (ftKB)	Length (ft)
Intermediate	12/1/2008	3,966	3,951.25

Item Description	Jts	OD Nominal (in)	ID (in)	Wt (lbs/ft)	Grade	Top Thread	Len (ft)	Model
Casing Joints	96	7	6.456	20.00	J-55	ST&C	3,908.03	
Float Collar	1	7	6.456	20.00	J-55	ST&C	1.00	
Casing Joints	1	7	6.456	20.00	J-55	ST&C	41.04	
Float Shoe	1	7	6.456	20.00	J-55	ST&C	1.18	

Production, 8,063ftKB

Casing Description	Run Date	Set Depth (ftKB)	Length (ft)
Production	12/6/2008	8,063	8,048.07

Item Description	Jts	OD Nominal (in)	ID (in)	Wt (lbs/ft)	Grade	Top Thread	Len (ft)	Model
Casing Hanger	1	4 1/2	4.000	11.60	J-55	LT&C	1.00	
Casing Pup Joint	4	4 1/2	4.000	11.60	J-55	LT&C	41.07	
Casing Joints	26	4 1/2	4.000	11.60	J-55	LT&C	1,088.54	
Casing Joints	79	4 1/2	4.052	10.50	J-55	ST&C	3,251.19	
Marker Joint	1	4 1/2	4.000	11.60	J-55	LT&C	10.85	
Casing Joints	81	4 1/2	4.052	10.50	J-55	ST&C	3,309.67	
Marker Joint	1	4 1/2	4.052	10.50	J-55	ST&C	10.84	
Casing Joints	1	4 1/2	4.052	10.50	J-55	ST&C	38.22	
Casing Joints	7	4 1/2	4.000	11.60	J-55	LT&C	294.92	
Float Collar	1	4 1/2	4.000	11.60	J-55	LT&C	0.92	
Float Shoe	1	4 1/2	4.000	11.60	J-55	LT&C	0.85	

Tubing - Production set at 8,008ftKB on 1/26/2009 15:00

Tubing Description	Run Date	Set Depth (ftKB)	String Length (ft)
Tubing - Production	1/26/2009	8,008	8,001.80

Item Description	Jts	OD Nominal (in)	Wt (lbs/ft)	Grade	Top Thread	Len (ft)	Model
Tubing	259	2 3/8	4.70	J-55		7,967.10	T&C Upset
Tubing Pup Joint	1	2 3/8	4.70	J-55		2.10	T&C Upset
Tubing	1	2 3/8	4.70	J-55		30.90	T&C Upset
F-NIPPLE	1	2 3/8				1.00	
MULE SHOE (Expendable check)	1	2 3/8				0.70	

Other Strings

String Description		Run Date		Set Depth (ft)		Pull Date		Pull Reason	
Item Description	Jts	OD (in)	ID (in)	Wt (lbs/ft)	Grade	Top Thread	Len (ft)		Model

Other In Hole

Description	Run Date	Pull Date	Top (ftKB)	Btn (ftKB)	OD (in)	ID (in)
Bridge Plug - Temporary	1/7/2009	1/19/2009	6,380	6,382	3.66	
Bridge Plug - Temporary	1/8/2009	1/15/2009	5,660	5,662	3.66	

Report Printed: 2/5/2009