


Current Schematic

ConocoPhillips

Well Name: GALT #1R

API/URN 3004529558	Surface Legal Location	Field Name	License No	State/Province NEW MEXICO	Well Configuration Type	Edit
Ground Elevation (ft) 6,415.00	Original K&RT Elevation (ft) 6,425.00	KG-Grind Distance (ft) 10.00	KG-Casing Flange Distance (ft) 6,425.00	KG-Tubing Hanger Distance (ft) 6,425.00		

Well Config - 30045295580000, 6/10/2009 3 04:38 PM

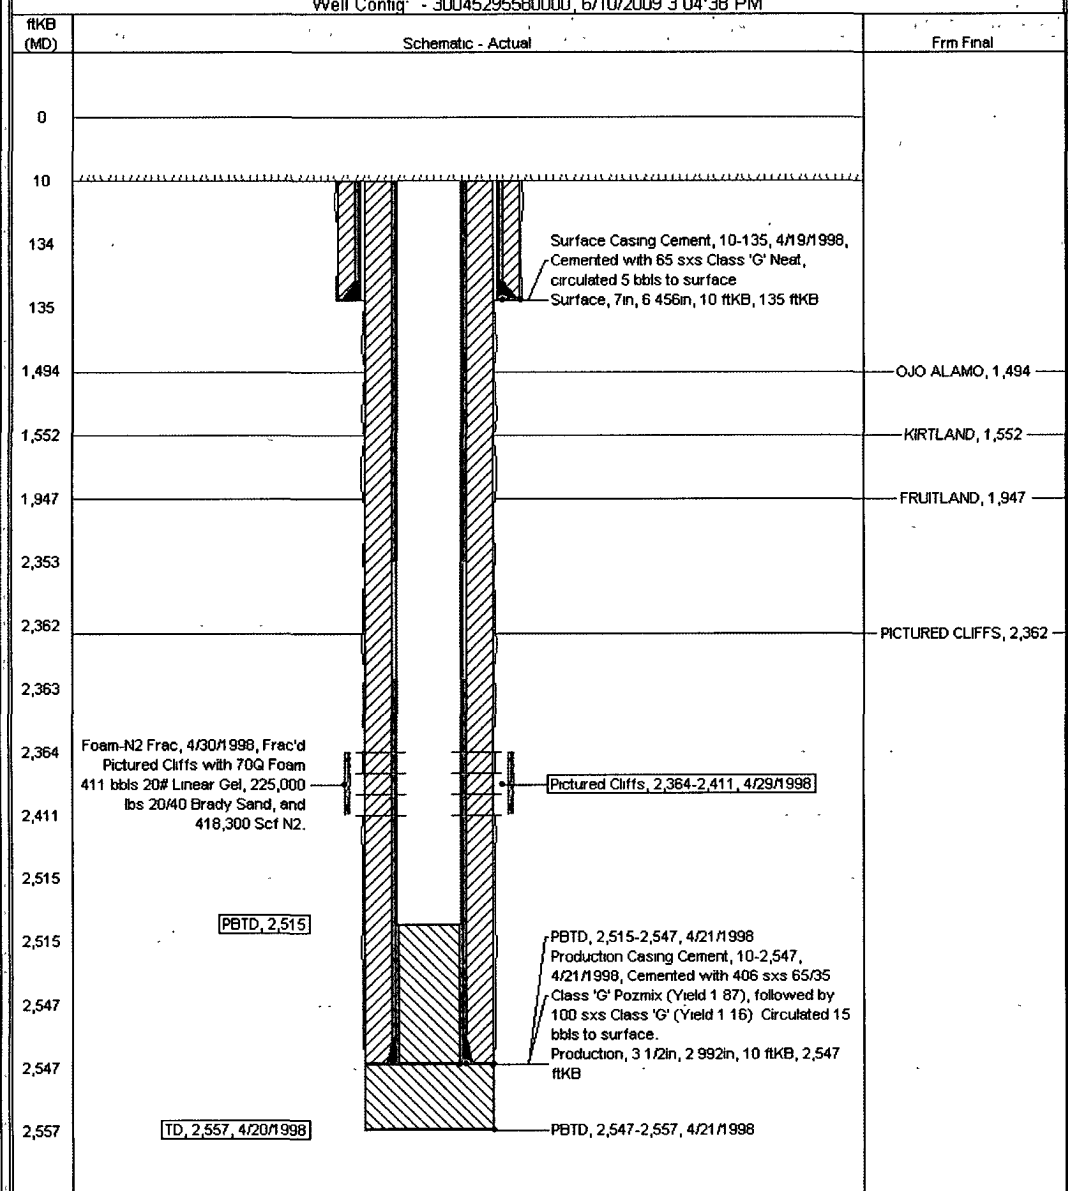

60

Pertinent Data Sheet

ConocoPhillips

Well Name: GALT #1R

API/UNW	State Legal Location	Field Name	License No	State/Province	Well Completion Type	Edit
3004529558				NEW MEXICO		
Ground Elevation (ft)	Original K&NT Elevation (ft)	K&NT-Ground Distance (ft)	K&NT-Casing Flange Distance (ft)	K&NT-Tubing Hanger Distance (ft)		
6,415.00	6,425.00	10.00	6,425.00	6,425.00		
Original Spd Date	Latitude (DMS)	Longitude (DMS)				Edit
4/18/1998	36° 35' 56.508" N	107° 50' 29.4" W				
PBTDs						
Depth (m-ft)	Comment					Edit
2,515.0						
Formations						
Formation Name					Final Top MD (m-ft)	Edit
OJO ALAMO					1,494.0	
KIRTLAND					1,552.0	
KIRTLAND					1,947.0	
PICTURED CLIFFS					2,362.0	
Casing Strings						
Casing Description	Ris Date	Set Depth (m-ft)	Comment			Edit
Surface	4/18/1998	135.3				
Item Description	OD Nominal (in)	ID (in)	WT (lb/ft)	Grade	J's	Let (ft)
Casing Joints	7	6.456	20.00	J-55	3	124.35
Guide Shoe	7	6.456	20.00	J-55	1	1.00
Casing Description	Ris Date	Set Depth (m-ft)	Comment			Edit
Production	4/19/1998	2,547.2				
Item Description	OD Nominal (in)	ID (in)	WT (lb/ft)	Grade	J's	Let (ft)
Casing Joints	3 1/2	2.992	9.30	J-55	75	2,343.09
Marker Joint	3 1/2	2.992	9.30	J-55	1	9.62
Casing Joints	3 1/2	2.992	9.30	J-55	5	152.05
Shoe Joint	3 1/2	2.992	9.30	J-55	1	31.70
Shoe	3 1/2	2.992	9.30	J-55	1	0.75
Cement						
Description	Start Date	End Date	Comment			Edit
Surface Casing Cement	4/19/1998		Cemented with 65 sxs Class 'G' Neat, circulated 5 bbls to surface			
Plugback	4/21/1998		Cemented with 406 sxs 65/35 Class 'G' Pozmix (Yield 1.87), followed by 100 sxs Class 'G' (Yield 1.16) Circulated 15 bbls to surface.			
Production Casing Cement	4/21/1998					
Tubing Description	Ris Date	Set Depth (m-ft)	Comment			Edit
Perforations						
Date	Top (m-ft)	Bot (m-ft)	Zone	Comment		
4/29/1998	2,364.0	2,411.0	PICTURED CLIFFS, 30045295580000	Perf'd Upper Pictured Cliffs @ 2364'- 2387' (7 holes) and the Lower Pictured Cliffs @ 2391'- 2411' (8 holes)		
Stimulations & Treatments						
Foam-N2 Frac on 4/30/1998 00:00						
Type	Zone	Comment				
Foam-N2 Frac	PICTURED CLIFFS, 30045295580000	Frac'd Pictured Cliffs with 70Q Foam 411 bbls 20# Linear Gel, 225,000 lbs 20/40 Brady Sand, and 418,300 Scf N2				
Logs						
Date	Type					Edit
4/20/1998	Array Induction					
4/20/1998	Neutron Porosity Litho-Density					
4/29/1998	Perforating Depth Control					