

District I

P.O. Box 1960, Hobbs, NM

District II

P.O. Drawer DD, Aztec, NM 87410

District III

1000 Rio Brazos Rd., Aztec, NM 87410

State of New Mexico

Energy, Minerals and Natural Resources Department

SUBMIT 1 COPY TO

APPROPRIATE

DISTRICT OFFICE

AND 1 COPY TO

SANTA FE OFFICE

DEPUTY OIL & GAS INSPECTOR

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

OCT 20 1999

PIT REMEDIATION AND CLOSURE REPORT

RECEIVED
OCT 20 1999

OIL CON. DIV.
DIST. 3

Operator: WOODSLEY / NMOCD Telephone: (505) 334-6178

Address: 1000 RIO BRAZOS - AZTEC - NM 87410

Facility or: STATE No. 1
Well Name

Location: Unit or Qtr/Qtr Sec D Sec 16 T 19N R 6W County MCKINLEY

Pit Type: Separator Dehydrator Other TANK DRAIN

Land Type: BLM , State X, Fee , Other

Pit Location: Pit dimensions: length 18, width 12, depth 6
(Attach diagram)

Reference: wellhead X, other

Footage from reference: 110

Direction from reference: 54 Degrees X East North X
of
 West South

Depth To Ground Water:

(Vertical distance from
contaminants to seasonal
high water elevation of
ground water)

Less than 50 feet (20 points)
50 feet to 99 feet (10 points)
Greater than 100 feet (0 Points) 0

Wellhead Protection Area:

(Less than 200 feet from a private
domestic water source, or; less than
1000 feet from all other water sources)

Yes (20 points)
No (0 points) 0

Distance To Surface Water:

(Horizontal distance to perennial
lakes, ponds, rivers, streams, creeks,
irrigation canals and ditches)

Less than 200 feet (20 points)
200 feet to 1000 feet (10 points)
Greater than 1000 feet (0 points) 0

RANKING SCORE (TOTAL POINTS): 0

JEFFREY C. BLAGG
NMPE 11607

CLIENT: <u>NMOCED</u> <u>A-PLUS</u>	BLAGG ENGINEERING, INC. P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	LOCATION NO: _____ C.O.C. NO: <u>6991</u>
--	--	--

FIELD REPORT: CLOSURE VERIFICATION	PAGE No: <u>1</u> of <u>1</u>
------------------------------------	-------------------------------

LOCATION: NAME: <u>Wesley</u> STATE WELL #: <u>1</u> PIT: <u>TANK DRAIN</u> QUAD/UNIT: <u>D</u> SEC: <u>16</u> TWP: <u>19N</u> RNG: <u>6W</u> PM: <u>NM</u> CNTY: <u>MCKST</u> NM QTR/FOOTAGE: <u>NW</u> NW CONTRACTOR: <u>EPC/A-PLUS</u>	DATE STARTED: <u>5/25/99</u> DATE FINISHED: <u>9/11/99</u> ENVIRONMENTAL SPECIALIST: <u>JC Blagg</u>
---	--


EXCAVATION APPROX. <u>18</u> FT. x <u>12</u> FT. x <u>6</u> FT. DEEP.	CUBIC YARDAGE: <u>50</u>
DISPOSAL FACILITY: <u>CTB</u> REMEDIATION METHOD: <u>LANDFARM</u>	
LAND USE: <u>STATE</u> LEASE: <u>STATE</u> FORMATION: _____	

FIELD NOTES & REMARKS:	PIT LOCATED APPROXIMATELY <u>110</u> FT. <u>N54°E</u> FROM WELLHEAD. DEPTH TO GROUNDWATER: <u>>100</u> NEAREST WATER SOURCE: <u>>1000</u> NEAREST SURFACE WATER: <u>>1000</u> NMOCED RANKING SCORE: <u>0</u> NMOCED TPH CLOSURE STD: <u>5000</u> PPM SOIL AND EXCAVATION DESCRIPTION: <u>Silty Sand, Dry, Gray brown, from 0'-4'</u> <u>Sandstone, Dry, 4'-6'.</u> <u>No odor or stain on (1), (2), (3) or (4).</u> <u>Lite odor, NO STAIN on (5).</u>
------------------------	--


CHECK ONE:	
☒	PIT ABANDONED
☐	STEEL TANK INSTALLED
☐	FIBERGLASS TANK INSTALLED

FIELD 418.1 CALCULATIONS

TIME	SAMPLE I.D.	LAB No:	WEIGHT (g)	mL. FREON	DILUTION	READING	CALC. ppm



PIT PERIMETER

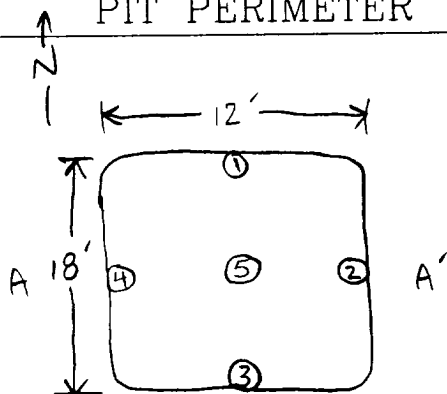


OVM RESULTS

SAMPLE ID	FIELD HEADSPACE PID (ppm)
1 N @ 6'	ND
2 E @ 6'	ND
3 S @ 6'	1.6
4 W @ 6'	16.0
5 C @ 6'	91.5

LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
C @ 6'	TPH 8015	1400

PIT PROFILE

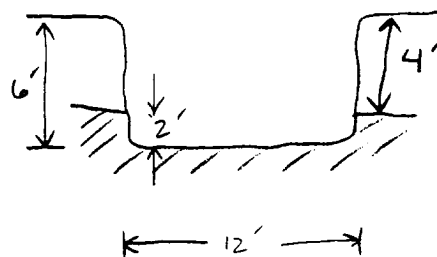

TRAVEL NOTES:	CALLOUT: _____	ONSITE: _____
---------------	----------------	---------------

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8015 Modified
Nonhalogenated Volatile Organics
Total Petroleum Hydrocarbons


Client:	Blagg / NMOCD	Project #:	403410
Sample ID:	Tank Drain C @ 6'	Date Reported:	05-26-99
Laboratory Number:	F393	Date Sampled:	05-25-99
Chain of Custody No:	6991	Date Received:	05-26-99
Sample Matrix:	Soil	Date Extracted:	05-26-99
Preservative:	Cool	Date Analyzed:	05-26-99
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	634	0.2
Diesel Range (C10 - C28)	3,780	0.1
Total Petroleum Hydrocarbons	4,410	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **Woosley. State No. 1.**


Analyst


Review

6991

ENVIROTECH INC.

5796 U.S. Highway 64
Farmington, New Mexico 87401
(505) 632-0615