

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐

2. NAME OF OPERATOR

Mesa Petroleum Co.

3. ADDRESS OF OPERATOR

1660 Lincoln St., #2800 Denver CO 80264

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1980' FSL & 970' FWL

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐


MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) Spud Notice & BOP Test ☒

SUBSEQUENT REPORT OF:

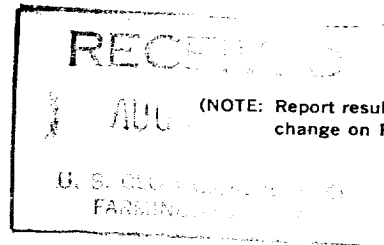

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Subject well was spudded at 12:30 PM 8/2/81. Drilled 12 1/4" hole to 254' KB. Ran 6 joints new 8 5/8" 24#/ft. STC surface casing and set at 242' KB. Cemented with 225 sacks class "B" containing 3% CaCl and 1/4#/sack cello-flake. Circulated 10 bbls. cement to surface. Nipple up BOP and tested to 1000 psi for 15 minutes - held okay.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Randy Nordgren TITLE Regulatory Coord. DATE August 3, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

NMOCC

BY SMH