

Agate 011


DC-521
MAGNOLIA PETROLEUM COMPANY

Jicarilla "D" #5 24
Blanco
Rio Arriba County, New Mexico

Ground Elevation - 7008'
All measurements are from 9' above
10-3/4" casing flange

10-22

*Emergent
I can't find any
evidence these papers
got produced by this dual
from your work?*

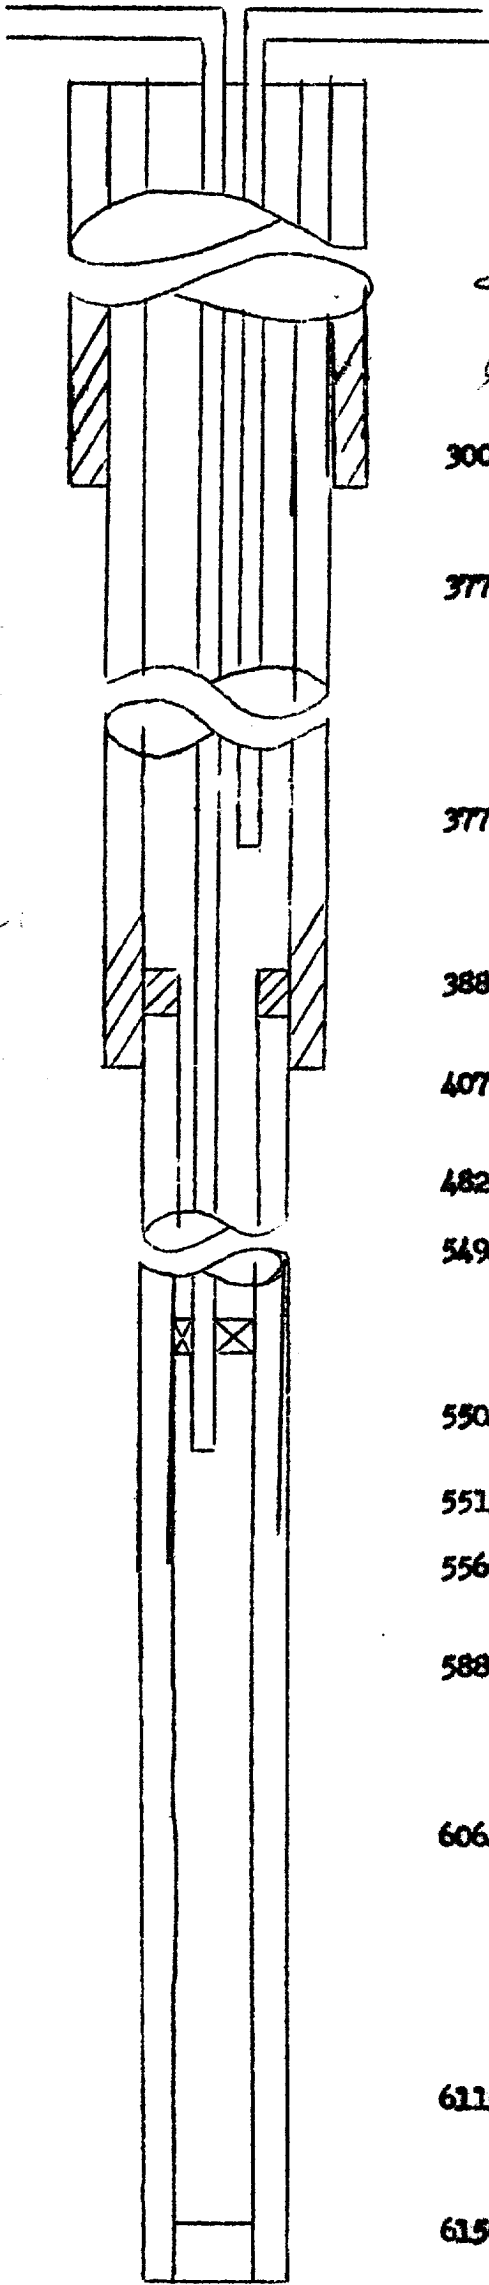

300' - 10 3/4" Casing w/250 sks. Circ.

3770' - Top of Pictured Cliffs
Perforated w/ 6 shots
per foot.
3782 - 3799
3831 - 3844
Total 180 shots

3777' - Bottom of 2" tubing

3886' - Top of 5 1/2" Liner

4070' - 7 5/8" Casing w/ 200 sks.

4820' - Top of Cement


5494' - Baker Model "D" Production Packer

5504' - Bottom of 2" Tubing

5513' - Top of Cliffhouse
Perforated w/ 6 shots
per foot.
5514 - 5523
5535 - 5549
5558 - 5565
5610 - 5618
5757 - 5764
5772 - 5780
5893 - 5930
5959 - 5966
5972 - 5976
6064' - Top of Mancos
5986 - 5990
6016 - 6026
6056 - 6062
Total 726 Shots

6115' - Plugged back total depth

6150' - Bottom of 5 1/2" liner w/125 sacks



1911

1912

1913

1914

1915

1916

1917

1918

1919

NEW MEXICO OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

6-1-56

PACKER-SETTING AFFIDAVIT
(Dual Completions)

STATE OF New Mexico)
County of San Juan) ss

L. H. Proctor, being first duly sworn according to law, upon his oath deposes and says:

That he is of lawful age and has full knowledge of the facts herein below set out.

That he is employed by Magnolia Petroleum Company in the capacity of Production Foreman and as such is its authorized agent.

That on Sept. 4,, 1957, he personally supervised the setting of a Baker Model "D" Magnolia Petroleum Company's
(Make and Type of Packer) in (Operator)
Jicarilla "D" Well No. 5
(lease) Letter M, Section 14, Township 26N, Range 3W, NMPM,
Rio Arriba County, New Mexico.

That said packer was set at a subsurface depth of 5494 feet, said depth measurement having been furnished by Perforating Guns Atlas Corporation.

That the purpose of setting this packer was to effect a seal in the annular space between the two strings of pipe where the packer was set so as to prevent the commingling, within the well-bore, of fluids produced from a stratum below the packer with fluids produced from a stratum above the packer. That this packer was properly set and that it did, when set, effectively and absolutely seal off the annular space between the two strings of pipe where it was set in such manner as that it prevented any movement of fluids across the packer.

Magnolia Petroleum Company
(Company)

L. H. Proctor
(its Agent)

Subscribed and sworn to before me this the 10th day of October, AD, 1957.

Michael A. Bryan
Notary Public in and for the County
of SAN JUAN, NEW MEXICO

My Commission Expires June 3, 1959.

