

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☒ well ☐ other

2. NAME OF OPERATOR  
Tenneco Oil Company


3. ADDRESS OF OPERATOR  
P. O. Box 3249, Englewood, CO 80155

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1120' FSL 1520' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:  
TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

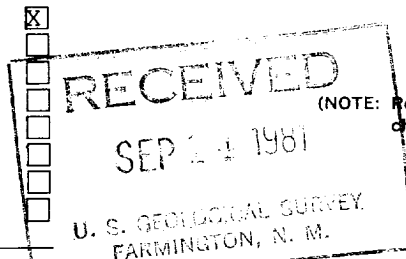

(NOTE: Report results of multiple completion or zone change on Form 9-338.)



5. LEASE  
Contract #110

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
Jicarilla

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Jicarilla A

9. WELL NO.  
2E

10. FIELD OR WILDCAT NAME  
Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 18, T26N R5W

12. COUNTY OR PARISH Rio Arriba 13. STATE New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6601 gr.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

8/16/81 - MIRURT. Spud 8-15/81 w/Four Corners #9. Ran 8 jts 9-5/8" 36# K-55 ST&C csg shoe @ 325'. Cmt w/250 sx Cl-B and 2% CACL2 and 1/4#/sx Flocele. Circ cmt to surface.

8/31/81 - Ran 17 jts 4-1/2" 11.6# and 159 jts 4-1/2" 10.5# K-55 ST&C csg. Set @ 7567'. DV @ 4525'. Cmt 1st stage w/325 sx D-79 and Diacel A. Tail w/100 sx Cl-B and 2% CACL2. Cmt 2nd stage w/716 sx D-79 and Diacel A. Tailed w/100 sx Cl-B and 2% CACL2. Circ cmt to surface. Release rig.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Production Analyst DATE 9/4/81

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

NMOCC

BY [Signature]