

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYLand Office San Juan
Lease No. 173089
Unit Scott

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	☒	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Well No. 2 is located 1450 ft. from N line and 1450 ft. from W line of sec. 23
Scott Exact footage will be reported after location is staked
November 13, 1955

SE NE 1/4 Sec. 23 27N 11W New Mexico
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
West Kitt San Juan New Mexico
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6455 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casing; indicate mudlogging jobs, cementing points, and all other important proposed work)

To Drill and test subject well to the pictured Cliffs Sand surface casing:
10-3/4" Armac to be set at Approx. 100' KB. & cemented with 50 sax & circulated to surface. WC. 24 Hrs. Production Casing 5 1/2" 14# J-55 casing to be set on top of pictured Cliffs Sand. Use centralizers & scratchers thru the Fruitland & cement with 75 sax 3% gel. WC 72 Hrs. Corin. & Testing: None planned. Logging: Electric log from TD. to surface 6sg. Detail## from TD. to Approx. 100' above Fruitland. Microlog from TD. to 1000' above TD. Run Gamma-Ray-neutron MS log in conjunction with perforating. Drilg. Time: Use 600000##
Geolograph from 110' to TD. Drift Surveys: At 50' intervals to 300'. thereafter at 250' intervals. Depth Measurements: SLM. of orig. pipe at Approx 150' above Fruitland, prior to DST. & at TD. Samples: Collect 10' samples from surface to 1700'. thereafter collect 5' samples to TD. Completion will be with cable tools & completion program determining after running Prod. casing.

Company THE BRITISH AMERICAN OIL PRODUCING COMPANYAddress P.O. Box 180Denver 1, ColoradoBy Sept 1955Title FIELD FORMAN

COMPANY British American Oil Producing Company


Well Name & No. Scott No. 5 Lease No. _____

Location 1650' from the South line and 1650' from the West line.

Being in SW 1/4 NE 1/4 SW 1/4

Sec. 23, T 27 N., R 11 W., N.M.P.M., San Juan County, New Mexico.

Ground Elevation 6392, ungraded.

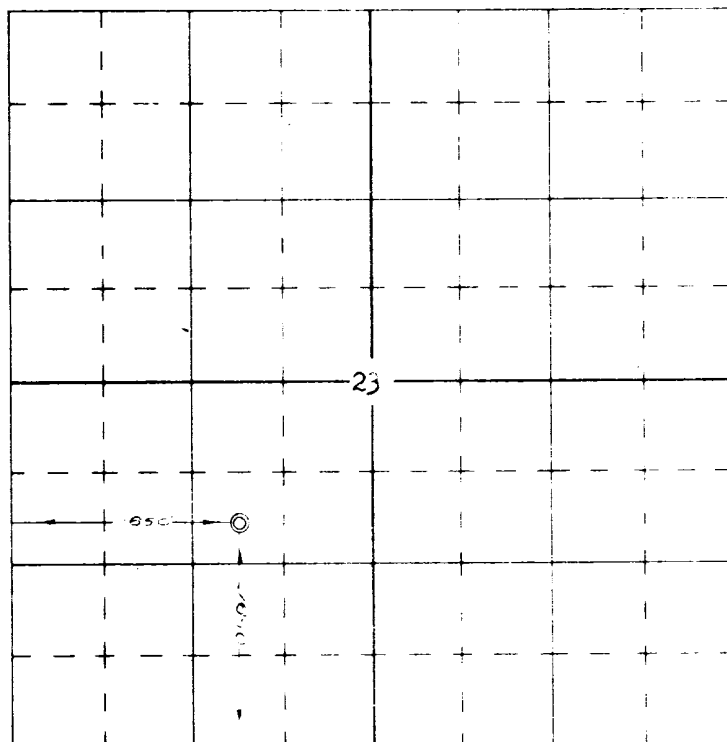

FARMINGTON


N



Scale -- 4 inches equals 1 mile

Surveyed November 19, 1955

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.



Frank J. Schreck
Registered Professional
Engineer and Land Surveyor.

P. O. Box 965
Paradise, New Mexico

November 25, 1955

The British-American Oil Producing Company
P. O. Box 180
Denver 1, Colorado

Per Santa Fe 67308

Sir:

Receipt is acknowledged of your "Notice of Intention to Drill" dated November 18, 1955 covering your well No. 5 Scott in NE 1/4 sec. 23, T. 27 N., R. 11 W., S. 2. P. 1., San Juan County, New Mexico, West Kutz pool.

Your proposed work is hereby approved subject to compliance with the provisions of the "Oil and Gas Operating Regulations" revised May 25, 1942, a copy of which will be sent to you on request, and subject to the following conditions:

1. Drilling operations so authorized are subject to the attached sheet for general conditions of approval.
2. Furnish copies of all logs.

Very truly yours,

P. T. McGrath
District Engineer

PTMcGrath:ac

