UNITED STATES

Subsurface Safety Valve: Manu. and Type _


18. I hereby certify that the foregoing is true and correct

5.	LEASE		. <u> </u>
	USA	NM-04202	

DEPARTMENT OF THE INTERIOR	USA NM-04202 6. IF INDIAN, ALLOTTEE OR TRIBE NAME 7. UNIT AGREEMENT NAME 8. FARM OR LEASE NAME Jackson	
GEOLOGICAL SURVEY		
SUNDRY NOTICES AND REPORTS ON WELLS		
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9–331–C for such proposals.) 1. Oil gas the proposals of the proposals.		
well Well As other	9. WELL NO. 3	
2. NAME OF OPERATOR Tenneco Oil Company	10. FIELD OR WILDCAT NAME Basin Dakota : 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA	
 3. ADDRESS OF OPERATOR P.O. Box 3249, Englewood, CO 80155 4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 		
below.)	Sec. 10, T28N, R9W	
AT SURFACE: 1430' FSL, 1140' FEL	12. COUNTY OR PARISH 13. STATE San Juan New Mexico	
AT TOP PROD. INTERVAL: AT TOTAL DEPTH:	14. API NO.	
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE,		
REPORT, OR OTHER DATA	15. ELEVATIONS (SHOW DF, KDB, AND WD) 6022' GR	
REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:		
FRACTURE TREAT	EIVED	
SHOOT OR ACIDIZE REPAIR WELL PULL OR ALTER CASING OCT	2 CHOTE Speport results of multiple completion or zon- change on Form 9–330.) PLOGICAL SURVEY NGTON, N. M.	
MULTIPLE COMPLETE		

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

9/28/82 - Finish LDDC, RU & run 46 jts. (2,038') 4-1/2" 10.5# K-55 ST&C csg. TIH w/liner set @ 6923', LC @ 6881', TOL @ 4885'. Blow 1-1/4 hrs. thru 9' of fill. Cmt. w/90 sx (186 CF) Cl-B + 2% D-79 + .6% D-60. Tail w/150 sx (177 CF) Cl-B. Displace 68 bbl. Did not bmp plug. PD @ 11:45 A.M. 9/28/82. Set packoff. Reverse out 10 bbls. brownish oil, 20 bbls. CW-100, 10 bbls. cmt. LDDP & strip cellar. Rig released @ 2:45 P.M., 9/28/82.

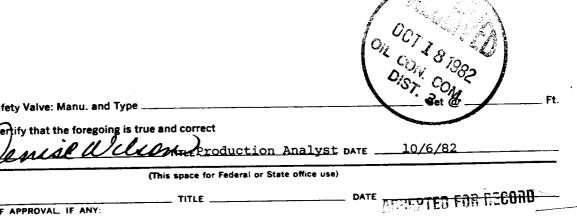

OCT 15 1982

*See Instructions on Reverse Side

NMOCC

Sm m