

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE\*  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SF 078197

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Nye

9. WELL NO.

8

10. FIELD AND POOL, OR WILDCAT

Aztec Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec. 9, T-29-N, R-10-W  
NMPM

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

5775'GL

12. COUNTY OR PARISH

San Juan

13. STATE

New Mex.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON\*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING


ABANDONMENT\*

(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) \*

3-16-72 T.D. 2289'. Ran 73 joints 2 7/8", 6.4#, J-55 production casing, 2279' set at 2289'. Baffle set at 2279'. Cemented with 412 cu. ft. cement. WOC 18 hours. Top of cement at 820'.

5-30-72 PBTD 2279'. Perf'd 2172-84' and 2194-2204' with 30 shots per zone. Fraced with 30000# 10/20 sand and 26,590 gallons treated water. Dropped one set of 30 balls. Flushed with 600 gallons water.

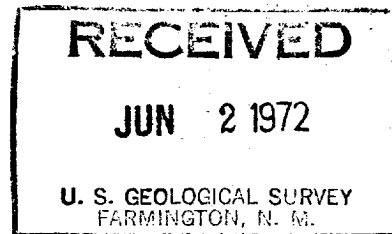

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Petroleum Engineer

DATE June 2, 1972

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: