

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SF 078336

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Florance

9. WELL NO.

104

10. FIELD AND POOL, OR WILDCAT

Blanco Pictured Cliffs

11. SEC., T., R., M., OR BLEK. AND
SURVEY OR AREA

Sec 11, T-30-N, R-9-W

12. COUNTY OR PARISH

San Juan

13. STATE
New Mexico

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. ☐ OIL WELL ☐ GAS WELL ☒ OTHER
2. NAME OF OPERATOR
Tenneco Oil Company
3. ADDRESS OF OPERATOR
P. O. Box 1714, Durango, Colorado 81301
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
1100 FNL, 1020 FEL
Unit A
14. PERMIT NO.
15. ELEVATIONS (Show whether DF, RT, GR, etc.)
5869 Gr.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spud 10/2. Ran 3 jts 8-5/8" 20# casing and 1 jt. 24# casing set @ 163. Cemented w/150 sacks cmt. Well blew out at 352, blew down. Drilled to 2501 and well blew out again. Hooked up blewie line. Increased mud weight, well blew out again at 2643, killed well and increased mud weight. Drilled to TD 2787 on 10/6/67. Attempted to log, well blew out. Ran 88 jts 3-1/2" 7.7# casing set @ 2785. Cemented w/600 sacks cement. Held pressure on casing for 6 hrs. Released rig at 9 PM 10/7. WO Comp.

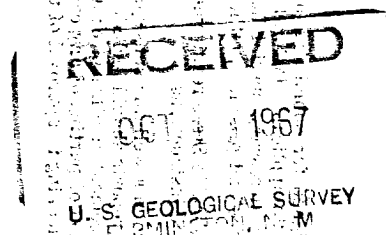

18. I hereby certify that the foregoing is true and correct

SIGNED

M. K. Wagner

TITLE

DATE

October 9, 1967

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

USGS (5)

Cont (1)

*See Instructions on Reverse Side