


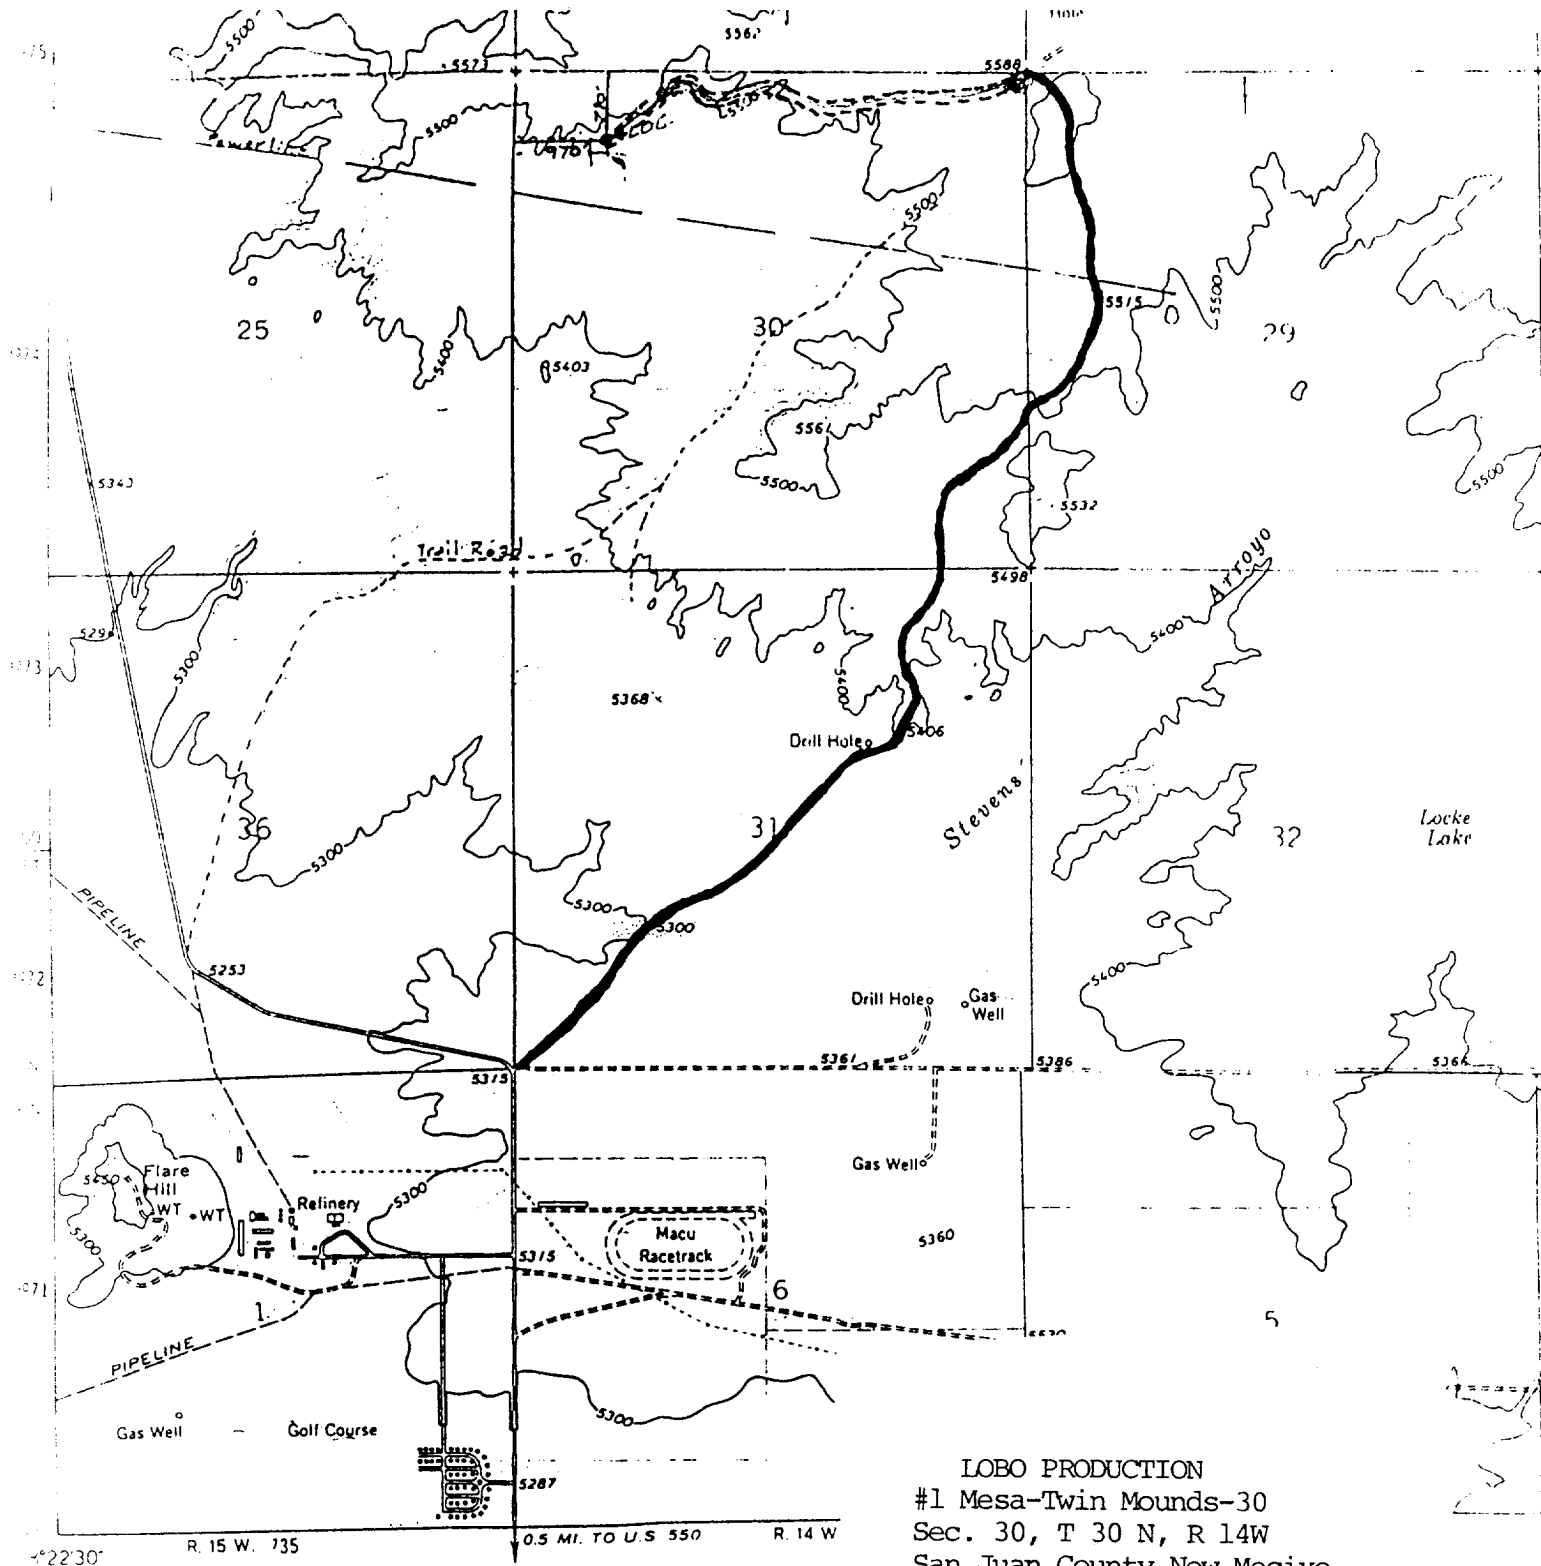

LOBO PRODUCTION
#1 Mesa-Twin Mounds-30
Sec. 30, T 30 N, R 14W
San Juan County New Mexico

Map # 1

1:24,900
29 MILS

UTM GRID AND 1963 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

FOR SALE BY U.S. GEOLOGICAL SURVEY
A FOLDER

Mapped, edited, and published by the Geological Survey

Control by USGS, USC&GS, and U.S. Bureau of Reclamation

Topography by photogrammetric methods from aerial
photographs taken 1958 and 1962. Field checked 1963

Polyconic projection 1927 North American datum

1000 foot grid based on New Mexico coordinate system, west zone

Universal Transverse Mercator grid ticks

shown in blue

Selected fence lines

Selected fence lines

EXISTING ROAD —————
NEW (PROPOSED) ROAD - - - - -

Perforations Gallup:

4729, 4235, 4752, 4758, 4764, 4767, 4775, 4777, 4779, 4785, 4811, 4814,
4818, 4840, 4879, 4966, 4981, 4988, 4998, 5023, 5037, 5049, 5078,
5080, 5123, 5161,

Perforations Dakota:

5545, 5549, 5550, 5552, 5618, 5619, 5620, 5621, 5622, 5623, 5634,
5635, 5636, 5637, 5638, 5639, 5640, 5708, 5710.

Cement Record and Additives:

Cemented in 2 stages, 1st stage 400 sks (544 cuft) Class B with 6 1/4# /sk gil-
sonite, 1/4#/sk Floseal, 8#/sk salt,

2nd Stage: 200 sks (320 cuft) Class B, 65/35 poz, with 12% gel, 10#/sk
gilsonite followed by 400 sks (848 cuft) 65/35 poz with 6% gel, 10# sk gilsonite,
followed by 50 sks. (59 cuft.) Class B neat

RECEIVED

AUG 4 - 1983

OIL CON. DIV.
DIST. 3